

BANDIT AIR SCREEN

ITEM: _____ QUANTITY: _____

MODEL # SCRFC

SPECIFICATIONS

The SCRFC series is a grab and go refrigerator. The self-contained refrigeration system includes digital controls allowing unit to engage in minimal defrost cycles. Front mounted red indicator light alerts operator if condensing unit requires cleaning. Unique baffled compressor housing for front air intake, top rear air discharge reducing noise levels plus zero clearance from wall installation.

Available depths: 32 3/8"

Available lengths: 36" 48" 60" 72"

Available heights: 60" 78"



STANDARD FEATURES

- Self-Contained Refrigeration
- Metal Frame Base Construction with Lift Out Black Louvered Air Grill for Easy Access to Compressor
- Brushed Aluminum Interior Ends
- Standard Grade Laminated Exterior with T-Mold Edge Protection
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Perforated Stainless Steel Interior Back Panel
- T5 Quick Snap-in Top Canopy Light
- (2) Adjustable Stainless Steel Extra Deep Shelves for Maximum Capacity (60" High Unit)
- (4) Adjustable Stainless Steel Extra Deep Shelves for Maximum Capacity (78" High Unit)
- Electronic Digital Control and Defrost Termination
- Red Indicator Lights Alerts Operator if Condenser Requires Cleaning
- Digital Temperature Display
- Unique Internal Baffle Design for Compressor Noise Reduction
- Front Air Intake with Top Rear Air Discharge for Zero Clearance
- Electric Condensate Evaporator Pan
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty



OPTIONAL FEATURES

- Green Screen
- Stainless Steel Exterior Finish with Standard T-Molding
- Special Laminates
- Miscellaneous Trim
- Wood Veneers (Unfinished)
- Wood Veneers (Stained & Sealed)
- T5 Quick Snap-in Lights Under Shelves
- Promolux Lighting (Low UV)
- Wire Shelves:
 - Brass White Black Chrome
- Casters
- Bullet Feet
- Powder Coated Interior Back Panel and Hardware:
 - Black White Custom Color
- Mirrored Polished Stainless Steel Interior Ends
- Mirrored Polished Stainless Steel Interior Back
- Finished Back with Black Air Grill
- Stainless Steel Louvered Air Grill
- Solid Insulated Rear Sliding Doors
- See Through insulated Rear Sliding Doors
- Removable Locking Security Panels
- Pull Down Econo Night Shade
- #23 Econo Frost Night Shade
- Tie In Strips for Interconnection of Units
- Extra Large Heavy Duty Electric Condensate Evaporator Pan
- Easy Slide-out Condensing Unit
- Remote Refrigeration
- 5 Year Compressor Warranty

BANDIT AIR SCREEN

TOLL FREE: 800-525-3692

MODEL # SCRFC

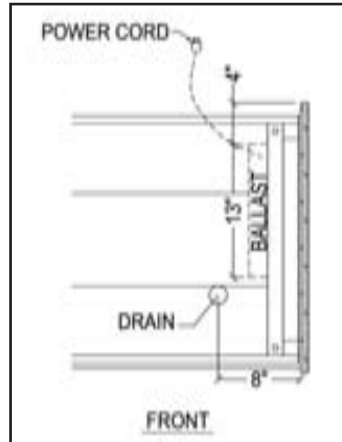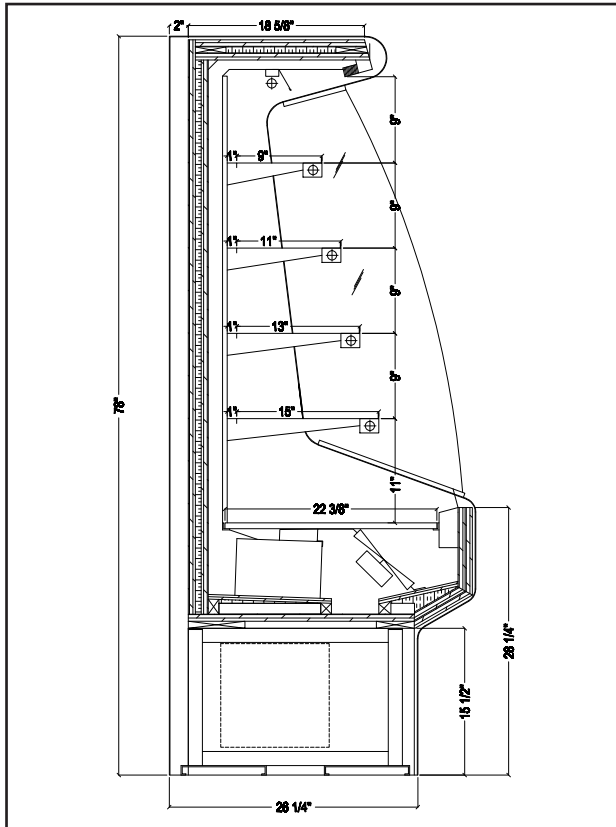

NOTE: A minimum of 12" clearance needed above unit for air discharge for self contained units.

Electrical & Plumbing locations



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120

MODEL	L	D	H	COMP HP	VOLT	AMP	NEMA PLUG	WT	REFRIG
SCRFC3660R	36	32 3/8	60	1/2	(2)115V	10.2/8.3	(2) 5-15P	575	134A
SCRFC4860R	48	32 3/8	60	3/4	115/208-230 4 wire	16.3	L14-20P	675	404A
SCRFC6060R	60	32 3/8	60	1 1/4	115/208-230 4 wire	16.8	L14-30P	775	404A
SCRFC7260R	72	32 3/8	60	1 1/4	115/208-230 4 wire	17.4	L14-30P	875	404A
SCRFC3678R	36	32 3/8	78	1/2	(2)115V	10.2/8.3	(2) 5-15P	625	134A
SCRFC4878R	48	32 3/8	78	3/4	115/208-230 4 wire	16.6	L14-20P	700	404A
SCRFC6078R	60	32 3/8	78	1	115/208-230 4 wire	17.3	L14-30P	825	404A
SCRFC7278R	72	32 3/8	78	1	115/208-230 4 wire	18.0	L14-30P	950	404A

1. The 3 ft. unit requires 2 circuits. Total Amps for the 4, 5, 6 ft. units includes 4.8 Amps for the condensate evaporator.
2. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
3. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet.
RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

