

VIENNA GRAVITY COIL

ITEM: _____ QUANTITY: _____

MODEL # VICC G

SPECIFICATIONS

The VICC-G is a combination of our Vienna Grab 'n' Go and Cold Display. The upper display area is full service with gravity coil for use with sushi/seafood and open meats. The lower area is self service and includes (1) refrigerated shelf w/lights. The rear houses an area for cold pans and includes a sliding utility board. Designed to accommodate standard hotel/foodservice pans (to be purchased by others).



Available depths: 51 5/8" *

Available heights: 53 7/8" Available lengths: 47 1/4" 59" 72 7/8"

STANDARD FEATURES

- 304 Stainless Steel Exterior
- Gravity Coil (Upper Section)
- Tempered Tilt-Out Curved Glass with Side Glass Panels (Upper Section)
- Sliding Rear Doors (Upper Section)
- Sliding Utility Board (Rear)
- Easy Removable Deck Pans for Cleaning
- Programmable Digital Refrigeration Controller
- Forced Air Cooling System
- Lift Up Evaporator
- Hot Gas Condensate Evaporator Pan
- Environmentally Safe Refrigerant

OPTIONAL FEATURES

- Remote Refrigeration
- 5 Year Compressor Warranty



MODEL	L	D*	H	AIRSCREEN	COLD DISPLAY	VOLT	AMP	NEMA PLUG	WT	REFRIG
VICC-48-R-SC-G	47 1/4	51 5/8	53 7/8	3/4	3/8	115/208-230	13	L14-20P	1175	134A/404A
VICC-60-R-SC-G	59	51 5/8	53 7/8	7/8	1/2	115/208-230	17	L14-30P	1250	134A/404A
VICC-72-R-SC-G	72 7/8	51 5/8	53 7/8	1 1/4	1/2	115/208-230	21	L14-30P	1385	134A/404A

*Depth does not include slide-out cutting board. Add 15 3/8" in open position.

VIENNA GRAVITY COIL

TOLL FREE: 800-525-3692

MODEL # VICC G

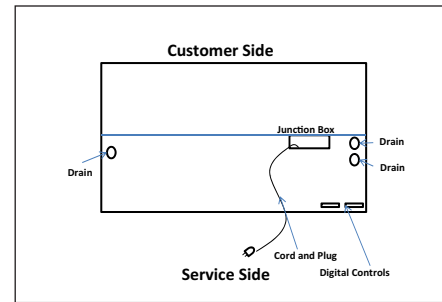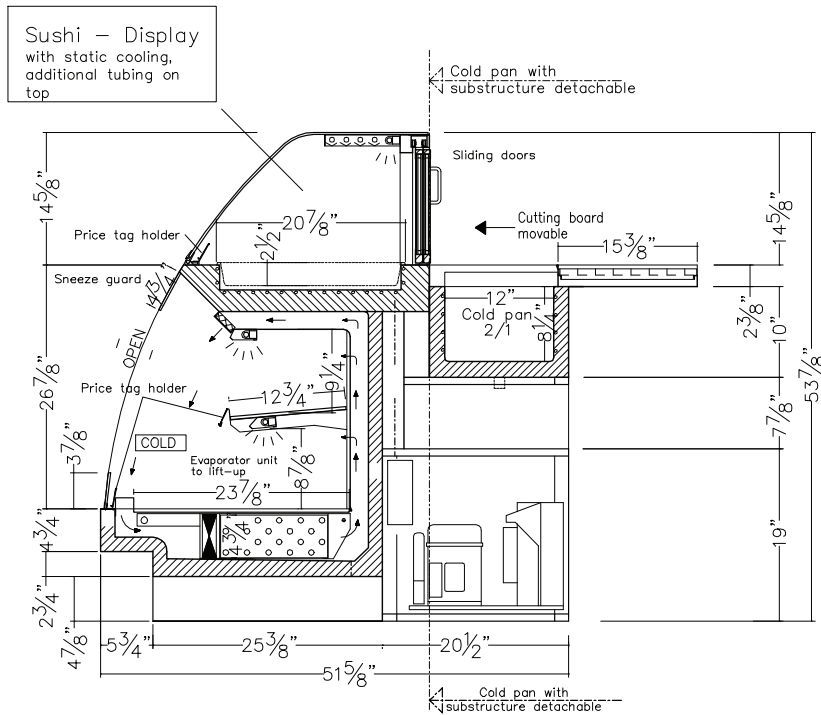


Electrical & Plumbing locations




Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No. 120


VICC-48-R-SC-G

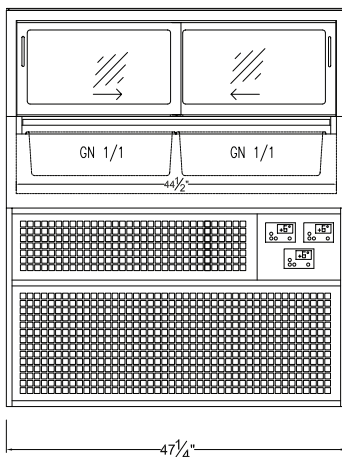

VICC-60-R-SC-G

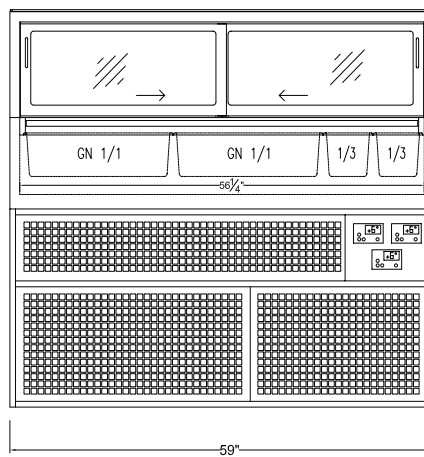

VICC-72-R-SC-G

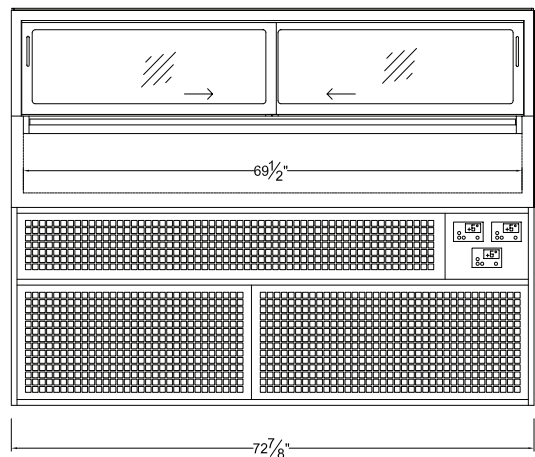

1. A 1" diameter drain is provided. The drain **MUST** be run to a floor drain **AT TIME OF INSTALLATION**.
2. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

