

VISI-BOND PROTECTOR GUARD


ITEM: _____ QUANTITY: _____

MODEL # VSB

SPECIFICATIONS


UV Bonded glass showcases the latest design in Protector Guards with clean, crisp seams that attach horizontal and vertical glass without the need for noticeable adhesive joints.

Flush mounting brackets secure the glass to the counter using horizontal stainless, concealed hardware eliminating the need for noticeable fasteners. The end result... inconspicuous Protector Guards

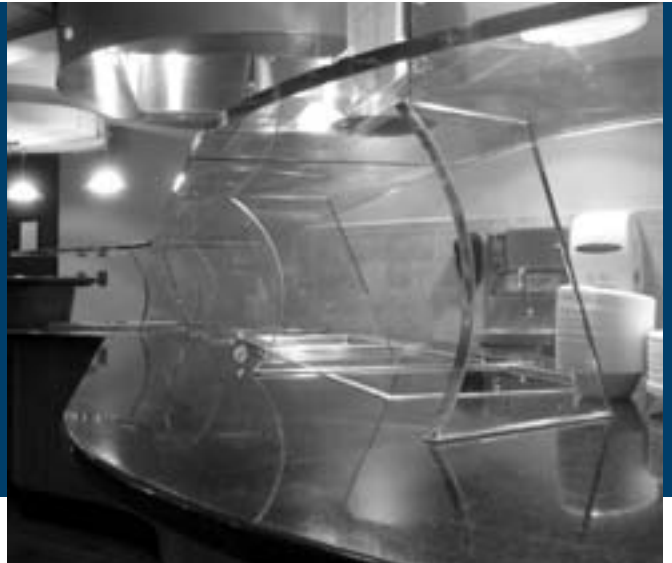

STANDARD FEATURES

- 3/4 " Thick Tempered glass vertical and horizontal supports with all polished edges.
- 14 gauge Stainless Steel Bottom Plate bonded to underside of glass. Plate has stainless steel weld studs fastened to the bottom that pass through the counter top for fastening the VISI-BOND guard to counter top.
- Glass thickness based upon run of shield. Typically, 1/2" thick glass used up to 54" length. 3/4" glass runs up to 90" with an additional vertical support.

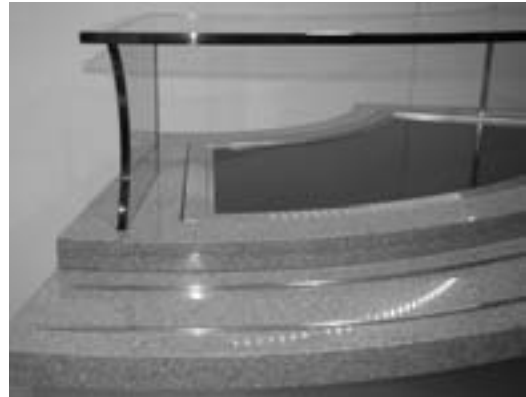

OPTIONAL FEATURES

- Fluorescent lights in stainless steel housing
- Xenon lights in stainless steel housing
- LED lights in stainless steel housing
- Infrared heat lamp in stainless steel housing
- Halogen heat lamp in stainless steel housing
- Halogen heat lamp with Xenon lights in stainless steel housing
- Remote on/off switches



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120

CONTACT OUR FACTORY FOR DESIGN ASSISTANCE.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI REGAL
PINNACLE
INTEGRATIONS INDUSTRIES, INC.