

OLYMPUS AIR SCREEN

ITEM: _____ QUANTITY: _____

MODEL # SCAS

Shown with standard features.

SPECIFICATIONS

The SCAS is a metal framed base refrigerated self-service display case with a choice of standard grade plastic laminate exterior. Unique design allows zero clearance from wall.



Available depths: 32" 29 3/4" with rear doors

Available lengths: 36" 48" 60" 72" 84" 96"

STANDARD FEATURES

- Self-Contained Refrigeration
- Rounded Top Canopy
- Metal Frame Base Construction with Lift Out Black Louvered Air Grill for Easy Access to Compressor
- Stainless Steel Interior Ends
- Standard Grade Laminated Exterior
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Perforated Stainless Steel Interior Back Panel
- T5 Quick Snap-in Top Canopy Light
- (3) Adjustable Stainless Steel Extra Deep Shelves for Maximum Capacity, with T5 Quick Snap-in Lights
- Pull Down Energy Saving Night Curtain
- Electronic Digital Control and Defrost Termination
- Red Indicator Lights Alerts Operator if Condenser Requires Cleaning
- Digital Temperature Display
- Unique Internal Baffle Design for Compressor Noise Reduction
- Front Air Intake with Top Rear Air Discharge for Zero Clearance
- Electric Condensate Evaporator Pan 3', 4', 5' and 6' Units Only
- Floor Drain Required 7' and 8' Units
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty



OPTIONAL FEATURES

- Green Screen
- Stainless Steel Exterior Finish
- Special Laminates
- Miscellaneous Trim
- Wood Veneers (Unfinished)
- Wood Veneers (Stained & Sealed)
- Promolux Lighting (Low UV)
- Wire Shelves:
 - Brass White Black Chrome
- Casters
- Bullet Feet
- Powder Coated Interior Back Panel and Hardware:
 - Black White Custom Color
- Mirrored Polished Stainless Steel Interior Ends
- Mirrored Polished Stainless Steel Perforated Back
- Finished Back with Black Air Grill
- Stainless Steel Louvered Air Grill
- Solid Insulated Rear Sliding Doors
- See Through Insulated Rear Sliding Doors
- Glass Vision End Panels
- Removable Locking Security Panels
- Roll Down Locking Security Cover
- Pull Down Econo Night Shade
- #23 Econo Frost Night Shade
- Fold Down Stainless Steel V-Ribbed Tray Slide
- Fold Down Corian Tray Slide
- Stationary Corian Tray Ledge
- Tie In Strips for Interconnection of Units
- Extra Large Heavy Duty Electric Condensate Evaporator Pan
- Easy Slide-out Condensing Unit
- Remote Refrigeration
- 5 Year Compressor Warranty

OLYMPUS AIR SCREEN

TOLL FREE: 800-525-3692

MODEL # SCAS

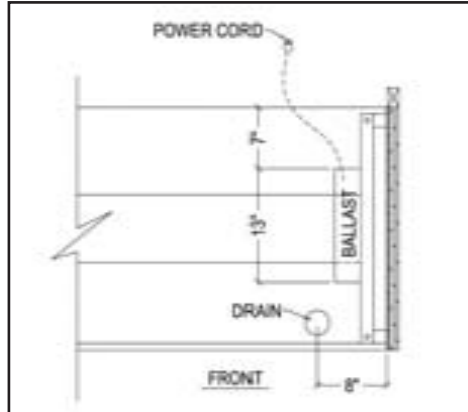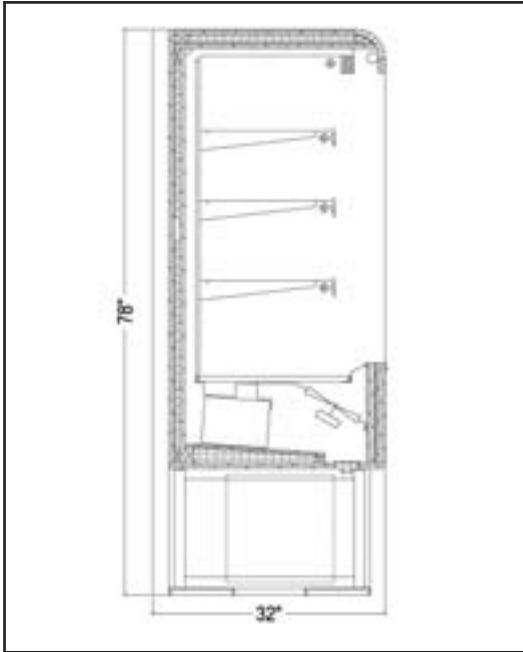

NOTE: A minimum of 12" clearance needed above unit for air discharge for self contained units.

Electrical & Plumbing locations



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

| MODEL | L | D | H | COMP HP | VOLT | AMP | NEMA PLUG | WT | REFRIG |
|-----------|----|----|----|---------|--------------------|----------|-----------|------|--------|
| SCAS36R | 36 | 32 | 78 | 1/2 | (2)115V | 10.7/8.3 | (2)5-15P | 675 | 134A |
| SCAS48R | 48 | 32 | 78 | 3/4 | 115/208-230 4 wire | 16.4 | L14-20P | 900 | 404A |
| SCAS60R | 60 | 32 | 78 | 1 1/4 | 115/208-230 4 wire | 17.1 | L14-30P | 1020 | 404A |
| SCAS72R | 72 | 32 | 78 | 1 1/4 | 115/208-230 4 wire | 17.7 | L14-30P | 1150 | 404A |
| SCAS84R** | 84 | 32 | 78 | 1 1/2 | 115/208-230 4 wire | 15.7 | L14-20P | 1225 | 404A |
| SCAS96R** | 96 | 32 | 78 | 1 1/2 | 115/208-230 4 wire | 15.7 | L14-20P | 1400 | 404A |
| SCAS36D | 36 | 32 | 78 | N/A | 115 | 1.0 | 5-15P | 375 | |
| SCAS48D | 48 | 32 | 78 | N/A | 115 | 1.0 | 5-15P | 500 | |
| SCAS60D | 60 | 32 | 78 | N/A | 115 | 1.0 | 5-15P | 625 | |
| SCAS72D | 72 | 32 | 78 | N/A | 115 | 1.0 | 5-15P | 750 | |
| SCAS84D** | 84 | 32 | 78 | N/A | 115 | 2.0 | 5-15P | 875 | |
| SCAS96D** | 96 | 32 | 78 | N/A | 115 | 2.0 | 5-15P | 975 | |

** SCAS84 and SCAS96 require a floor drain. No evaporation pan available.

1. The 3 ft. unit requires 2 circuits. Total Amps for the 4, 5, 6 ft. units includes 4.8 Amps for the condensate evaporator.
2. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
3. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

