

## MODEL # C6X-E - HFS

### SPECIFICATIONS

The Excel Series C6X-E is designed to help you sell food. It is a high capacity convertible merchandiser that can hold any medium temp product, from fresh meat to dairy to cut produce. Full view glass ends and stainless steel reflective ends are two excellent display options that help you create an endless product view. Shelves can be positioned at any height for greater merchandising flexibility. Optional lighted canopy signs can be used to announce specials, advertise brands, promote store slogans and more.



Available lengths: ☐ 48 3/8" ☐ 96 3/8" ☐ 144 1/2"

Available depths: ☐ 42"

Available heights: ☐ 87 3/8"



UNIT SHOWN WITH OPTIONAL SHELVES  
AND VIEW END PANELS

### STANDARD FEATURES

- DOE 2017 Compliant
- Remote Refrigeration
- All Metal Construction
- Hussmann Standard Paint & Bumper Colors  
(Consult Factory for Available Colors)
- (1) Row Top Canopy Lighting
- 30 1/4" Base Deck Display
- Low Profile Base with Glass Front
- Front Cart Bumper
- Energy Efficient Coil
- Hardwire Direct
- Listed in Accordance with UL 471  
and NSF 7 Standards
- 5 Year Modular Coil Warranty
- Floor Drain Required

### OPTIONAL FEATURES

- ☐ Stainless Steel Exterior Finish
- ☐ Hussmann Optional Colors  
(Consult Factory for Available Colors)
- ☐ Up to (6) Rows of Optional Shelves  
(Consult Factory for More Information)
- ☐ Up to (3) Additional Row of Top Canopy Lighting  
(Consult Factory)
- ☐ Lighting Under Shelves  
(Consult Factory for All Available Options)
- ☐ Solid End Panels
  - ☐ Right ☐ Left ☐ Both Ends
- ☐ View End Panels
  - ☐ Right ☐ Left ☐ Both Ends
- ☐ Contour End Panels
  - ☐ Right ☐ Left ☐ Both Ends
- ☐ Solid End Panels with Mirrored Interior  
(Consult Factory for Additional Information)
- ☐ E-Plus (EP) Extra-High Efficiency Coil  
(Reduces Energy Costs by 18%)

## MODEL # C6X-E - HFS



### REMOTE - REFRIGERATED

MODEL	L*	D	H	BTU / HR**	VOLTS	AMPS	EVAP. TEMP °F	PLUG	WT	REFRIG.
C6X-4'-HFS	48 3/8	42	87 3/8	1924	120	0.6	21	Hardwire	600	Verify
C6X-8'-HFS	96 3/8	42	87 3/8	1924	120	1.2	21	Hardwire	1200	Verify
C6X-12'-HFS	144 1/2	42	87 3/8	1924	120	1.8	21	Hardwire	1900	Verify

\* LENGTHS INCLUDE END PANELS

\*\* BTU / HR FOR DAIRY, DELI, PRODUCE

**Note: Please use Hussmann's technical data sheets to get precise dimensions for all store layout purposes.**

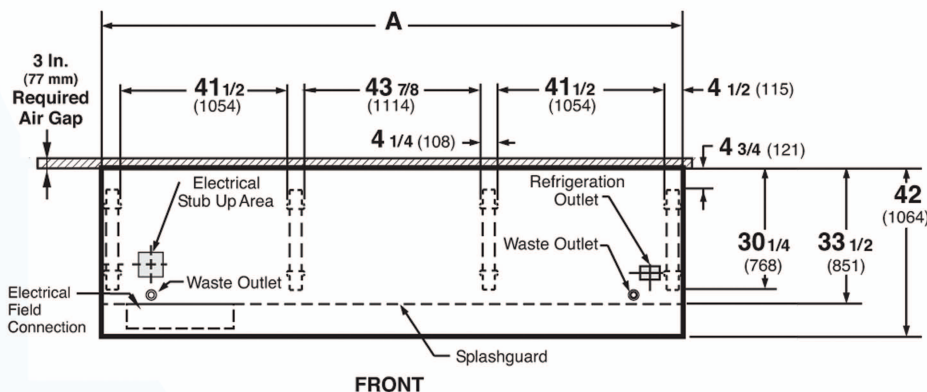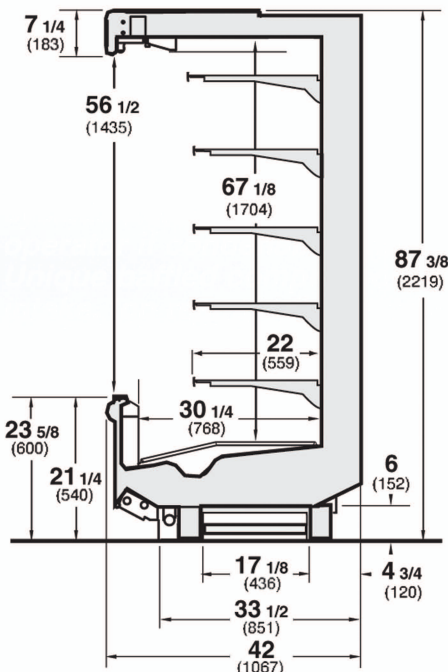

### Electrical & Plumbing locations

Dimension	8 FT	12 FT
A	96 3/8 (2448)	144 1/2 (3670)

#### Notes:

Case-to-case electrical connections are made in front of splashguard.

Overall case length without ends or partitions.



Conforms to UL Standard 471,  
and NSF Standard 7; Certified  
To CSA Standard C22.2 No.120



**Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards**

1. For optimum performance, these models are designed for use in air-conditioned stores where temperature and humidity are maintained at 75°F and 55% R.H. Locate case away from direct sunlight, rapid air currents and extreme temperature changes. Case is designed for holding pre-chilled product only.

RPI in line with its current policy reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes improvements, additions, or replacements for equipment previously sold or shipped.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055

**RPI INDUSTRIES, INC.** v1.13