

## MODEL # D5X-LRE - HFS

### SPECIFICATIONS

The Excel Series D5X-LRE is designed for easy rear loading from a cooler adjacent to the back of the case. Product is stocked quickly and stays cold. This is a benefit in heavy traffic stores with rapid product turnover. Doors are constructed in three panels, with one three panel door opening every four feet. The three panels can slide together to the right or the left, so you have complete rear access to the full merchandising area in front of each door opening.



Available lengths: ☐ 75 3/8" ☐ 99 3/8" ☐ 147 1/2"

Available depths: ☐ 45 1/4"

Available heights: ☐ 81 7/8"



UNIT SHOWN WITH OPTIONAL SHELVES  
AND SOLID END PANELS


### STANDARD FEATURES

- DOE 2017 Compliant
- Remote Refrigeration
- All Metal Construction
- Hussmann Standard Paint & Bumper Colors  
(Consult Factory for Available Colors)
- (1) Row Top Canopy Lighting
- Solid Rear Sliding Doors
- 30 1/8" Base Deck Display
- Front Cart Bumper
- Energy Efficient Coil
- Hardwire Direct
- Listed in Accordance with UL 471  
and NSF 7 Standards
- 5 Year Modular Coil Warranty
- Floor Drain Required

### OPTIONAL FEATURES

- ☐ Stainless Steel Exterior Finish
- ☐ Hussmann Optional Colors  
(Consult Factory for Available Colors)
- ☐ Up to (4) Rows of Optional Shelves  
(Consult Factory for More Information)
- ☐ Up to (3) Additional Rows of Top Canopy Lighting  
(Consult Factory)
- ☐ Lighting Under Shelves  
(Consult Factory for All Available Options)
- ☐ Solid End Panels
  - ☐ Right ☐ Left ☐ Both Ends
- ☐ View End Panels
  - ☐ Right ☐ Left ☐ Both Ends
- ☐ Contour End Panels
  - ☐ Right ☐ Left ☐ Both Ends
- ☐ Solid End Panels with Mirrored Interior  
(Consult Factory for More Information)
- ☐ Illuminated Canopy Signs
- ☐ Pull Down Night Curtain

## MODEL # D5X-LRE - HFS

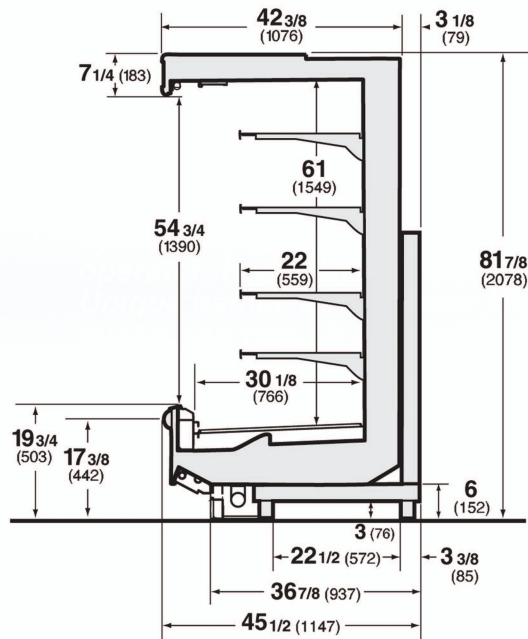

## REMOTE - REFRIGERATED

MODEL	L*	D	H	BTU / HR**	VOLTS	AMPS	EVAP. TEMP °F	PLUG	WT	REFRIG.
D5X-6LRE-HFS	75 3/8	45 1/4	81 7/8	9690	120	20	24	Hardwire	1050	Verify
D5X-8LRE-HFS	99 3/8	45 1/4	81 7/8	12920	120	20	24	Hardwire	1300	Verify
D5X-12LRE-HFS	147 1/2	45 1/4	81 7/8	19380	120	20	24	Hardwire	1750	Verify

\* LENGTHS INCLUDE END PANELS

\*\* ADD 10 BTU / HR PER SHELF ROW FOR LED LIGHT FIXTURES


\*\* ADD 20 BTU / HR PER SHELF ROW FOR LED LIGHT FIXTURES

**Note:** Please use Hussmann's technical data sheets to get precise dimensions for all store layout purposes.

## Rear Sliding Doors for Easy Stocking



## Sliding Doors Provide Full Access

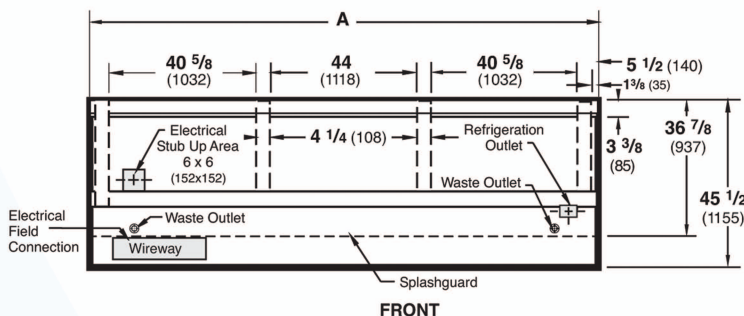

## Electrical & Plumbing locations

Dimension	8 FT	12 FT
A	96 3/8 (2448)	144 1/2 (3670)

### Notes:

Case-to-case electrical connections are made in front of splashguard.

Overall case length without ends or partitions.



Conforms to UL Standard 471,  
and NSF Standard 7; Certified  
To CSA Standard C22.2 No.120



**Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards**

1. For optimum performance, these models are designed for use in air-conditioned stores where temperature and humidity are maintained at 75°F and 55% R.H. Locate case away from direct sunlight, rapid air currents and extreme temperature changes. Case is designed for holding pre-chilled product only.

RPI in line with its current policy reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes improvements, additions, or replacements for equipment previously sold or shipped.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055