

MODEL # DBP-03 - HFS

SPECIFICATIONS

The Specialty Series DBP-03 Island Produce Display offers flexible merchandising built to your produce department's requirements for center divider and product height. In addition, we can supply flat racks or multi level steps. Custom panels can be added to match your store's produce department design.



Available lengths: ☐ 98 1/4" ☐ 122 1/4" ☐ 146 1/4" ☐ 170 1/4" ☐ 194 1/4"
☐ 218 1/4" ☐ 242 1/4" ☐ 266 1/4" ☐ 290 1/4" ☐ 314 1/4"
☐ 338 1/4" ☐ 338 1/4" ☐ 362 1/4" ☐ 386 1/4"



Available depths: ☐ 70 1/4"

Available heights: ☐ 39"

STANDARD FEATURES

- DOE 2017 Compliant
- Remote Refrigeration
- Low Center Divider - 8" Aluminum
- Green Epoxy Flat Wire Racks
- Painted Exterior
- Urethane-Coated Interior
- Plastic Product Dividers Every 24"
- Price Tag Wire with Chrome Posts
- 1" Black Vinyl Cart Bumper
- Insulated Interior Deck (Refrigerated)
- Package-Type Forced Air Coil (Refrigerated)
- Solar Digital Thermometer (Refrigerated)
- Expansion Valve Installed (Refrigerated)
- Please Reference Color Chart for Choice of Standard Hussmann Paint and Finish Options
- ETL Listed / ETL Sanitation Listed
- Environmentally Safe Refrigerant

OPTIONAL FEATURES

- ☐ Green Epoxy Step Wire Racks with Plastic Product
- ☐ Dividers Every 24" (Racks Available in Black, Flat or Steps)
- ☐ Additional Product Dividers
- ☐ High Center Divider (24, 30, 38")
- ☐ Scale Hangers (Single/Double)
- ☐ Price Tag Molding
- ☐ Lighted Shelves
- ☐ Bag Racks
- ☐ Optional Hand Rail Heights
- ☐ Thermostat (Refrigerated)
- ☐ Water Outlets with Quick Disconnect (Refrigerated)
- ☐ Water Spray Hose (Refrigerated)
- ☐ Ledge Light
- ☐ Energy Efficient Fan Motors (Refrigerated)
- ☐ 5' Wide Case
- ☐ Custom Exterior Lengths and Body Panel Options (Consult Your Hussmann Sales Representative)

NOTE: Does not hold processed produce or juice temperatures.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055




INDUSTRIES, INC.


v1.13

MODEL # DBP-03 - HFS

REMOTE - REFRIGERATED

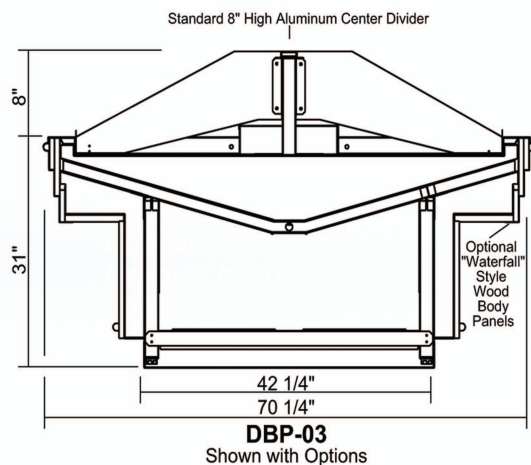


MODEL	L*	D	H	BTU / HR	VOLTS	AMPS	EVAP. TEMP °F	PLUG	WT	REFRIG.
DBP-03-8'-HFS	98 1/4	70 1/4	39	6900	120	.60	18	Hardwire	1300	Verify
DBP-03-10'-HFS	122 1/4	70 1/4	39	8625	120	.90	18	Hardwire	1625	Verify
DBP-03-12'-HFS	146 1/4	70 1/4	39	10350	120	1.20	18	Hardwire	1950	Verify
DBP-03-14'-HFS	170 1/4	70 1/4	39	12075	120	1.50	18	Hardwire	2275	Verify
DBP-03-16'-HFS	194 1/4	70 1/4	39	13800	120	1.80	18	Hardwire	2600	Verify
DBP-03-18'-HFS	218 1/4	70 1/4	39	15525	120	2.10	18	Hardwire	2925	Verify
DBP-03-20'-HFS	242 1/4	70 1/4	39	17250	120	2.40	18	Hardwire	3250	Verify
DBP-03-22'-HFS	266 1/4	70 1/4	39	18975	120	2.70	18	Hardwire	3575	Verify
DBP-03-24'-HFS	290 1/4	70 1/4	39	20700	120	3.00	18	Hardwire	3900	Verify
DBP-03-26'-HFS	314 1/4	70 1/4	39	22425	120	3.30	18	Hardwire	4225	Verify
DBP-03-28'-HFS	338 1/4	70 1/4	39	24150	120	3.60	18	Hardwire	4550	Verify
DBP-03-30'-HFS	362 1/4	70 1/4	39	25875	120	3.90	18	Hardwire	4875	Verify
DBP-03-32'-HFS	386 1/4	70 1/4	39	27600	120	4.20	18	Hardwire	5200	Verify

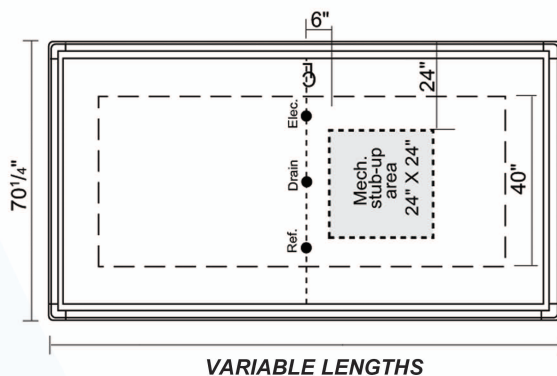

AMBIENT

MODEL	L*	D	H	VOLTS	AMPS	WT
DBP-03-8'-HFS	98 1/4	70 1/4	39	120	.60	1300
DBP-03-10'-HFS	122 1/4	70 1/4	39	120	.90	1625
DBP-03-12'-HFS	146 1/4	70 1/4	39	120	1.20	1950
DBP-03-14'-HFS	170 1/4	70 1/4	39	120	1.50	2275
DBP-03-16'-HFS	194 1/4	70 1/4	39	120	1.80	2600
DBP-03-18'-HFS	218 1/4	70 1/4	39	120	2.10	2925
DBP-03-20'-HFS	242 1/4	70 1/4	39	120	2.40	3250
DBP-03-22'-HFS	266 1/4	70 1/4	39	120	2.70	3575
DBP-03-24'-HFS	290 1/4	70 1/4	39	120	3.00	3900
DBP-03-26'-HFS	314 1/4	70 1/4	39	120	3.30	4225
DBP-03-28'-HFS	338 1/4	70 1/4	39	120	3.60	4550
DBP-03-30'-HFS	362 1/4	70 1/4	39	120	3.90	4875
DBP-03-32'-HFS	386 1/4	70 1/4	39	120	4.20	5200

Electrical & Plumbing locations

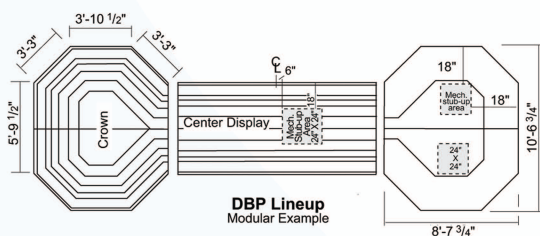

* LENGTHS INCLUDE END PANELS



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. For optimum performance, these merchandisers are designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet.

RPI in line with its current policy reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes improvements, additions, or replacements for equipment previously sold or shipped.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v1.13