

## MODEL # DBRP-03 - HFS

### SPECIFICATIONS

The Specialty Series DBRP-03 Island Produce Display offers flexible merchandising built to your produce department's requirements for center divider and product height. In addition, we can supply flat racks or multi level steps. Custom panels can be added to match your store's produce department design.



Available lengths:  98 1/4"  122 1/4"  146 1/4"  170 1/4"  194 1/4"  
 218 1/4"  242 1/4"  266 1/4"  290 1/4"  314 1/4"  
 338 1/4"  338 1/4"  362 1/4"  386 1/4"



Available depths:  70 1/4"

Available heights:  55 3/4"

### STANDARD FEATURES

- DOE 2017 Compliant
- Remote Refrigeration
- Low Center Divider - 8" Aluminum
- Green Epoxy Flat Wire Racks
- Painted Exterior
- Urethane-Coated Interior
- Plastic Product Dividers Every 24"
- Price Tag Wire with Chrome Posts
- 1" Black Vinyl Cart Bumper
- Insulated Interior Deck (Refrigerated)
- Package-Type Forced Air Coil (Refrigerated)
- Solar Digital Thermometer (Refrigerated)
- Expansion Valve Installed (Refrigerated)
- Please Reference Color Chart for Choice of Standard Hussmann Paint and Finish Options
- ETL Listed / ETL Sanitation Listed
- Environmentally Safe Refrigerant

### OPTIONAL FEATURES

- Green Epoxy Step Wire Racks with Plastic Product
- Dividers Every 24" (Racks Available in Black, Flat or Steps)
- Additional Product Dividers
- High Center Divider (24", 30", 38")
- Scale Hangers (Single/Double)
- Price Tag Molding
- Lighted Shelves
- Bag Racks
- Optional Hand Rail Heights
- Thermostat (Refrigerated)
- Water Outlets with Quick Disconnect (Refrigerated)
- Water Spray Hose (Refrigerated)
- Ledge Light
- Energy Efficient Fan Motors (Refrigerated)
- 5' Wide Case
- Custom Exterior Lengths and Body Panel Options (Consult Your Hussmann Sales Representative)

**NOTE: Does not hold processed produce or juice temperatures.**


CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)


220 ROUTE 70, MEDFORD, NJ 08055

## MODEL # DBRP-03 - HFS

## REMOTE - REFRIGERATED

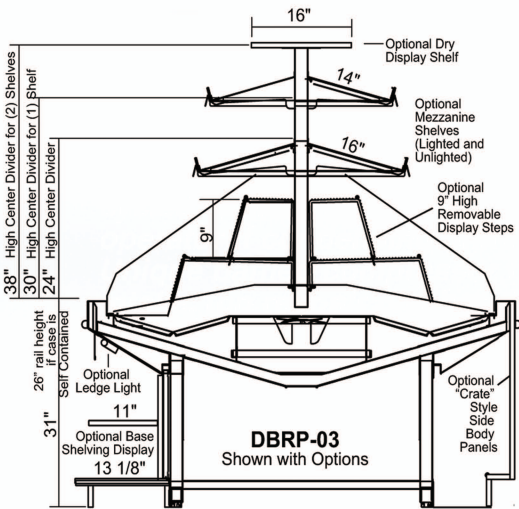

MODEL	L*	D	H	BTU / HR	VOLTS	AMPS	EVAP. TEMP °F	PLUG	WT	REFRIG.
DBRP-03-8'-HFS	98 1/4	70 1/4	55 3/4	6900	120	.60	18	Hardwire	1400	Verify
DBRP-03-10'-HFS	122 1/4	70 1/4	55 3/4	8625	120	.90	18	Hardwire	1750	Verify
DBRP-03-12'-HFS	146 1/4	70 1/4	55 3/4	10350	120	1.20	18	Hardwire	2100	Verify
DBRP-03-14'-HFS	170 1/4	70 1/4	55 3/4	12075	120	1.50	18	Hardwire	2450	Verify
DBRP-03-16'-HFS	194 1/4	70 1/4	55 3/4	13800	120	1.80	18	Hardwire	2800	Verify
DBRP-03-18'-HFS	218 1/4	70 1/4	55 3/4	15525	120	2.10	18	Hardwire	3150	Verify
DBRP-03-20'-HFS	242 1/4	70 1/4	55 3/4	17250	120	2.40	18	Hardwire	3500	Verify
DBRP-03-22'-HFS	266 1/4	70 1/4	55 3/4	18975	120	2.70	18	Hardwire	3850	Verify
DBRP-03-24'-HFS	290 1/4	70 1/4	55 3/4	20700	120	3.00	18	Hardwire	4200	Verify
DBRP-03-26'-HFS	314 1/4	70 1/4	55 3/4	22425	120	3.30	18	Hardwire	4550	Verify
DBRP-03-28'-HFS	338 1/4	70 1/4	55 3/4	24150	120	3.60	18	Hardwire	4900	Verify
DBRP-03-30'-HFS	362 1/4	70 1/4	55 3/4	25875	120	3.90	18	Hardwire	5250	Verify
DBRP-03-32'-HFS	386 1/4	70 1/4	55 3/4	27600	120	4.20	18	Hardwire	5600	Verify

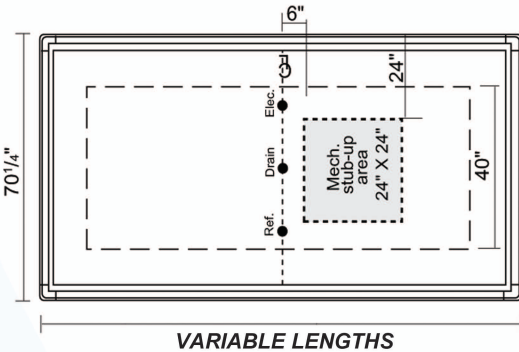


### Electrical & Plumbing locations

## AMBIENT

MODEL	L*	D	H	VOLTS	AMPS	WT
DBRP-03-8'-HFS	98 1/4	70 1/4	55 3/4	120	.60	1400
DBRP-03-10'-HFS	122 1/4	70 1/4	55 3/4	120	.90	1750
DBRP-03-12'-HFS	146 1/4	70 1/4	55 3/4	120	1.20	2100
DBRP-03-14'-HFS	170 1/4	70 1/4	55 3/4	120	1.50	2450
DBRP-03-16'-HFS	194 1/4	70 1/4	55 3/4	120	1.80	2800
DBRP-03-18'-HFS	218 1/4	70 1/4	55 3/4	120	2.10	3150
DBRP-03-20'-HFS	242 1/4	70 1/4	55 3/4	120	2.40	3500
DBRP-03-22'-HFS	266 1/4	70 1/4	55 3/4	120	2.70	3850
DBRP-03-24'-HFS	290 1/4	70 1/4	55 3/4	120	3.00	4200
DBRP-03-26'-HFS	314 1/4	70 1/4	55 3/4	120	3.30	4550
DBRP-03-28'-HFS	338 1/4	70 1/4	55 3/4	120	3.60	4900
DBRP-03-30'-HFS	362 1/4	70 1/4	55 3/4	120	3.90	5250
DBRP-03-32'-HFS	386 1/4	70 1/4	55 3/4	120	4.20	5600

\* LENGTHS INCLUDE END PANELS

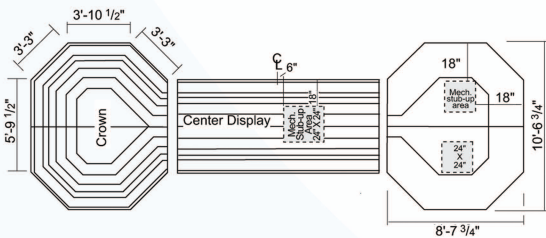

Conforms to UL Standard 471,  
and NSF Standard 7; Certified  
To CSA Standard C22.2 No.120



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

- For optimum performance, these merchandisers are designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet.

RPI in line with its current policy reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes improvements, additions, or replacements for equipment previously sold or shipped.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055