

MODEL # IM-FR - HFS

SPECIFICATIONS

The Isla Series IM-FR Module is great for a multitude of genres - lettuce salads, bean salads, potato or pasta salads, and even an olive bar. Clean, smooth counter top design makes wiping and cleaning a breeze. Available in End, Center, and Inline configurations.



Available lengths: End (E) Center (C) Inline (I)

E: 60"

C: 36" 48" 60" 72" 96" 120" 144"

I: 36" 48" 60" 72" 96" 120" 144"

Available depths: 32" 35 1/4" (E/I)

Available heights: 50" 58"




STANDARD FEATURES

- DOE 2017 Compliant
- Remote Refrigeration
- Stainless Steel Counter Top
- Black Powder Coated Sneeze Guard Post Assembly
- 1/4" Clear Tempered Glass Sneeze Guard & T5 Lighting (Wrap-Around on End Unit, Straight on Center Units)
- Painted exterior
- Air Over Refrigeration System
- Electronic ballast
- Thermostat & Suction Stop Solenoid
- Please Reference Color Chart for Choice of Standard Hussmann Paint and Finish Options
- ETL Listed / ETL Sanitation Listed
- Environmentally Safe Refrigerant

OPTIONAL FEATURES


- Energy Efficient LED Canopy Lights
- Solid Surface Counter Top
- Liquid Line Shut-Off Hand Valve
- End Panels
 - Flush (Inline) Solid Autobrite - Interior
- End Panel with Wrap-Around Bumper (inline)
 - Solid Autobrite - Interior
- Solid Transition Panel (Between Dissimilar Temp Modules)
- Counter Transition Panel
- Tempered Glass End Wing or Divider
- Special Interior and Exterior Finishes* (Consult Your Hussmann Sales Representative)

MODEL # IM-FR - HFS

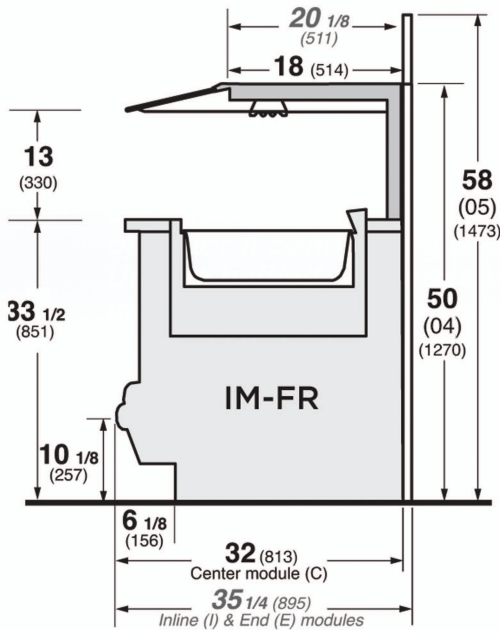


Module Type	Number of Wells (12" x 20")
5' End	4
3' Center/In-Line	2
4' Center/In-Line	3
5' Center/In-Line	4
6' Center/In-Line	5
8' Center/In-Line	7
10' Center/In-Line	8
12' Center/In-Line	10

Electrical & Plumbing locations

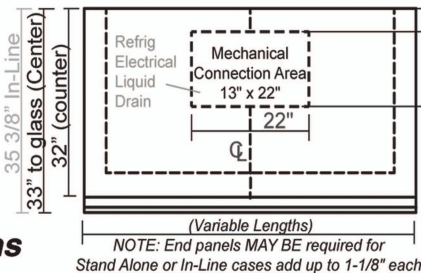

IM-FR CENTER / IN-LINE MODULE

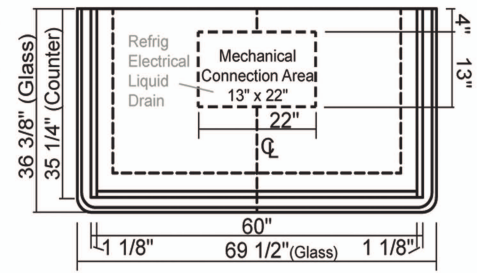

IM-FR END MODULE

REMOTE - REFRIGERATED (CENTER)

MODEL	L	D	H	BTU / HR	VOLT	AMP	EVAP. TEMP °F	PLUG	WT	REFRIG.
IM-04/05-C3-FR-HFS	36	32	50/58	1500	120	1.6	20	Hardwire	800	Verify
IM-04/05-C4-FR-HFS	48	32	50/58	2250	120	2.2	20	Hardwire	1000	Verify
IM-04/05-C5-FR-HFS	60	32	50/58	3000	120	2.2	20	Hardwire	1100	Verify
IM-04/05-C6-FR-HFS	72	32	50/58	3750	120	2.5	20	Hardwire	1200	Verify
IM-04/05-C8-FR-HFS	96	32	50/58	5250	120	5.4	20	Hardwire	1300	Verify
IM-04/05-C10-FR-HFS	120	32	50/58	6000	120	3.7	20	Hardwire	1400	Verify
IM-04/05-C12-FR-HFS	144	32	50/58	7500	120	5.6	20	Hardwire	1600	Verify

REMOTE - REFRIGERATED (IN-LINE)

MODEL	L	D	H	BTU / HR	VOLT	AMP	EVAP. TEMP °F	PLUG	WT	REFRIG.
IM-04/05-I3-FR-HFS	36	35 1/4	50/58	1500	120	1.6	20	Hardwire	800	Verify
IM-04/05-I4-FR-HFS	48	35 1/4	50/58	2250	120	2.2	20	Hardwire	1000	Verify
IM-04/05-I5-FR-HFS	60	35 1/4	50/58	3000	120	2.2	20	Hardwire	1100	Verify
IM-04/05-I6-FR-HFS	72	35 1/4	50/58	3750	120	2.5	20	Hardwire	1200	Verify
IM-04/05-I8-FR-HFS	96	35 1/4	50/58	5250	120	5.4	20	Hardwire	1300	Verify
IM-04/05-I10-FR-HFS	120	35 1/4	50/58	6000	120	3.7	20	Hardwire	1400	Verify
IM-04/05-I12-FR-HFS	144	35 1/4	50/58	7500	120	5.6	20	Hardwire	1600	Verify

REMOTE - REFRIGERATED (END)

MODEL	L	D	H	BTU / HR	VOLT	AMP	EVAP. TEMP °F	PLUG	WT	REFRIG.
IM04/05-E5-FR-HFS	60	35 1/4	50/58	3000	120	2.2	20	Hardwire	1100	Verify



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120



Hussmann Heated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. For optimum performance, these models are designed for use in air-conditioned stores where temperature and humidity are maintained at 75°F and 55% R.H. Locate case away from direct sunlight, rapid air currents and extreme temperature changes. Case is designed for holding pre-chilled product only.

RPI in line with its current policy reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes improvements, additions, or replacements for equipment previously sold or shipped.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055