

MODEL # IM-FS - HFS

SPECIFICATIONS

The Isla Series IM-FS Module is a merchandiser designed for serving soup. The module features 11 quart soup wells, auto water fill with adjustable level and shut-off valve, cup dispenser, napkin dispenser, Lid holder, and individually controlled heated steam wells. Available in End, Center and Inline configurations.



Available lengths: End (E) Center (C) Inline (I)

E: 60"

C: 36" 48" 60" 72" 96"

I: 36" 48" 60" 72" 96"

Available depths: 32" 35 1/4" (E/I)

Available heights: 50" 58"




STANDARD FEATURES

- DOE 2017 Compliant
- 11 Quart Soup Wells
- Individual Soup Well Controls Behind Hidden Panel
- Auto-Fill Water with Adjustable Level & Shut-Off Valve
- Stainless steel counter top
- Black Powder Coated Sneeze Guard Post Assembly
- 1/4" Clear Tempered Glass Sneeze Guard & T5 Lighting (Wrap-Around On End Unit, Straight On Center Units)
- Painted Exterior
- Electronic Ballast
- Please Reference Color Chart for Choice of Standard Hussmann Paint and Finish Options
- ETL Listed / ETL Sanitation Listed

OPTIONAL FEATURES

- Energy Efficient LED Canopy Lights
- Cup Dispenser - Built In
- Lid Holder
- Napkin Dispense
- Utensil Container
- Solid Surface Counter Top
- End Panels
 - Flush (Inline) Solid Autobrite - Interior
- End panel with Wrap-Around Bumper (Inline)
 - Solid Autobrite - Interior
- Tempered Glass End Wing or Divider
- Counter Transition Panel
- Special Interior and Exterior Finishes*
(Consult Your Hussmann Sales Representative)

MODEL # IM-FS - HFS

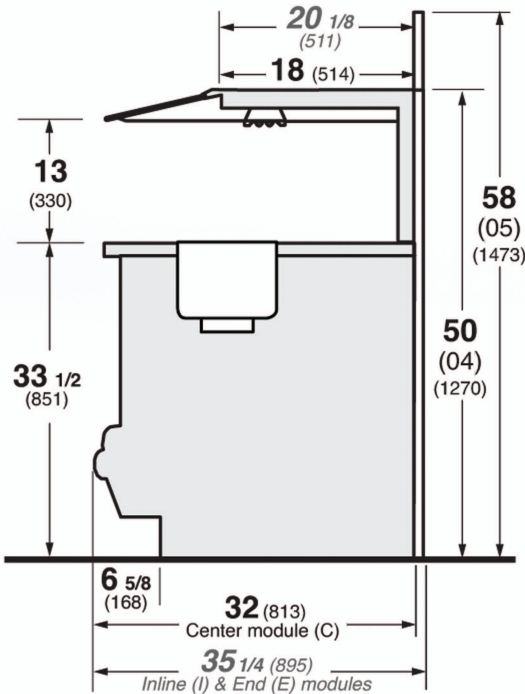

HOT (CENTER)

MODEL	L	D	H	VOLT	AMP	PLUG	WT
IM-04/05-C3-FS-HFS	36	32	50/58	240/1	5.0	5-15P	800
IM-04/05-C4-FS-HFS	48	32	50/58	240/1	7.5	5-15P	1000
IM-04/05-C5-FS-HFS	60	32	50/58	240/1	10.0	5-15P	1100
IM-04/05-C6-FS-HFS	72	32	50/58	240/1	12.5	5-15P	1200
IM-04/05-C8-FS-HFS	96	32	50/58	240/1	15.0	5-15P	1400

HOT (IN-LINE)


MODEL	L	D	H	VOLT	AMP	PLUG	WT
IM-04/05-I3-FS-HFS	36	35 1/4	50/58	240/1	5.0	5-15P	800
IM-04/05-I4-FS-HFS	48	35 1/4	50/58	240/1	7.5	5-15P	1000
IM-04/05-I5-FS-HFS	60	35 1/4	50/58	240/1	10.0	5-15P	1100
IM-04/05-I6-FS-HFS	72	35 1/4	50/58	240/1	12.5	5-15P	1200
IM-04/05-I8-FS-HFS	96	35 1/4	50/58	240/1	15.0	5-15P	1400

HOT (END)

MODEL	L	D	H	VOLT	AMP	PLUG	WT
IM-04/05-E5-FS-HFS	60	35 1/4	50/58	240/1	10.0	5-15P	1100

IM-FS Module Type	11 Quart Soup Well Qty.
5' End	3
3' Center	2
4' Center	3
5' Center	4
6' Center	5
8' Center	7

IM-C5-FS Center Module / IM-I5-FS In-line Module

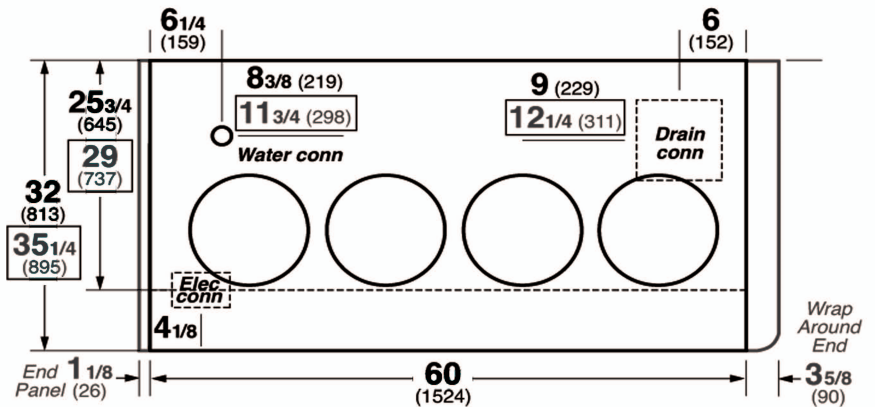

Conforms to UL Standard 197, and NSF Standard 4; Certified To CSA Standard C22.2 No. 109



Hussmann Heated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. For optimum performance, these models are designed for use in air-conditioned stores where temperature and humidity are maintained at 75°F and 55% R.H. Locate case away from direct sunlight, rapid air currents and extreme temperature changes.

RPI in line with its current policy reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes improvements, additions, or replacements for equipment previously sold or shipped.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055