

MODEL # IM-R - HFS

SPECIFICATIONS

Isla Series features an “all-in-one-area” way to display refrigerated, dry and hot products, by offering a unique “design-your-own island” merchandiser configuration. A variety of modules and flexible layouts that include 3-sided, 2-sided, in-line and stand-alone cases are available to accommodate the ideal footprint.

Available in End, Center, and Inline configurations.



Available lengths: End (E) Center (C) Inline (I)

E: ☐ 67 1/4"

C: ☐ 36" ☐ 48" ☐ 60" ☐ 72" ☐ 96" ☐ 120" ☐ 144"

I: ☐ 36" ☐ 48" ☐ 60" ☐ 72" ☐ 96" ☐ 120" ☐ 144"

Available depths: ☐ 33 5/8" (C) ☐ 35 3/8" (I/E)

Available heights: ☐ 50" ☐ 58"



STANDARD FEATURES


- DOE 2017 Compliant
- Remote Refrigeration
- Painted Exterior
- Module Coil System - 5 Year Warranty
- Electronic Ballast
- Thermostat & Sucktion Stop Solehoid
- Solar Digital Thermometer
- ETL Listed / ETL Sanitation Listed
- Please Reference Color Chart for Choice of Standard Hussmann Paint and Finish Options

OPTIONAL FEATURES


- ☐ Insulated Glass Vision End Panels
- ☐ Solid End Panels
- ☐ Adjustable Shelves with Tag Molding and Rear Product Stop
- ☐ Plex Product Stop
- ☐ Peg Bar Shelving
- ☐ Energy Efficient LED Shelf Lighting
- ☐ Liquid Line Hand Valve
- ☐ End Panels
 - ☐ Flush (Inline) ☐ Solid ☐ View ☐ Autobrite - Interior
- ☐ End Panel with Wrap-Around Bumper (Inline)
 - ☐ Solid ☐ View ☐ Autobrite - Interior
- ☐ Solid Transition Panel
(Between Dissimilar Temp Modules)
- ☐ Counter Transition Panel
(Partial End Panel - when adjacent to food-counter modules)
- ☐ Finished Exterior Back Cover (Inline)
 - ☐ Painted ☐ Stainless Steel
- ☐ Special Interior and Exterior Finishes*
(Consult your Hussmann Sales Representative)

MODEL # IM-R - HFS

IM-04-R Refrigerated Self-Service Module

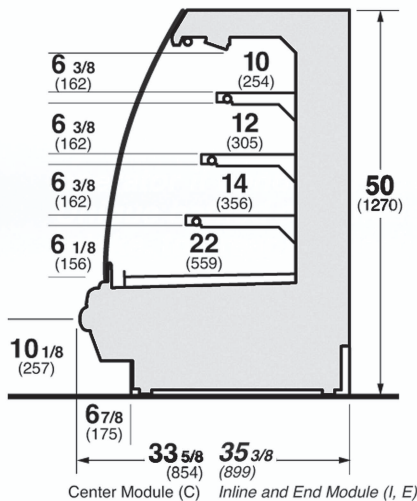

IM-05-R Refrigerated Self-Service Module

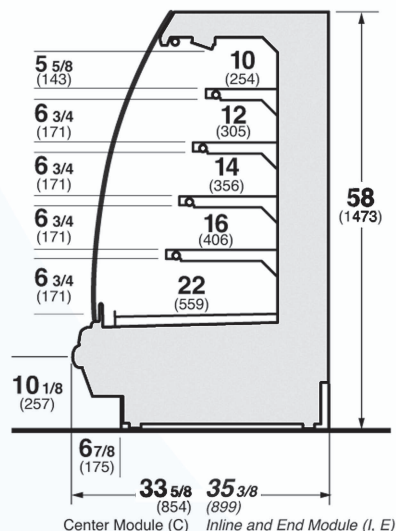

REMOTE - REFRIGERATED (CENTER)


MODEL	L	D	H	BTU / HR	VOLT	AMP	EVAP. TEMP °F	PLUG	WT	REFRIG.
IM-04/05-C3-R-HFS	36	33 5/8	50/58	2588	120	1.4	24	Hardwire	800	Verify
IM-04/05-C4-R-HFS	48	33 5/8	50/58	3450	120	1.9	24	Hardwire	1000	Verify
IM-04/05-C5-R-HFS	60	33 5/8	50/58	4313	120	2.3	24	Hardwire	1100	Verify
IM-04/05-C6-R-HFS	72	33 5/8	50/58	5175	120	2.8	24	Hardwire	1200	Verify
IM-04/05-C8-R-HFS	96	33 5/8	50/58	6900	120	3.7	24	Hardwire	1300	Verify
IM-04/05-C10-R-HFS	120	33 5/8	50/58	8625	120	4.6	24	Hardwire	1400	Verify
IM-04/05-C12-R-HFS	144	33 5/8	50/58	10350	120	5.6	24	Hardwire	1600	Verify

REMOTE - REFRIGERATED (IN-LINE)

MODEL	L	D	H	BTU / HR	VOLT	AMP	EVAP. TEMP °F	PLUG	WT	REFRIG.
IM-04/05-I3-R-HFS	36	35 3/8	50/58	4013	120	1.4	24	Hardwire	800	Verify
IM-04/05-I4-R-HFS	48	35 3/8	50/58	5351	120	1.9	24	Hardwire	1000	Verify
IM-04/05-I5-R-HFS	60	35 3/8	50/58	6689	120	2.3	24	Hardwire	1100	Verify
IM-04/05-I6-R-HFS	72	35 3/8	50/58	8027	120	2.8	24	Hardwire	1200	Verify
IM-04/05-I8-R-HFS	96	35 3/8	50/58	10703	120	3.7	24	Hardwire	1300	Verify
IM-04/05-I10-R-HFS	120	35 3/8	50/58	13378	120	4.6	24	Hardwire	1400	Verify
IM-04/05-I12-R-HFS	144	35 3/8	50/58	16054	120	5.6	24	Hardwire	1600	Verify

REMOTE - REFRIGERATED (END)

MODEL	L	D	H	BTU / HR	VOLT	AMP	EVAP. TEMP °F	PLUG	WT	REFRIG.
IM-04/05-E5-R-HFS	67 1/4	35 3/8	50/58	6689	120	2.3	24	Hardwire	1100	Verify

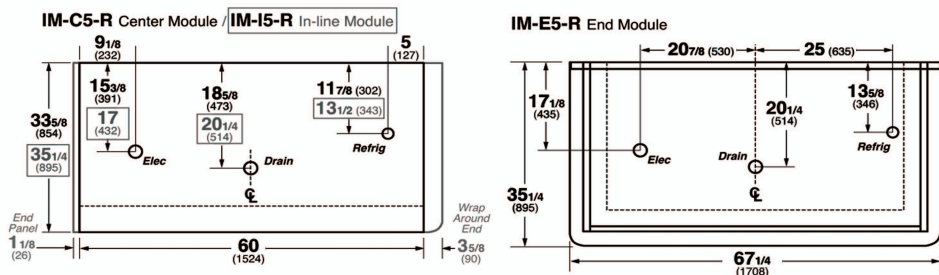

Electrical & Plumbing locations



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120



Hussmann Heated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. For optimum performance, these models are designed for use in air-conditioned stores where temperature and humidity are maintained at 75°F and 55% R.H. Locate case away from direct sunlight, rapid air currents and extreme temperature changes. Case is designed for holding pre-chilled product only.

RPI in line with its current policy reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes improvements, additions, or replacements for equipment previously sold or shipped.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v1.13