

MODEL # Q4-SS - HFS

SPECIFICATIONS

The Q Series Q4-SS features a new 0° to 15° tilt shelf system, and allows for multiple rows, optional step displays, and other flexible configurations. Solid surface front ledge and top add an elegant touch, and the LED lighting provides excellent product illumination.



Available lengths: ☐ 50 1/4" ☐ 62 1/4" ☐ 74 1/4" ☐ 98 1/4" ☐ 122 1/4" ☐ 146 1/4"

Available depths: ☐ 43 7/8"

Available heights: ☐ 54 3/4"

Optional wedges: ☐ 45° (Outside Only) ☐ 90° (Outside Only)




STANDARD FEATURES

- DOE 2017 Compliant
- Remote-Refrigeration
- 1/2" Plexiglass Front
- Hand Removable Black Interior Panels
- Energy Efficient Fans
- Black Thermoplastic Top and Front Ledge
- Snap-On Stainless Steel Lower Rear Panel
- Snap-On Painted Front Panel
- Adjustable Stainless Steel Legs
- Black Vinyl Cart Bumper
- Please Reference Color Chart for Choice of Standard Hussmann Paint and Finish Options
- ETL Listed / ETL Sanitation Listed
- Environmentally Safe Refrigerant

OPTIONAL FEATURES

- ☐ Corian®, Granite or Other Solid Surface Front and/or Top Ledge (NSF approved material)
- ☐ 12", 18" and 22" Adjustable Shelves (Level and 15° Tilt)
- ☐ Coil Corrosion Protective Coating
- ☐ T-5 Case Lighting for Shelves and Canopy
- ☐ Energy Efficient LED Case Lighting for Shelves and Canopy
- ☐ Stainless Steel Interior
- ☐ View or Solid End Panels
- ☐ Mirror Bright Interior End Panels
- ☐ Black 2 Step Display
- ☐ Stainless Steel Pedestals
- ☐ Liquid Line Shut-Off Hand Valve
- ☐ Ledge Lighting
- ☐ Thermostat (Remote)
- ☐ Special Interior and Exterior Finishes
- ☐ Custom Trim and Decor
- ☐ Custom Lengths and Options*
- ☐ Special Interior and Exterior Finishes*
(Consult your Hussmann Sales Representative)


MODEL # Q4-SS - HFS

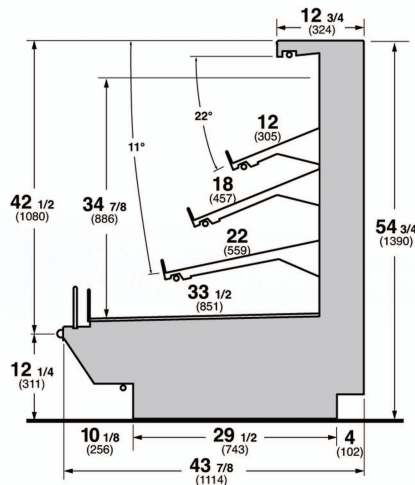


REMOTE - REFRIGERATED

MODEL	L*	D	H	BTU/HR	VOLTS	AMPS	EVAP. TEMP °F	PLUG	WT	REFRIG.
Q4-SS 4'-HFS	50 1/4	43 7/8	54 3/4	4164	120	15	20	Hardwire	900	Verify
Q4-SS 5'-HFS	62 1/4	43 7/8	54 3/4	5205	120	15	20	Hardwire	1000	Verify
Q4-SS 6'-HFS	74 1/4	43 7/8	54 3/4	6246	120	15	20	Hardwire	1100	Verify
Q4-SS 8'-HFS	98 1/4	43 7/8	54 3/4	8328	120	15	20	Hardwire	1300	Verify
Q4-SS 10'-HFS	122 1/4	43 7/8	54 3/4	10410	120	15	20	Hardwire	1400	Verify
Q4-SS 12'-HFS	146 1/4	43 7/8	54 3/4	12492	120	15	20	Hardwire	1500	Verify


* LENGTHS INCLUDE END PANELS

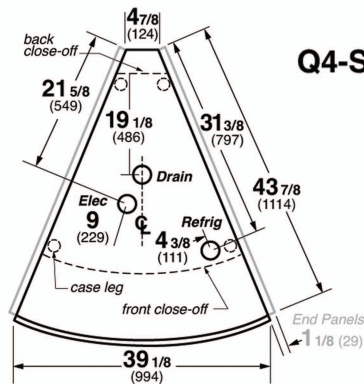


Q4-SS 45° O/S wedge

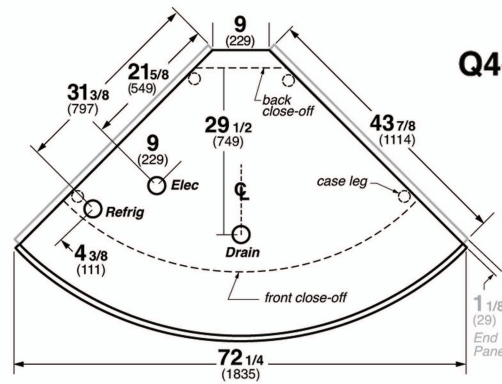

Q4-SS 90° O/S wedge

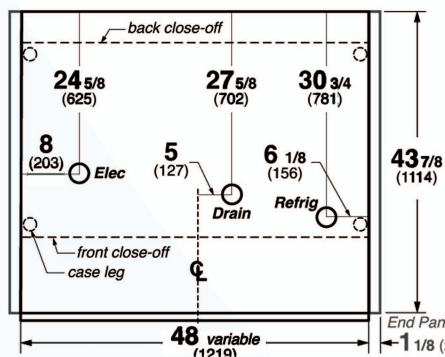

Electrical & Plumbing locations

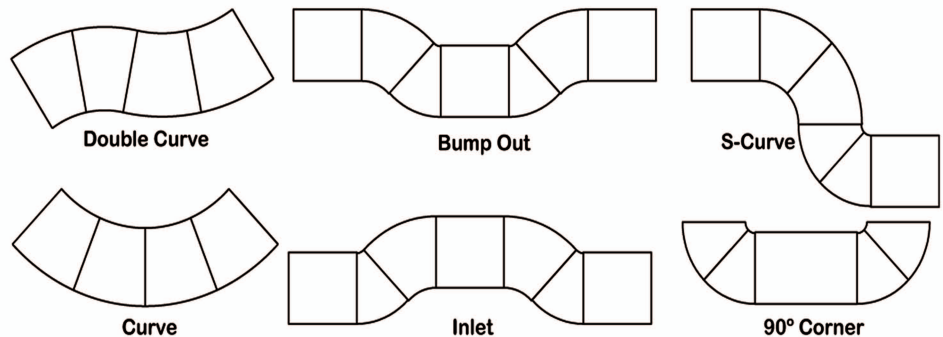

Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. For optimum performance, these models are designed for use in air-conditioned stores where temperature and humidity are maintained at 75°F and 55% R.H. Locate case away from direct sunlight, rapid air currents and extreme temperature changes. Case is designed for holding pre-chilled product only.

RPI in line with its current policy reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes improvements, additions, or replacements for equipment previously sold or shipped.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055