

MODEL # SHM - HFS

SPECIFICATIONS

The Specialty Series SHM places maximum attention on merchandising. A softer, rounder design featuring a standard white base with black bumper. All SHM merchandisers have the same contour and line up together to create extended product displays.



Available lengths: 36" 48"

Available depths: 30 5/8"

Available heights: 42 7/8"



STANDARD FEATURES


- DOE 2017 Compliant
- Self-Contained Refrigeration
- Remote Refrigeration
- Compact Size Offering Maximum Display Area in Minimum Floor Space
- Large Front Glass Panel for Enhanced Product Visibility
- Easy Clean Interior
- CFC-Free Foam Insulation
- Factory Installed Power Cord (Self-Contained Units Only)
- Air Curtain Design with Honeycomb Air Discharge
- Automatic Defrost
- Electronic Controls with Digital Display
- Electric Condensate Evaporator Pan (Removable No Floor Drain Required, Optional for Remote Units)
- Slide-Out Condensing Unit for Easy Serviceability
- Rear Air Intake / Discharge (SHM-4 Model Only)
- Adjustable Temperature Control
- UL Listed & UL ANSI / NSF 7 certified
- Environmentally Safe Refrigerant

OPTIONAL FEATURES

- Choice of Exterior Colors
- Wraparound Bumper
- Wire Racks and Dividers
- Light Bar Kit
- Leg Kit
- Caster Kit
- Stainless Steel Exterior
- Night Cover
- Skirt Kit (Use With Leg Kit)
- Plex Product Stop 2" High for Lower Step Only
- Remote Application

MODEL # SHM - HFS

SELF - CONTAINED

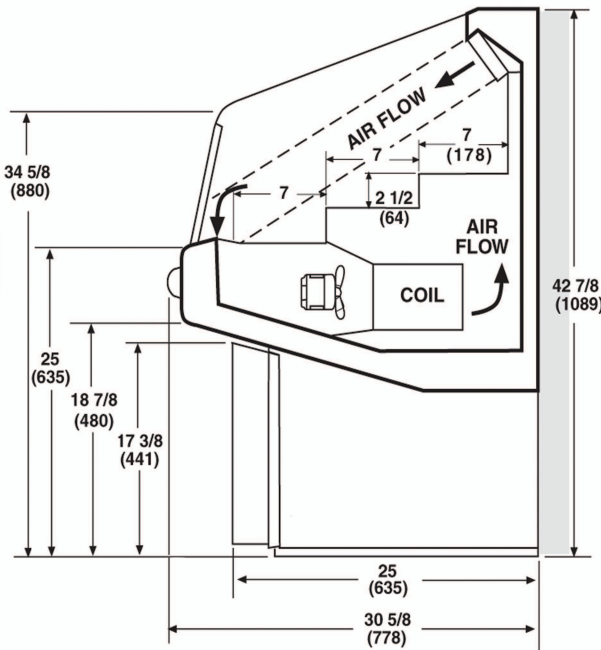


MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SHM-3-HFS	36"	30 5/8"	42 7/8"	1/3	115	15	5-15P	250	404A
SHM-4-HFS	48"	30 5/8"	42 7/8"	1/2	115	15	5-15P	350	134A

REMOTE - REFRIGERATED

MODEL	L	D	H	BTU / HR	VOLTS	AMPS	EVAP. TEMP °F	PLUG	WT	REFRIG.
SHM-3-HFS	36"	30 5/8"	42 7/8"	2300	115	15	20	Hardwire	205	Verify
SHM-4-HFS	48"	30 5/8"	42 7/8"	3535	115	15	20	Hardwire	295	Verify

For all models, refrigeration load and AC load obtained at 20° F evaporation temperature and 110° F condensing temperature

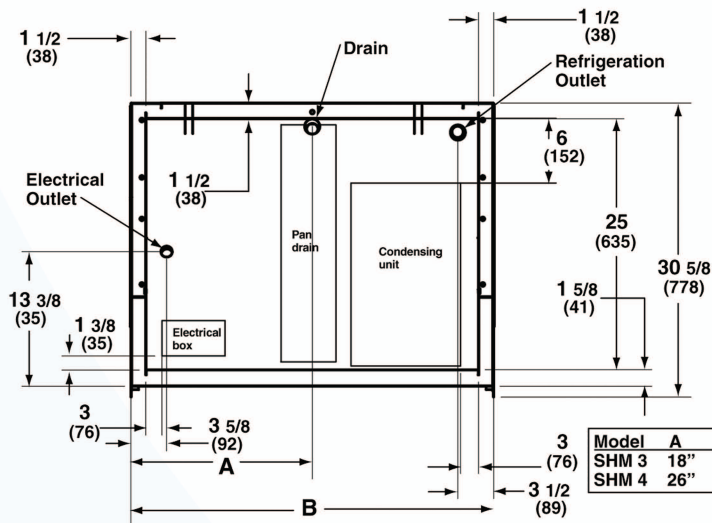

Electrical & Plumbing locations



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No. 120



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

- For optimum performance, these merchandisers are designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet.

RPI in line with its current policy reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes improvements, additions, or replacements for equipment previously sold or shipped.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055