

MODEL # SM - MEDIUM AND LOW TEMPERATURE, OPEN GLASS TOP - HFS

SPECIFICATIONS

The Spot Merchandiser Series SM maximizes product facings in minimum floor space. Optional custom color graphics create eye-catching displays for personalization or special product promotions. SM model 110 is designed for merchandising six 12" diameter pizza facings.



Available lengths: ☐ 45" ☐ 41"

Available depths: ☐ 24 1/2" ☐ 29"

Available heights: ☐ 34 1/2" ☐ 34"






STANDARD FEATURES

- DOE 2017 Compliant
- Self-Contained Refrigeration
- Foamed-In-Place CFC-Free Polyurethane Insulation for Maximum Refrigeration Efficiency
- Thermostatic Controls Providing Continuous Range of Temperature Settings (SM Model +10 °F to +40 °F)
- UL Listed & UL ANSI / NSF 7 Certified
- Environmentally Safe Refrigerant

OPTIONAL FEATURES

- ☐ Choice of Exterior Colors
- ☐ Adjustable Bottom Rack-Stainless Steel.
- ☐ Elevates Bottom to Three Different Levels for Minimum Product Display or for Fragile Packages That Should Not Be Stacked
- ☐ Frost Accumulator-Aluminum Collar Which Accumulates Frost. Lifts Out for Defrost Without Moving Products. Protects Evaporator
- ☐ Sign Holders
- ☐ Hanging Baskets
- ☐ Bumpers
- ☐ Personalized Graphics


MODEL # SM - MEDIUM AND LOW TEMPERATURE, OPEN GLASS TOP - HFS

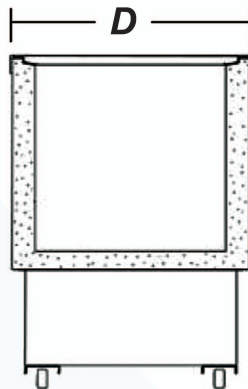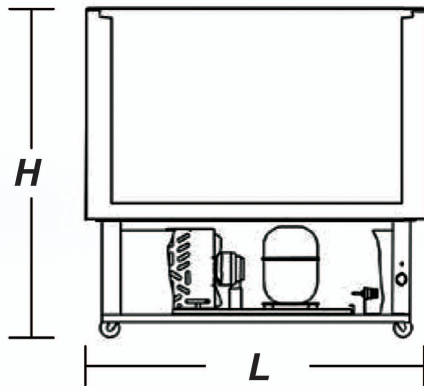

SELF-CONTAINED

MODEL	L	D	H	HP	VOLTS	AMPS	PLUG	WT	REFRIG.
SM-115-HFS	45	24 1/2	34 1/2	60/1	115	4.5	5-15P	178	404A
SM-110-HFS	41	29	34	60/1	115	6.5	5-15P	162	404A

Note: Please use Hussmann's technical data sheets to get precise dimensions for all store layout purposes.

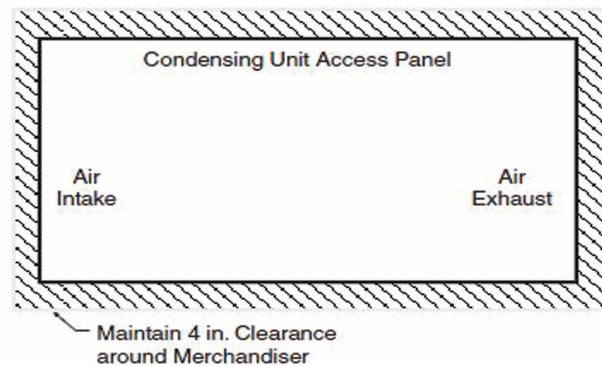

Electrical & Plumbing locations



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. For optimum performance, these merchandisers are designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet.

RPI in line with its current policy reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes improvements, additions, or replacements for equipment previously sold or shipped.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055