

MODEL # SWINS48-24M

SPECIFICATIONS

The SWIN Mini Series is a grab and go style refrigerator. The self-contained refrigeration system includes digital controls allowing unit to engage in minimal defrost cycles. Unique baffled compressor housing for front air intake, top rear air discharge reducing noise levels plus zero clearance from wall installation. Unit comes standard with 2 shelves.

Available lengths: 24"

Available depths: 30"

Available heights: 55"



STANDARD FEATURES

- DOE 2017 Compliant
- Self-Contained Refrigeration
- Squared Top Canopy
- Integrated Construction
- Black Interior End
- Black Exterior Finish
- Black Perforated Interior Back Panel
- LED Top Canopy Light
- (2) Adjustable Deep Shelves (Black)
- Removable Black Deck Pan with Hemmed Edge to Contain Spills
- Electronic Digital Temperature Control and Defrost Termination
- Digital Temperature Display
- Unique Internal Baffle Design for Compressor Noise Reduction
- Front Air Intake with Top Rear Air Discharge for Zero Clearance
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Conforms to NSF STD 7 Type II Refrigeration
- Environmentally Safe Refrigerant
- Side Vision Panels
- Condensate Evaporator System
- Thermometer
- 1 Year Parts and Labor Warranty
- 5 Year Compressor Warranty


OPTIONAL FEATURES

- Low Profile Casters
- Pull Down Night Shade
- Exterior Laminate Finishes
 - 949-58 White
 - 9244-58 Classic White
 - 459-58 Brite White
 - 7197-58 Dover White
 - 920-58 Almond
 - 927-58 Folkstone
 - 9243-58 Zen Grey
 - 9242-58 Gull Grey
 - 961-58 Fog
 - 756-58 Natural Maple
 - 86992-58 Hard Rock Maple
 - 7012-58 Amber Maple
 - 9237-58 Sand Maple
 - 9238-58 Chelsea Maple
 - 5904-43 Wild Cherry
 - 9240-58 Cherry Hardwood
 - 9236-43 (V4) Noble Mahogany
 - 9300-58 Grey Grafix
 - 8955-43 Cinnamon Cherry
 - 9288-43 (V4) Kona
 - 9374-43 Cocoa Oak

MODEL # SWINS48-24M

SELF - CONTAINED

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT
SWINS48-24M	24	30	55	1/2	115	12.8	5-20P	285

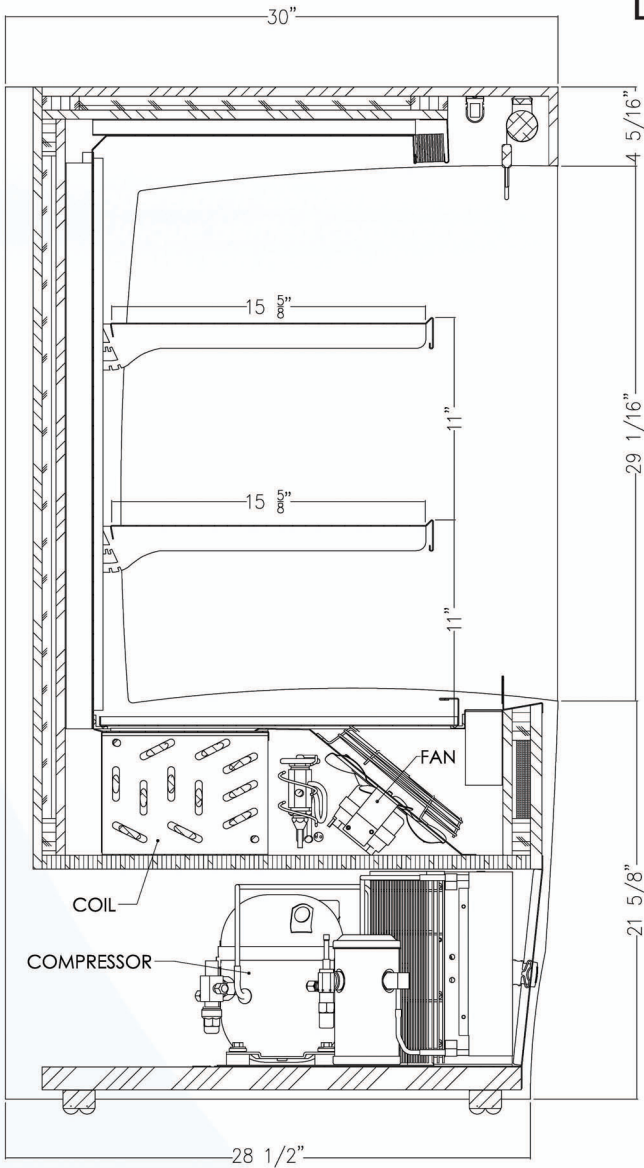

RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
 2. The SWINS48-24M merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.
- RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.*

CALL TOLL FREE: 800-525-3692 (609-714-2330)
 FAX: 609-714-2331 www.rpiindustries.com
 220 ROUTE 70, MEDFORD, NJ 08055

