

QUICK-TRACK II

OLYMPUS-V-MINI

SHIPMENT IN 10 DAYS OR LESS!



Our most Popular Air Screen!

TOP SELLING FEATURES

- Top canopy with LED light
- Standard grade laminate exterior
- Black interior end
- (2) black adjustable deep shelves
- Removeable black deck pan to contain spills
- Unique design allows front air intake/top rear air discharge within 32" - no rear spacer required!
- Smart-sensor alerts operator when unit requires cleaning.
- NFS Type II & DOE 2017 compliant

MODEL

SCAS-V-36R-55

Laminate Options 949-58 White 9244-58 Classic White 459-58 Brite White 7197-58 Dover White 920-58 Almond 927-58 Folkstone 9242-58 Gull Grey 961-58 Fog 756-58 Natural Maple 86992-58 Hard Rock Maple 7012-58 Amber Maple 9237-58 Sand Maple 909-58 Black 9238-58 Chelsea Maple 5904-43 Wild Cherry 9240-58 Cherry Hardwood 9236-43 (V4) Noble Mahagony 9300-58 Grey Grafix 8955-43 Cinnamon Cherry 9288-43 (V4) Kona

Quantities limited and available on a first come, first serve basis

Contact RPI customer service for additional information



MODEL # SCAS-V-36R-55

SPECIFICATIONS

The Olympus Mini Air Screen SCAS-V-36R-55 Series is a grab and go style refrigerator. The self-contained refrigeration system includes digital controls allowing unit to engage in minimal defrost cycles. Unique baffled compressor housing for front air intake, top rear air discharge reducing noise levels plus zero clearance from wall installation. Unit comes standard with 2 shelves.

Available lengths:	□ 24"	
Available depths:	☐ 30"	
Available heights:	☐ 55"	



STANDARD FEATURES

- DOE 2017 Compliant
- Self-Contained Refrigeration
- Squared Top Canopy
- Integrated Construction
- Black Interior End
- Standard Grade Laminate Exterior Finish
- Black Louvered Air Grill
- Black Perforated Interior Back Panel
- LED Top Canopy Light
- (2) Adjustable Deep Shelves (Black)
- Removable Black Deck Pan with Hemmed Edge to Contain Spills
- Electronic Digital Temperature Control and Defrost Termination
- Digital Temperature Display
- Unique Internal Baffle Design for Compressor Noise Reduction
- Front Air Intake with Top Rear Air Discharge for Zero Clearance
- ■8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Conforms to NSF STD 7 Type II Refrigeration
- Environmentally Safe Refrigerant
- Side Vision Panels
- Condensate Evaporator System
- **■** Thermometer
- ■1 Year Parts and Labor Warranty
- 5 Year Compressor Warranty

OPTIONAL FEATURES

- ☐ Low Profile Casters
- □ Pull Down Night Shade
- □ Exterior Finish Stainless Steel
- □ Stainless Steel Front Air Grill






MODEL # SCAS-V-36R-55

PROJECT:

TOLL FREE: 800-525-3692

SELF - CONTAINED

	MODEL	L	D	Н	HP	VOLT	AMP	PLUG	WT
ſ	SCAS-V-36R-55	24	30	55	1/2	115	12.8	5-20P	285

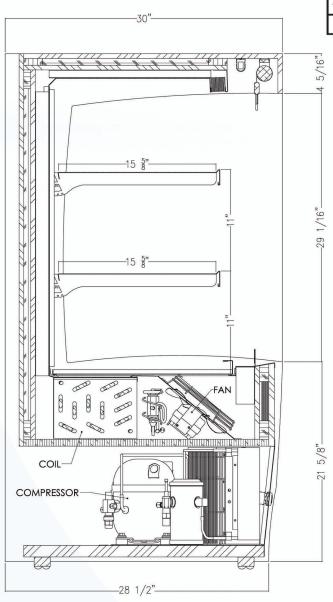









RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

- 1. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
- 2. The SCAS-V-36R-55 merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.



