

MODEL # VIAS1-27-R-SL-SC-FD SNACKEE

SPECIFICATIONS

The Vienna Series VIAS1-27-R-SL-SC-FD Snackee, self-service Grab and go style refrigerated display with slanted glass profile. Features include 1 glass shelf with LED lighting, 2 front flip-up doors, and a rear mirrored hinged door. Available as a drop-in unit or with slide-in base, rear ventilation, and with all stainless steel construction.

- Available lengths: 23 5/8"
 Available depths: 28"
 Available heights: 27 5/8" (ABOVE COUNTER)



STANDARD FEATURES

- Slanted style display
- Stainless steel exterior and interior
- Drop-In frame with flange *
- Rear breathing
- Glass side panels
- (1) Glass shelf
- (2) Front Flip-Up Access Doors
- Hinged rear door, mirror polished on interior side
- Energy efficient LED lights
- Programmable digital display controller
- Self Contained refrigeration
- ETL listed in accordance with UL 471 and NSF 7 standards
- Environmentally safe refrigerant
- Floor Drain Required

OPTIONAL FEATURES

- Remote refrigeration
- Rear Door Locks
- Slide-In base with legs

Self-Contained	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
VIAS1-27-R-SL-SC-FD Snackee	23 5/8	28	27 5/8	1/3	115	5.3	5-15P	529	R448A


Remote	L	D	H	BTU/h @ 14°F	VOLT	AMP	PLUG	WT	REFRIG.
VIAS1-27-R-SL-RR-FD Snackee	23 5/8	28	27 5/8	1263	115	0.5	5-15P	510	R448A

* UNITS ARE DESIGNED AS DROP-IN MODULES THAT REQUIRE RE-ENFORCED COUNTER SUPPORT.



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120


MODEL # VIAS1-27-R-SL-SC-FD SNACKEE

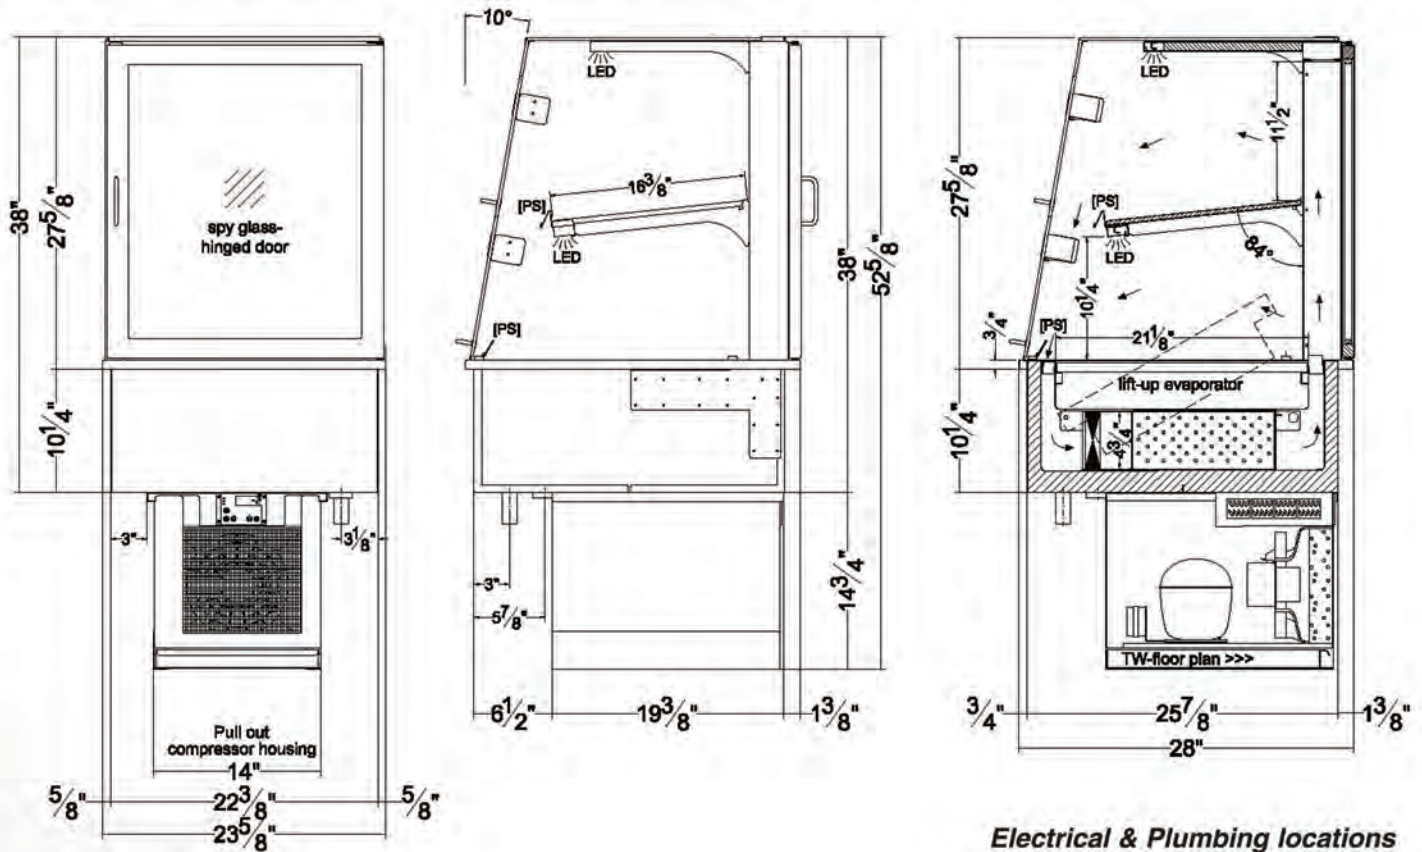

Electrical & Plumbing locations

2 1/2" HOLE REQUIRED FOR COOLING AND DRAINAGE LINES

floor plan

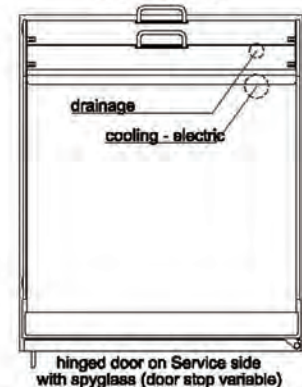

* 448a refrigeration available at no additional cost - please specify

1. A 1 1/8" diameter drain is provided. The drain **MUST** be connected to a floor drain or storage container **AT TIME OF INSTALLATION**.
2. For self-contained units, rear ventilation louvers, **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit.
3. For remote units, refrigerant must be verified by customer at the time of order to ensure proper expansion value is provided
4. The VIAS 1 snackee merchandiser is designed for use in locations where temperatures and humidity do not exceed 75 degrees and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the cases air current and refrigeration zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055