

MODEL # VIAS1-34-R-SL-SC SNACKEE

SPECIFICATIONS

The Vienna Series VIAS1-34-R-SL-SC-Snackee, self-service grab and go style refrigerated display with slanted glass profile. Features include 2 glass shelves with LED lights, rear mirrored hinged doors, rear ventilation. Available as a drop-in unit or with slide-in base with all stainless steel construction.

- Available lengths: 23 5/8"
 Available depths: 28"
 Available heights: 34 1/4" (ABOVE COUNTER)



STANDARD FEATURES

- Slanted style display
- Stainless steel exterior and interior
- Drop-in frame with flange
- Rear breathing
- Glass side panels
- (2) Glass shelves
- Hinged rear door, mirror polished on interior side
- Energy efficient LED lights
- Programmable digital display controller
- Self Contained refrigeration
- ETL listed in accordance with UL 471 and NSF 7 standards
- Environmentally safe refrigerant
- Floor Drain Required

OPTIONAL FEATURES

- Remote refrigeration
- Solid stainless steel rear panel
- Pull down night shade
- Rear door locks
- Removable locking Acrylic Night Cover
- Slide-in base with legs

Self-Contained	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
VIAS1-34-R-SL-SC- Snackee	23 5/8	28	34 1/4	3/4	208-230V	4.0	L14-20P	529	R452A


Self-Contained	L	D	H	BTU/h @ 14°F	VOLT	AMP	PLUG	WT	REFRIG.
VIAS1-34-R-SL-RR- Snackee	23 5/8	28	34 1/4	3993	115V	0.7	5-15P	510	Verify

* UNITS ARE DESIGNED AS DROP-IN MODULES THAT REQUIRE RE-ENFORCED COUNTER SUPPORT.



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No. 120


MODEL # VIAS1-34-R-SL-SC SNACKEE

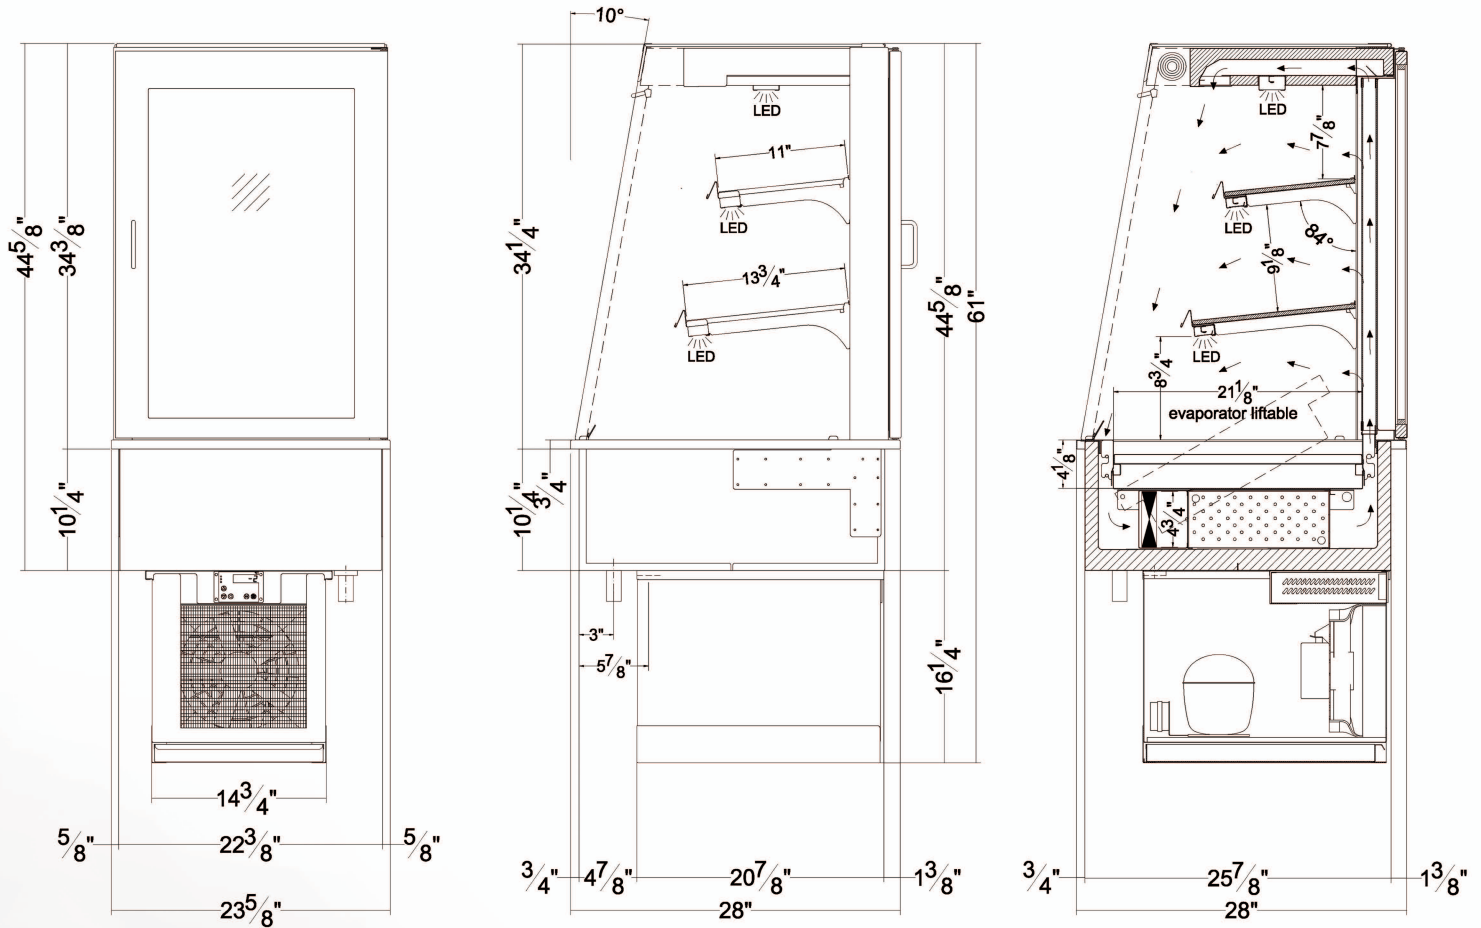

UNIT SHOWN WITH OPTIONAL PULL-DOWN NIGHT SHADE

Electrical & Plumbing locations

2 1/2" HOLE REQUIRED FOR COOLING AND DRAINAGE LINES

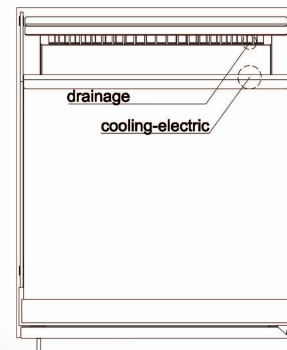

* 448a refrigeration available at no additional cost - please specify

1. A 1 1/8" diameter drain is provided. The drain MUST be connected to a floor drain or storage container AT TIME OF INSTALLATION.
2. For self-contained units, rear ventilation louvers, MUST be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit.
3. For remote units, refrigerant must be verified by customer at the time of order to ensure proper expansion value is provided
4. The VIAS 1 snackee merchandiser is designed for use in locations where temperatures and humidity do not exceed 75 degrees and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the cases air current and refrigeration zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055