

## MODEL # SCRFC MSAR

### SPECIFICATIONS

The Manhattan SCRFC MSAR Series is a three section display case consisting of a refrigerated self-service lower section, a refrigerated operator serve mid section and an operator serve non-refrigerated upper section, with side vision end panels. The lower section has a hemmed edge removable deck pan to contain spills. A glass shelf separates the mid and bottom sections for better visibility of product.



Available lengths:  48"  60"  72"

Available depths:  35 3/4"

Available heights:  55"


### STANDARD FEATURES

- Self-Contained Refrigeration
- Standard Grade Laminate Exterior
- Brushed Stainless Steel Interior Ends with vision end panels
- Removable Plexi Glass Sliding Doors (Upper Section)
- See-Through Mirrored Rear Sliding Doors (Lower Section)
- Energy Efficient Top Canopy and Shelf LED Lighting
- Intermediate Tempered Glass Shelf with Light (Mid Section)
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Electronic Digital Control and Defrost Termination
- Red Indicator Light Alerts Operator if Condenser Requires Cleaning
- Digital Temperature Display
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- 5 Year Compressor Warranty

### OPTIONAL FEATURES

- Remote Refrigeration
- Stainless Steel Exterior Finish
  - #4  #6  #8
- Special Laminates
- Wood Veneers (Stained & Sealed)
- Stainless Step Sham
- Casters (Increases Height by 4")
- Adjustable Legs (Consult Factory for Sizes)
- Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- Removable Locking Security Panels (Lower Section)
- Rear Door Locks
- Thermometer

## MODEL # SCRFC MSAR

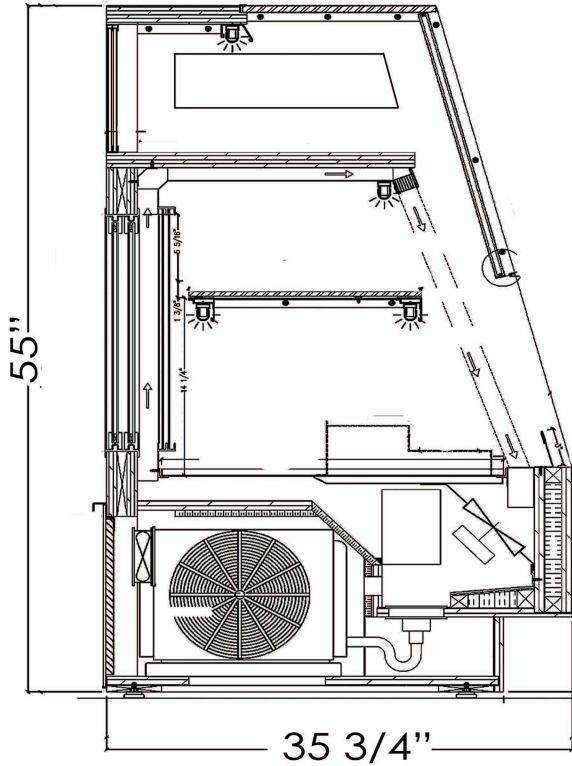

UNIT SHOWN WITH OPTIONAL STEP SHAM

### SELF - CONTAINED


MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCRFC4848R MSAR	48	35 3/4	55	1/2	115	13.4	5-20P	800	134A
SCRFC6048R MSAR	60	35 3/4	55	3/4	208 /230V	11.2	L14-20P	950	404A
SCRFC7248R MSAR	72	35 3/4	55	3/4	208 /230V	11.7	L14-20P	1080	404A

### REMOTE - REFRIGERATED

MODEL	BTU @ 20 °F	VOLT	AMP	PLUG	WT	REFRIG.
SCRFC4848R-RR MSAR	4140	115	1.82	5-15P	750	Verify
SCRFC6048R-RR MSAR	9960	115	1.90	5-15P	900	Verify
SCRFC7248R-RR MSAR	9960	115	1.92	5-15P	1000	Verify

\* 448a refrigeration available at no additional cost - please specify

### Electrical & Plumbing locations

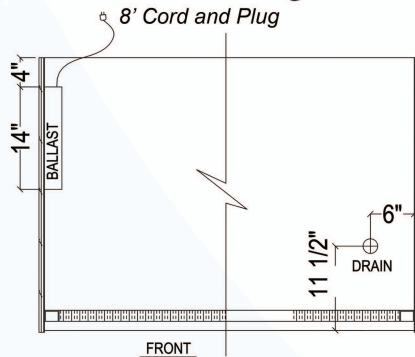

Conforms to UL Standard 471,  
and NSF Standard 7; Certified  
To CSA Standard C22.2 No. 120



**RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards**

1. All Self-Contained, Remote and Glycol Units must be run to a floor drain at time of installation.
2. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
3. The SCRFC MSAR merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055