

MODEL # SCRFC4848-MS-II

SPECIFICATIONS

The Manhattan SCRFC MS II Series is a three section display case consisting of a refrigerated self-service lower section, a refrigerated operator serve mid section and an operator serve non-refrigerated upper section made entirely of glass. The lower section has a hemmed edge removable deck pan to contain spills. A glass shelf separates the mid and bottom sections for better visibility of product.



Available lengths: ☐ 48" ☐ 60" ☐ 72"

Available depths: ☐ 35 3/4"

Available heights: ☐ 75 1/4"

STANDARD FEATURES

- Self-Contained Refrigeration
- Standard Grade Laminate Exterior
- Brushed Stainless Steel Interior Ends
- Removable Plexi Glass Sliding Doors (Upper Section)
- Ambient Glass Shelf (Upper Section)
- See-Through Mirrored Rear Sliding Doors (Lower Section)
- Top Canopy Light
- Energy Efficient LED Lighting
- Intermediate Tempered Glass Shelf with Light (Mid Section)
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Electronic Digital Control and Defrost Termination
- Red Indicator Light Alerts Operator if Condenser Requires Cleaning
- Digital Temperature Display
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- 5 Year Compressor Warranty

OPTIONAL FEATURES

- ☐ Remote Refrigeration
- ☐ Stainless Steel Exterior Finish
 - ☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Stainless Step Sham
- ☐ Casters (Increases Height by 4")
- ☐ Adjustable Legs (Consult Factory for Sizes)
- ☐ Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- ☐ Removable Locking Security Panels (Lower Section)
- ☐ Rear Door Locks
- ☐ Thermometer

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

MODEL # SCRFC4848-MS-II


SELF - CONTAINED

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCRFC4848R-MS-II	48	35 3/4	75 1/4	1/2	115	13.4	5-15P	800	134A
SCRFC6048R-MS-II	60	35 3/4	75 1/4	3/4	208/230	11.2	L14-30P	950	404A
SCRFC7248R-MS-II	72	35 3/4	75 1/4	3/4	208/230	11.7	L14-30P	1000	404A

* 448a refrigeration available at no additional cost - please specify


REMOTE - REFRIGERATED

MODEL	BTU @ 20° F	VOLT	AMP	PLUG	WT	REFRIG.
SCRFC4848R-RR-MS-II	4140	115	.82	5-15P	750	Verify
SCRFC6048R-RR-MS-II	9960	115	1.90	5-15P	900	Verify
SCRFC7248R-RR-MS-II	9960	115	1.92	5-15P	1000	Verify

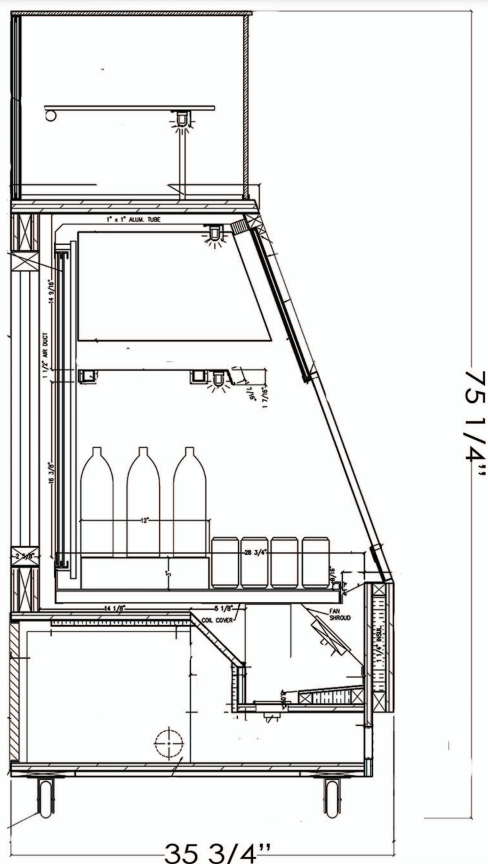

UNIT SHOWN WITH OPTIONAL CASTERS & STEP SHAM

Electrical & Plumbing locations

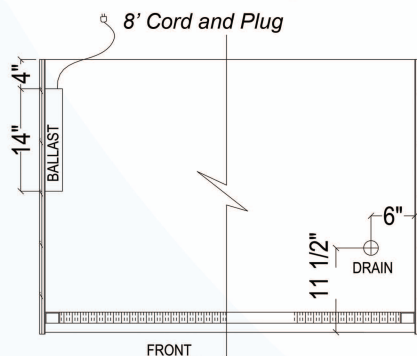

Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No. 120



RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. All Self-Contained, Remote and Glycol Units must be run to a floor drain at time of installation.
2. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
3. The SCRFC4848-MS-II merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v5_30_23