

MODEL # SCMB-CD-MTRH / MTLH-H54

SPECIFICATIONS

The Monarch Dual Over-Under refrigerated display case is made to be utilized with another Monarch Dual bakery display or with a Monarch Dual Over-Under display. The units are mitered to a 90 degree outside corner in lengths of 96" down to 72" on the customer side to allow for proper access on the service side. Tempered glass top and front on the upper section of the Over-Under and Grab an Go on the lower section for optimal service and visibility.



Available lengths: ☐ 72" ☐ 84" ☐ 96"

Available depths: ☐ 35 3/4"

Available heights: ☐ 54"

STANDARD FEATURES

Top Section (Ambient)

- Tempered glass top & front
- Mirrored laminate interior ends
- Sliding rear door clear plexiglass
- LED canopy light
- White laminated deck

Bottom Section (Refrigerated Grab & Go)

- Self-contained refrigeration
- Standard grade exterior laminate
- Mirrored laminate interior ends
- Energy Efficient LED Lighting
- 1 tempered glass shelf
- White laminated interior deck
- Insulated rear sliding doors
- 8' cord and plug
- ETL listed in Accordance with UL 471 and NSF 7 standards
- Environmentally safe refrigerant
- Floor drain required.

OPTIONAL FEATURES

- ☐ Remote Refrigeration
- ☐ Stainless Steel Exterior Finish
 - ☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Wood Veneers (Unfinished)
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Miscellaneous Trim
- ☐ Rear Door Locks
- ☐ Rear Fold-down Wrap Board
- ☐ Intermediate Custom Lengths
- ☐ Pull Down #23 Econo Frost Night Curtain (Bottom Section)

If the case is ambient and stand alone it will be provided with UV bonded glass. In the event an ambient case is joined with an airtight or heated cases, the UV bonded glass will be changed to insulated glass



CALL TOLL FREE: 800-525-3692 (609-714-2330)


FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v10_10_19

MODEL # SCMB-CD-MTRH / MTLH-H54

SELF - CONTAINED

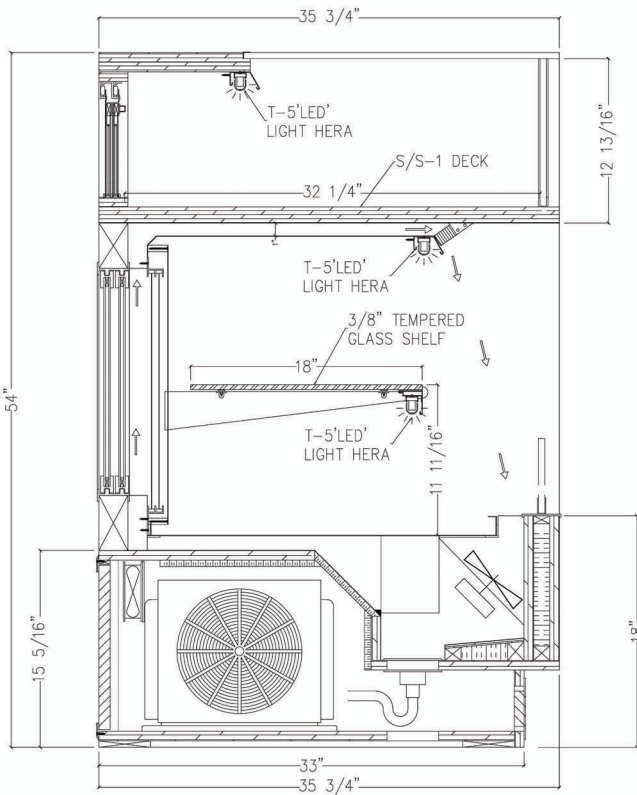


RIGHT-HAND	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCMB72R-CD-MTRH-H54	72	35 3/4	54	3/4	115/208-230	12.9	L14-30P	980	404A
SCMB84R-CD-MTRH-H54	84	35 3/4	54	3/4	115/208-230	13.5	L14-30P	1090	404A
SCMB96R-CD-MTRH-H54	96	35 3/4	54	3/4	115/208-230	13.6	L14-30P	1070	404A

LEFT-HAND	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCMB72R-CD-MTLH-H54	72	35 3/4	54	3/4	115/208-230	12.9	L14-30P	980	404A
SCMB84R-CD-MTLH-H54	84	35 3/4	54	3/4	115/208-230	13.5	L14-30P	1090	404A
SCMB96R-CD-MTLH-H54	96	35 3/4	54	3/4	115/208-230	13.6	L14-30P	1070	404A


REMOTE - REFRIGERATED

RIGHT-HAND	BTU @ 20 °F	VOLT	AMP	PLUG	WT	REFRIG.
SCMB72R-RR-CD-MTRH-H54	6950	115	3.2	5-15P	915	Verify
SCMB84R-RR-CD-MTRH-H54	6950	115	3.8	5-15P	1025	Verify
SCMB96R-RR-CD-MTRH-H54	6950	115	3.9	5-15P	1105	Verify

LEFT-HAND	BTU @ 20 °F	VOLT	AMP	PLUG	WT	REFRIG.
SCMB72R-RR-CD-MTLH-H54	6950	115	3.2	5-15P	915	Verify
SCMB84R-RR-CD-MTLH-H54	6950	115	3.8	5-15P	1025	Verify
SCMB96R-RR-CD-MTLH-H54	6950	115	3.9	5-15P	1105	Verify

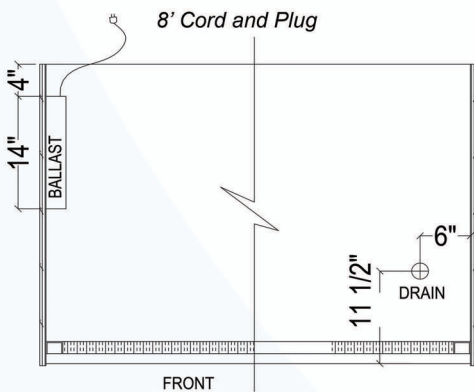

Electrical & Plumbing locations



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120

RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. All units must be run to a floor drain at time of installation.

2. The SCMB-MTRH / MTLH-H54 merchandiser is designed for use in stores where temperature and humidity do not exceed 75 degrees F and 55% R. H. Locate away from direct sunlight, rapid air currents and extreme temperature changes, Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the case's air curtain and refrigerated zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v10_1_19