

MODEL # SCMB-SQ

SPECIFICATIONS

The Monarch Modified SCMB-SQ Series is a refrigerated display case with a choice of standard grade plastic laminate exterior ends and with a squared insulated glass profile.

Available in refrigerated or non-refrigerated.

Available lengths: 35" 47" 59" 71" 95"
 Available depths: 37 1/4"
 Available heights: 50"



STANDARD FEATURES

- Self Contained Refrigeration
- Fixed Flat Heated Front Glass
- Standard Grade Laminate Exterior
- Black Base
- 1/2" Thick Insulated Glass Side Panels with Heater Wire **
- #8 Mirror Glass Trim
- Interior Vision End Panels
- White Laminated Deck
- LED Top Canopy Light
- (3) Tempered Glass Shelves with LED Lights
- See-Through Mirrored Rear Sliding Doors
- Thermometer
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- Floor Drain Required
- 5 Year Compressor Warranty


OPTIONAL FEATURES

- Remote Refrigeration (Floor Drain Required)
- Stainless Steel Exterior Finish
 - #4 #6 #8
- Special Laminates
- Wood Veneers (Unfinished)
- Wood Veneers (Stained & Sealed)
- Miscellaneous Trim
- Brass Trim and Hardware
- Wire Shelves
 - Brass White Black Chrome
- Casters (Increases Height by 4")
- Adjustable Legs (Consult Factory for Sizes)
- Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- Stainless Steel Laminated Deck
- Rear Door Locks
- 8" Wrap Board
- Corian® Surface Top
- Granite Surface Top

If the case is ambient and stand alone it will be provided with UV bonded glass. In the event an ambient case is joined with an airtight or heated cases, the UV bonded glass will be changed to insulated glass



MODEL # SCMB-SQ

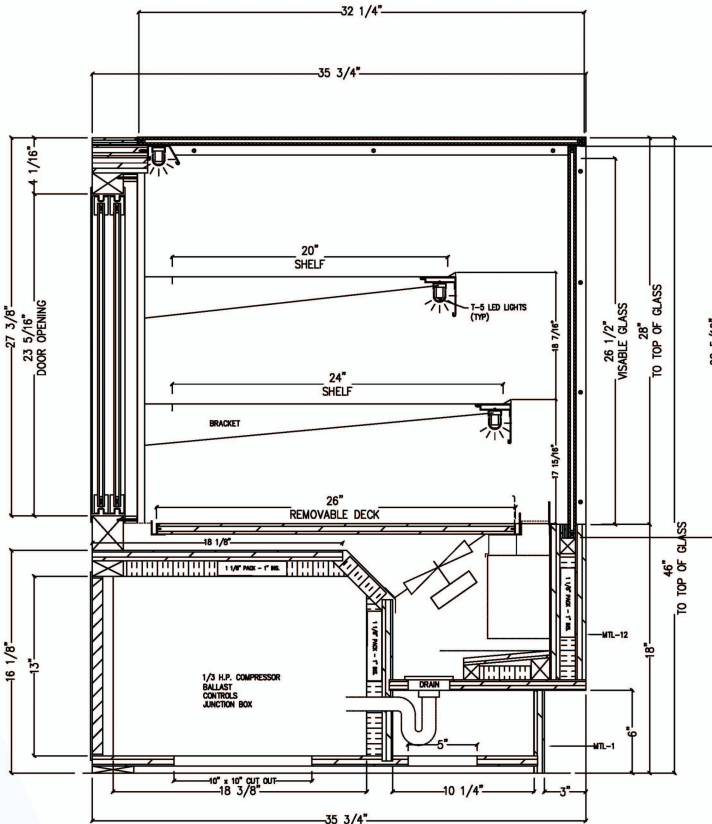

SELF - CONTAINED

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCMB36R-SQ	35	37 1/4	50	1/4	115	7.7	5-15P	525	134A
SCMB48R-SQ	47	37 1/4	50	1/3	115	10.1	5-15P	675	134A
SCMB60R-SQ	59	37 1/4	50	1/3	115	10.2	5-15P	700	134A
SCMB72R-SQ	71	37 1/4	50	1/2	115	14.7	5-20P	1000	134A
SCMB96R-SQ	95	37 1/4	50	1/2	115	15.2	5-20P	1100	134A

AMBIENT

MODEL	L	D	H	VOLT	AMP	PLUG	WT
SCMB36D-SQ	35	37 1/4	50	115	.30	5-15P	325
SCMB48D-SQ	47	37 1/4	50	115	.60	5-15P	450
SCMB60D-SQ	59	37 1/4	50	115	.70	5-15P	550
SCMB72D-SQ	71	37 1/4	50	115	.80	5-15P	700
SCMB96D-SQ	95	37 1/4	50	115	1.0	5-15P	900


REMOTE - REFRIGERATED

MODEL	BTU @ 20° F	VOLT	AMP	PLUG	WT	REFRIG.
SCMB36R-RR-SQ	1890	115	2.4	5-15P	475	Verify
SCMB48R-RR-SQ	2360	115	2.6	5-15P	625	Verify
SCMB60R-RR-SQ	2360	115	2.7	5-15P	660	Verify
SCMB72R-RR-SQ	4140	115	3.6	5-15P	940	Verify
SCMB96R-RR-SQ	4140	115	4.4	5-15P	1020	Verify

* 448a refrigeration available at no additional cost - please specify

GLYCOL

MODEL	BTU @ 20° F	VOLT	AMP	PLUG	WT	GPM	REFRIG.
SCMB36R-RR-GL-SQ	1890	115	2.4	5-15P	475	.5	GLYCOL
SCMB48R-RR-GL-SQ	2360	115	2.6	5-15P	625	.59	GLYCOL
SCMB60R-RR-GL-SQ	2360	115	2.7	5-15P	660	.59	GLYCOL
SCMB72R-RR-GL-SQ	4140	115	3.6	5-15P	940	1.0	GLYCOL

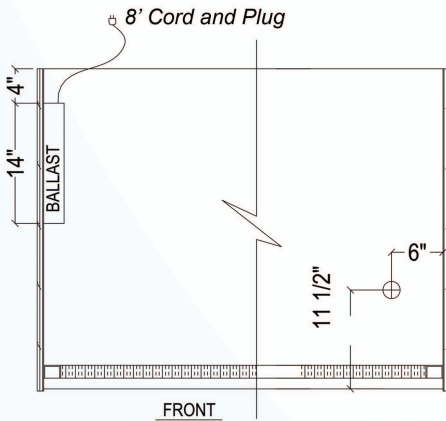

Electrical & Plumbing locations



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No. 120



RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. All Remote and Glycol units must be run to a floor drain at time of installation.
 2. The SCMB-SQ merchandiser is designed for use in stores where temperature and humidity do not exceed 75 degrees F and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Any adverse field conditions stated above will void warranty.
- RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)
 FAX: 609-714-2331 www.rpiindustries.com
 220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v5_30_23