

MODEL # SCMB-CD-UVBG-H54

SPECIFICATIONS

The Monarch Seamless Series display case is a two compartment display case consisting of a non-refrigerated service top section and a refrigerated self-service bottom section. Available with a choice of standard grade plastic laminate exterior. The lower section has stainless steel deck pan(s) and raised fitted hemmed edge to contain spills. The upper section is a highly visible display made with 1/2" tempered UV bonded glass, front, top and sides.

Available lengths: ☐ 36" ☐ 48" ☐ 60" ☐ 72"
 Available depths: ☐ 35 3/4"
 Available heights: ☐ 54"



STANDARD FEATURES

- Self-Contained Refrigeration
- Standard Grade Laminate Exterior
- Mirrored Interior Laminate End Panels
- Black Base
- **Upper Section**
 - Non-Refrigerated Full Service
 - 1/2" Tempered UV Bonded Glass (Top, Front, Sides)
 - LED Top Canopy Light
 - (2) Tempered Glass Shelves
 - White Laminated Deck
 - See-Through Mirrored Rear Sliding Doors
- **Bottom Section**
 - Refrigerated Self-Service
 - LED Top Canopy Light
 - Stainless Steel Perforated Interior Back Panel
 - Removable Stainless Steel Deck Pan(s) with Hemmed Edge to Contain Spills
- Thermometer
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- Floor Drain Required
- 5 Year Compressor Warranty

OPTIONAL FEATURES

- ☐ Remote Refrigeration
- ☐ Stainless Steel Exterior Finish
 - ☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Wood Veneers (Unfinished)
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Miscellaneous Trim
- ☐ Black Styrene Step Sham (Bottom Section)
- ☐ Stainless Steel Step Sham (Bottom Section)
- ☐ Casters (Increases Height by 4")
- ☐ Adjustable Legs (Consult Factory for Sizes)
- ☐ Powder Coated Interior Back Panel and Hardware
 - ☐ Black ☐ White
- ☐ Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- ☐ Mirrored Polished Stainless Steel Interior Back Panel (#8 Finish)
- ☐ Stainless Steel Laminated Deck (Upper Section)
- ☐ Pull Down #23 Econo Frost Night Curtain (Bottom Section)
- ☐ Removable Locking Security Panels (Bottom Section)
- ☐ Rear Door Locks (Upper Section)
- ☐ 8" Wrap Board




CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v10_1_19

MODEL # SCMB-CD-UVBG-H54

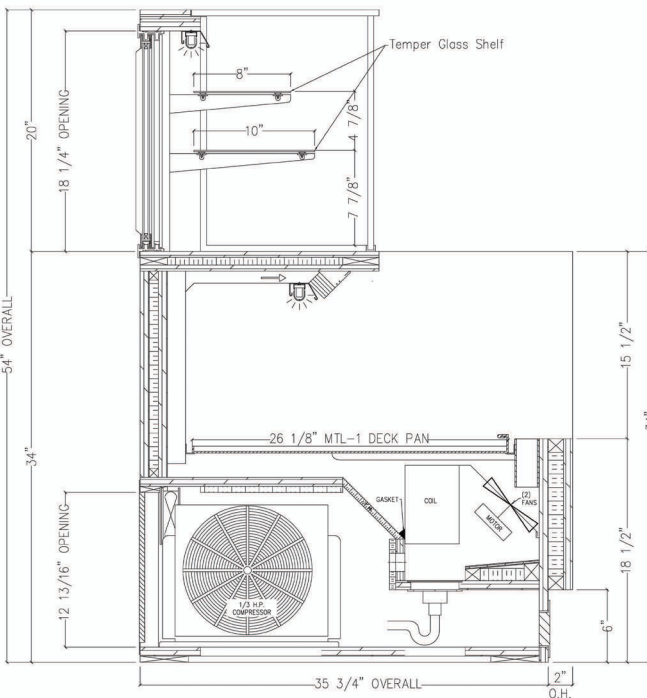


SELF - CONTAINED


MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCMB36R-CD-UVBG-H54	36	35 3/4	54	1/3	115	13.5	5-20P	700	134A
SCMB48R-CD-UVBG-H54	48	35 3/4	54	1/2	115	13.6	5-20P	800	134A
SCMB60R-CD-UVBG-H54	60	35 3/4	54	3/4	115/208-230	11.4	L14-30P	925	134A
SCMB72R-CD-UVBG-H54	72	35 3/4	54	3/4	115/208-230	12.1	L14-30P	1100	134A

REMOTE - REFRIGERATED

MODEL	BTU@ 20 F	VOLT	AMP	PLUG	WT	REFRIG.
SCMB36R-CD-UVBG-H54-RR	4140	115	2.0	5-15P	600	Verify
SCMB48R-CD-UVBG-H54-RR	4140	115	2.1	5-15P	750	Verify
SCMB60R-CD-UVBG-H54-RR	7470	115	2.1	5-15P	875	Verify
SCMB72R-CD-UVBG-H54-RR	7470	115	3.0	5-15P	1000	Verify

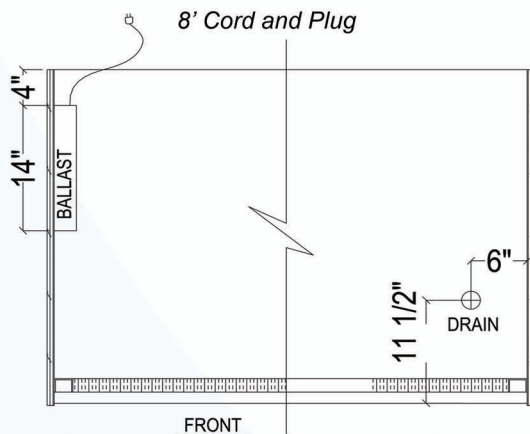

Electrical & Plumbing locations



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. All units must be run to a floor drain at time of installation.
2. The SCMB-CD-UVBG-H54 merchandiser is designed for use in stores where temperature and humidity do not exceed 75 degrees F and 55% R. H. Locate away from direct sunlight, rapid air currents and extreme temperature changes, Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the case's air curtain and refrigerated zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v10_1_19