

MODEL # SCMB / SCMC-UVBG-H48



SPECIFICATIONS

The Monarch Trio Series display cases are set of Bakery and Candy display cases that are individual units or designed to attach in the field with a soft joint application. Once installed they are not interchangeable, they must remain in the order and style that they were purchased. These cases can be individual unit bakery refrigerated / refrigerated remote or ambient or Confectionery cases temperature controlled / remote or ambient. Mix and match to suit your design!

STANDARD FEATURES

Refrigerated Unit(s)

- Self-contained refrigeration
- Standard grade exterior laminate
- Mirrored laminate interior ends
- 1/2" tempered glass top
- 1/2" tempered glass front
- Energy Efficient LED Lighting
- (2) Tempered glass shelves
- White laminated interior deck
- Insulated see through rear sliding doors
- 8' cord and plug
- ETL listed in Accordance with UL 471 and NSF 7 standards
- Environmentally safe refrigerant
- Self Evaporating Condensing unit
- Floor Drain Required (Remote Only)

Ambient Unit(s)

- Standard grade laminate
- 1/2" tempered glass top & front
- (2) tempered glass shelves with LED Lighting
- White laminated deck
- See through mirrored rear sliding access doors

Available lengths: ☐ 36" ☐ 48" ☐ 60" ☐ 72"
 Available depths: ☐ 35 3/4"
 Available heights: ☐ 48"

OPTIONAL FEATURES

- ☐ Remote Refrigeration
- ☐ Stainless Steel Exterior Finish
 - ☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Wood Veneers (Unfinished)
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Miscellaneous Trim
- ☐ Rear Door Locks
- ☐ Rear Wrap Board (Fold down)
- ☐ Intermediate Lengths (Custom)

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com


220 ROUTE 70, MEDFORD, NJ 08055



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120



MODEL # SCMB / SCMC-UVBG-H48

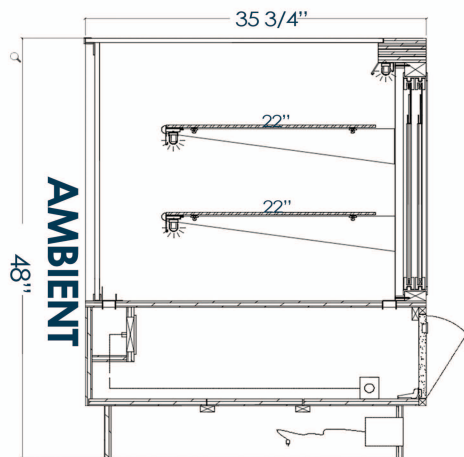

AMBIENT

MODEL	L	D	H	VOLT	AMP	PLUG	WT
SCMB36D-UVBG-H48	36	35 3/4	48	115	.18	5-15P	465
SCMB48D-UVBG-H48	48	35 3/4	48	115	.30	5-15P	605
SCMB60D-UVBG-H48	60	35 3/4	48	115	.39	5-15P	630
SCMB72D-UVBG-H48	72	35 3/4	48	115	.48	5-15P	820

SELF - CONTAINED

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCMB36R-UVBG-H48	36	35 3/4	48	1/4	115	6.8	5-15P	525	134A
SCMB48R-UVBG-H48	48	35 3/4	48	1/3	115	9.4	5-15P	675	134A
SCMB60R-UVBG-H48	60	35 3/4	48	1/3	115	9.5	5-15P	700	134A
SCMB72R-UVBG-H48	72	35 3/4	48	1/2	115	14.1	5-20P	900	134A

REMOTE - REFRIGERATED



MODEL	BTU @ 20°F	VOLT	AMP	PLUG	WT	REFRIG.
SCMB36R-RR-UVBG-H48	1890	115	1.5	5-15P	485	Verify
SCMB48R-RR-UVBG-H48	2360	115	1.7	5-15P	625	Verify
SCMB60R-RR-UVBG-H48	2360	115	1.8	5-15P	650	Verify
SCMB72R-RR-UVBG-H48	4140	115	2.5	5-15P	850	Verify

SELF - CONTAINED

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCMC36R-UVBG-H48	36	35 3/4	48	1/4	115	6.13	5-15P	400	134A
SCMC48R-UVBG-H48	48	35 3/4	48	1/4	115	6.25	5-15P	475	134A
SCMC60R-UVBG-H48	60	35 3/4	48	1/4	115	6.34	5-15P	560	134A
SCMC72R-UVBG-H48	72	35 3/4	48	1/4	115	6.43	5-15P	725	134A

REMOTE - REFRIGERATED

MODEL	BTU @ 15°F	VOLT	AMP	PLUG	WT	REFRIG.
SCMC36R-RR-UVBG-H48	600	115	0.8	5-15P	360	Verify
SCMC48R-RR-UVBG-H48	1050	115	0.95	5-15P	435	Verify
SCMC60R-RR-UVBG-H48	1050	115	1.04	5-15P	520	Verify
SCMC72R-RR-UVBG-H48	1350	115	1.13	5-15P	685	Verify

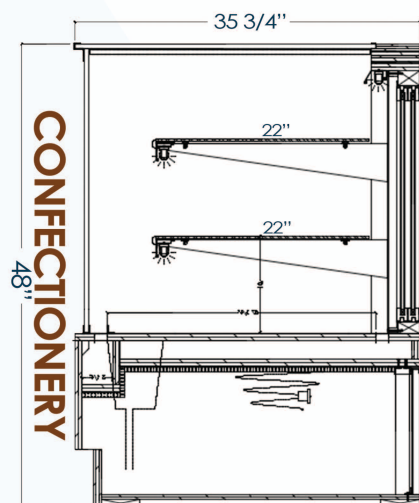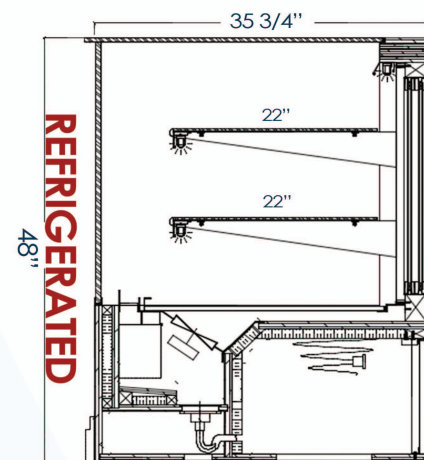

RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055