Olympus Ambient - Micro Market

PROJECT:_	
ITEM:	QUANTITY:

MODEL # SCASD-II-AMBIENT-MM

ςP	FC	ΙFΙ	$C\Delta$	T		21/
.)			\ . <i>\</i>	۱ ۱۱	I ()	N.)

The Olympus Ambient Micro Market Series is a grab and go style dry display, built and designed for the extended micro-market series line-up displays. Units are available with wood veneer exteriors, LED lighting, and the flexibility for you to create the line-up footprint of your choosing!

NOTE: If unit is lined-up with Flexeserve Heated, overall depth will increase to 34"

Available lengths:	24 "	□ 36"	<i>∐ 48"</i>	□ 60"
Available depths:	☐ 32"			

Available heights: 78"



STANDARD FEATURES

- Squared Top Canopy
- Standard Grade Laminate Exterior, Interior & Deck
- Top Bracket designed to accommodate header panel
- LED Top Canopy Light
- (3) Slanted fixed laminated shelves with LED lighting
- 8' Cord and Plug
- 1 Year Parts and Labor Warranty

OPTIONAL FEATURES

- □ Roll Down Locking Security Cover
- □ 24" High Header Panel (Graphics by others)
 - □16" High Lightbox Insert Header □ Backlit top header
 - □Laminate Header

72"


- ☐ Stainless Steel Exterior Finish
 - □ #4 #8
- ☐ Special Laminates
- ☐ Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- ☐ Front Decorative Panels
- ☐ Wire Shelves
 - □White □Black □Chrome
- ☐ Finished Back
- ☐ Powder Coated Interior Back Panel and Hardware:
 - □ Black □ White □ Custom Color
- ☐ Casters (Increases height by 6")
- ☐ Front Merchandising Wire Baskets (Slat Wall Exterior Required, Consult Factory)
 - \square Style A \square Style B \square Style C
- ☐ Front Merchandising Tables & Ladders (Top Mount or Remote units only)
 - \Box Style A \Box Style B




PROJECT:

TOLL FREE: 800-525-3692

MODEL # SCASD-II-AMBIENT-MM

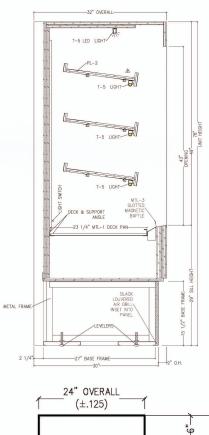


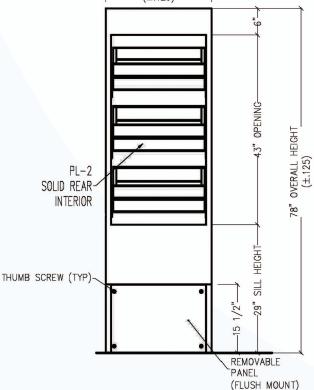

AMBIENT

MODEL	L	D	Н	VOLT	AMP	PLUG	WT
SCAS24D-II-MM	24	32	78	115	0.15	5-15P	350
SCAS36D-II-MM	36	32	78	115	0.4	5-15P	625
SCAS48D-II-MM	48	32	78	115	0.52	5-15P	800
SCAS60D-II-MM	60	32	78	115	0.65	5-15P	920
SCAS72D-II-MM	72	32	78	115	0.78	5-15P	1050

NOTE: A minimum of 18" clearance needed above unit for air discharge







Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

^{* (}If graphic top header is included, minimum of 18" clearance required above top header.