

MODEL # SCAS-V-TC-PD

SPECIFICATIONS

The Olympus V Turbo Porte Cachee With Patented Lockable Pocket Door System Includes New Turbo Chill Technology For the Ultimate For Food Safety. Unit Has An Internal Sensor Monitoring Food Temperature That Is Preset To Activate Turbo Mode By Closing Motorized Night Shade If Product Reaches 39.5° Degree, Unit Will Stay In Brief Chilling Mode Until Product Achieves 37.5° Degree Which Will Then Reopen Front Night Shade.

- Available lengths: 48"
- Available depths: 33 5/16"
- Available heights: 78 1/2"



*Shown with optional side vision end panels

STANDARD FEATURES

- Self-Contained Refrigeration
- Squared Top Canopy
- Solid Contoured End Panels
- (NEW) Smart Controller Electronic Food Product Simulator Probe And Safety Sensor (HMI) Interface
- Metal Frame Base Construction with Lift-Out Black Louvered Air Grill For Easy Access To Compressor
- Standard Grade Laminate Exterior
- Brushed Stainless Steel Interior Ends
- Stainless Steel Perforated Interior Back Panel
- 4000K LED Top Canopy Light
- (4) Adjustable Stainless Steel Shelves for Maximum Capacity, with 4000K LED Lighting
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Red Indicator Light Alerts Operator if Condenser Requires Cleaning
- Unique Internal Baffle Design for Compressor Noise Reduction
- Front Air Intake with Top Rear Air Discharge for Zero Clearance
- Easy Slide-Out Condensing Unit For Service
- 8' Cord and Plug
- Turbo Chill Mode
- Motorized Turbo Curtain Comes Down During Turbo Mode
- Standard Air Screen When Not In Turbo Mode
- One Set Of (2) Electro-Magnetic Lock Insulated Front Hinged See Through Pocket Doors
- ETL Listed in Accordance with UL 471 and NSF 7 Type II Refrigeration
- Environmentally Safe Refrigerant
- Built-in Condensate Evaporator System
- 1 Year Parts and Labor Warranty
- 5 Year Compressor Warranty
- 2 Position Down Slant Bracket For Tiltable Shelves

OPTIONAL FEATURES

- Square End Profile (32" deep)
- Side Vision End Panels
- Insulated Glass Vision End Panels
- Remote Refrigeration
- Front Decorative Panels (Remote Refrigerated Units Only, Consult Factory)
- Special Laminates
- Stainless Steel Exterior Finish
 - #4 #8
- Finished Back with Air Grill:
 - Stainless Steel Black
- Wood Veneers (Stained & Sealed)
- Casters:
 - 3" 6"
- Adjustable Legs Up To 6"
- Powder Coated Interior Back Panel and Hardware
 - Black White Custom Color
- Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- Mirrored Polished Stainless Steel Perforated Interior Back Panel (#8 Finish)
- Joining Kit Hardware
- Acrylic Product Stop For Stainless Steel Shelving
- 3000k LED Lights

*Some options may change electrical requirements.

CALL TOLL FREE: 800-525-3692 (609-714-2330)
FAX: 609-714-2331 www.rpiindustries.com
220 ROUTE 70, MEDFORD, NJ 08055






Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120

Conforms to NSF STD 7
TYPE II

DOE 2017
Energy Efficiency
Compliant



MODEL # SCAS-V-TC-PD

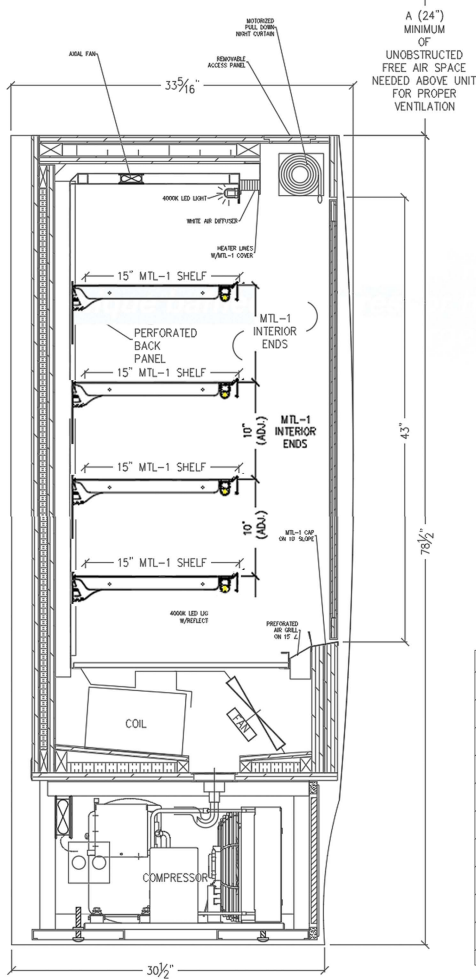

SELF - CONTAINED With Evaporator Pan

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCAS48R-V-TC-PD	48	33 5/16	78 1/2	1	115/208-230	4 wire	16.8	L14-30P	900 404A

SELF - CONTAINED With Floor Drain

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCAS48R-V-TC-PD	48	32	78 1/2	1	115/208-230	12	L14-20P	900	404A

NOTE: A minimum of 24" unobstructed free air space above unit required for proper ventilation.

REMOTE - REFRIGERATED


MODEL	BTUH @ 20 F	VOLT	AMP	PLUG	WT	REFRIG.
SCAS48R-V-TC-PD-RR	7470	115	3.3	5-15P	800	Verify

GLYCOL

MODEL	BTUH @ 20 F	VOLT	AMP	PLUG	WT	GPM	REFRIG.
SCAS48R-V-TC-PD-RR-GL	7470	115	3.3	5-15P	800	2.0	GLYCOL

NOTE: Remote and GLYCOL cases require separate 115v 15 amp circuit if evaporator pan is purchased (pan is shipped loose).

* 448a refrigeration available at no additional cost - please specify

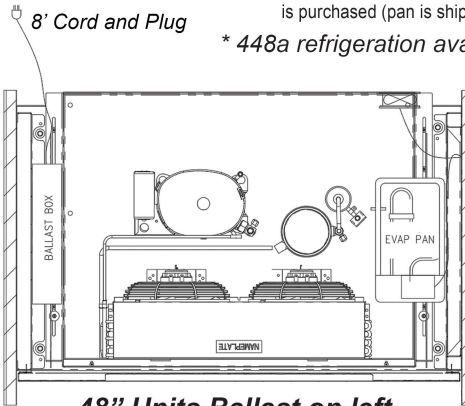

**48" Units Ballast on left
 Electrical & Plumbing locations**

HOW THE DOORS WORK

Doors attach to arm, that tracks along an interior rail system (A), top and bottom mounted hinges allow for opening/closing (B), this combined system allows for the pull-out doors, to "Pocket-in" during peak hours (C & D)



RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
2. The SCAS-V-TC-PD merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

