

MODEL # SCAS-II-PD-MM

SPECIFICATIONS

The Olympus II Porte Cachee Micro Market series SCAS-PD-MM, is a grab and go style refrigerator with a unique sliding, hinged pocket door system that allows the unit to function as a hinged glass door merchandiser during non-peak hours, or as a grab and go, fully-open, by manually sliding the doors back inside the pocketed end panels.

- Available lengths: 48"
Available depths: 32"
Available heights: 78"



Door functionality details on reverse side

STANDARD FEATURES

- DOE 2017 Compliant
- Self-Contained Refrigeration
- Squared Top Canopy
- Metal Frame Base Construction
- Removable Front Panel & Louvered Air Grill for Easy Access to Compressor
- Standard Grade Laminate Exterior
- Top Bracket designed to accommodate header panel
- One Set of (2) Insulated Front Sliding-Hinged Pocket Doors
- Brushed Stainless Steel Interior Ends
- Stainless Steel Perforated Interior Back Panel
- LED Top Canopy Light
- (4) Adjustable Stainless Steel Extra Deep Shelves for Maximum Capacity, with LED Lighting
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Electronic Digital Temperature Control and Defrost Termination
- Red Indicator Light Alerts Operator if Condenser Requires Cleaning
- Unique Internal Baffle Design for Compressor Noise Reduction
- Front Air Intake with Top Rear Air Discharge for Zero Clearance
- Easy Slide-Out Condensing Unit
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Conforms to NSF STD 7 Type II Refrigeration
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- Floor Drain Required

OPTIONAL FEATURES

- Condensate Evaporator Pan
- 24" High Header Panel (Graphics by others)
 - 16" High Lightbox Insert Header
 - Backlit top header
- Stainless Steel Exterior Finish
 - #4
 - #8
- Special Laminates / Acrylic Exterior Finishes (Consult Factory)
- Remote Refrigeration
- Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- Mirrored Polished Stainless Steel Perforated Interior Back Panel (#8 Finish)

ADDITIONAL OPTIONAL FEATURES

- Front Decorative Panels (Remote Refrigerated Units Only, Consult Factory)
- Wood Veneers (Stained & Sealed)
- Top Mount Proximity Motion Sensor for interior light
- Wire Shelves
 - White
 - Black
 - Chrome
- Tempered 3/8" Glass Shelving
- U Shape Front Shelf Merchandiser
- Casters (Increases Height by 6")
- Adjustable Legs (Consult Factory for Sizes)
- Powder Coated Interior Back Panel and Hardware
 - Black
 - White
 - Custom Color
- Finished Back with Air Grill:
 - Stainless Steel
 - Black
- Front Merchandising Wire Baskets (Slat Wall Exterior Required, Consult Factory)
 - Style A
 - Style B
 - Style C
- Front Merchandising Tables & Ladders (Top Mount or Remote units only)
 - Style A
 - Style B
 - Style C
 - Style D
 - Style E
 - Style F
 - Style G
 - Style H
 - Style I
 - Style J

CALL TOLL FREE: 800-525-3692 (609-714-2330)
FAX: 609-714-2331 www.rpiindustries.com
220 ROUTE 70, MEDFORD, NJ 08055





Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No. 120

Conforms to NSF STD 7
TYPE II

DOE 2017
Energy Efficiency
Compliant



MODEL # SCAS-II-PD-MM

SELF - CONTAINED - Floor Drain

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCAS48R-II-PD-MM	48	32	78	1	115/208-230 4 wire	11.0	L14-20P	900	404A

SELF - CONTAINED - With Evaporator Pan

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCAS48R-II-PD-MM	48	32	78	1	115/208-230 4 wire	15.8	L14-30P	900	404A

NOTE: A minimum of 18" clearance needed above unit for air discharge for self contained units.

* 448a refrigeration available at no additional cost - please specify




REMOTE - REFRIGERATED

MODEL	BTUH @ 20 F	EVAP 90 F	A MB	VOLT	AMP	PLUG	WT	REFRIG.
SCAS48R-II-PD-RR-MM	7470			115	10.6	5-15P	800	Verify

GLYCOL

MODEL	BTUH @ 20 F	EVAP 90 F	A MB	VOLT	AMP	PLUG	WT	GPM	REFRIG.
SCAS48R-II-PD-RR-GL-MM	7470			115	10.6	5-15P	800	2.0	GLYCOL

* If graphic top header is included, minimum of 18" clearance required above top header.

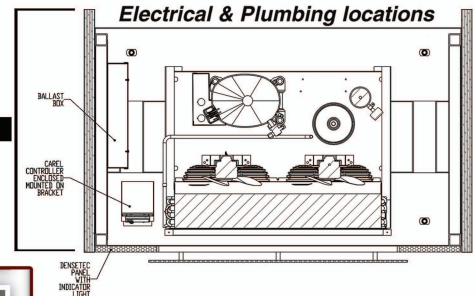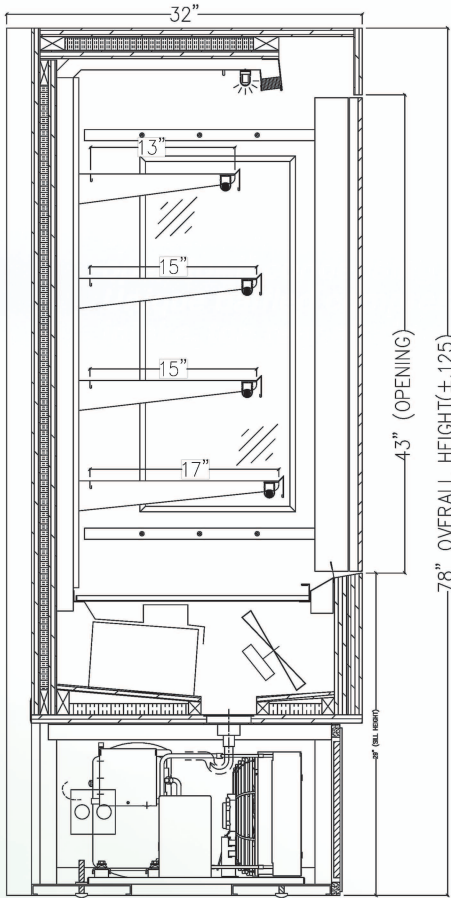

HOW THE DOORS WORK

Doors attach to arm, that tracks along an interior rail system (A), top and bottom mounted hinges allow for opening/closing (B), this combined system allows for the pull-out doors, to "Pocket-in" during peak hours (C & D)



RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
2. The SCAS-PD merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

