

OLYMPUS II TURBO CHILL™ AIR SCREEN

PROJECT: _____
ITEM: _____ **QUANTITY:** _____

MODEL # SCAS-II TC SMART

SPECIFICATIONS

THE OLYMPUS II TURBO CHILL AIR SCREEN WITH SMART CONTROLLER IS A UNIQUE PATENTED DESIGN THAT GIVES OPERATORS THE FLEXIBILITY TO PROGRAM THEIR PARAMETERS INTO THE UNIT FOR MONITORING FOOD TEMPERATURES AT SPECIFIC LEVELS. IF THE PROBE REACHES 39.5, THE INTELLIGENCE BUILT INTO THE SMART CONTROLLER WILL THEN ACTIVATE A MOTORIZED ROLL DOWN DOOR, CLOSING THE UNIT. "TURBO CHILL" WILL THEN ENGAGE UNTIL PRODUCT IS BROUGHT DOWN TO 37.5 DEGREES.

AS SOON AS THE PRODUCT REACHES THE PROGRAMMED TEMPERATURE, THE DOOR AUTOMATICALLY OPENS, CONTINUING YOUR GRAB AND GO SERVICE!



Available lengths: ☐ 60"

Available depths: ☐ 32"

Available heights: ☐ 78"

STANDARD FEATURES

- DOE 2017 Compliant
- Motorized Roll Down Locking Security Cover
- Smart Controller Food Product Simulator Probe and Safety Sensor
- Unique Internal Baffle Design for Compressor Noise Reduction
- Front Air Intake with Top Rear Air Discharge for Zero Clearance
- Red Indicator Light Alerts Operator if Condenser Requires Cleaning
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Standard Grade Laminate Exterior
- Self-Contained Refrigeration
- Standard Air Screen Storage Unit
- Easy Slide-Out Condensing Unit
- Squared Top Canopy
- Metal Frame Base Construction with Lift-Out Black Louvered Air Grill for Easy Access to Compressor
- Brushed Stainless Steel Interior Ends
- Stainless Steel Perforated Interior Back Panel
- 4000K LED Top Canopy Light
- (3) Adjustable Stainless Steel Extra Deep Shelves 4000K LED Lights
- Electronic Digital Control and Defrost Termination
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Conforms to NSF STD 7 Type II Refrigeration
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- Floor Drain Required
- 5 Year Compressor Warranty

OPTIONAL FEATURES

- ☐ Condensate Evaporator Pan
- ☐ Remote Refrigeration (Consult Factory)
- ☐ Front Decorative Panels (Remote Refrigerated Units Only, Consult Factory)
- ☐ Stainless Steel Exterior Finish
 - ☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Miscellaneous Trim
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Wire Shelves:
 - ☐ Brass ☐ White ☐ Black ☐ Chrome
- ☐ Mirrored Polished Stainless Steel Shelves (#8 Finish)
- ☐ Casters (Increases Height by 6")
- ☐ Adjustable Legs (Consult Factory for Sizes)
- ☐ Powder Coated Interior Back Panel and Hardware:
 - ☐ Black ☐ White ☐ Custom Color
- ☐ Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- ☐ Mirrored Polished Stainless Steel Perforated Interior Back Panel (#8 Finish)
- ☐ Finished Back with Black Air Grill
- ☐ Stainless Steel Louvered Air Grill
- ☐ Fold Down Stainless Steel V-Ribbed Tray Slide
- ☐ Fold Down Corian® Tray Slide
- ☐ Stationary Corian® Tray Ledge
- ☐ 3000K LED Lights

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055




Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No. 120



RPI INDUSTRIES, INC. v5_20_24

MODEL # SCAS-II TC SMART

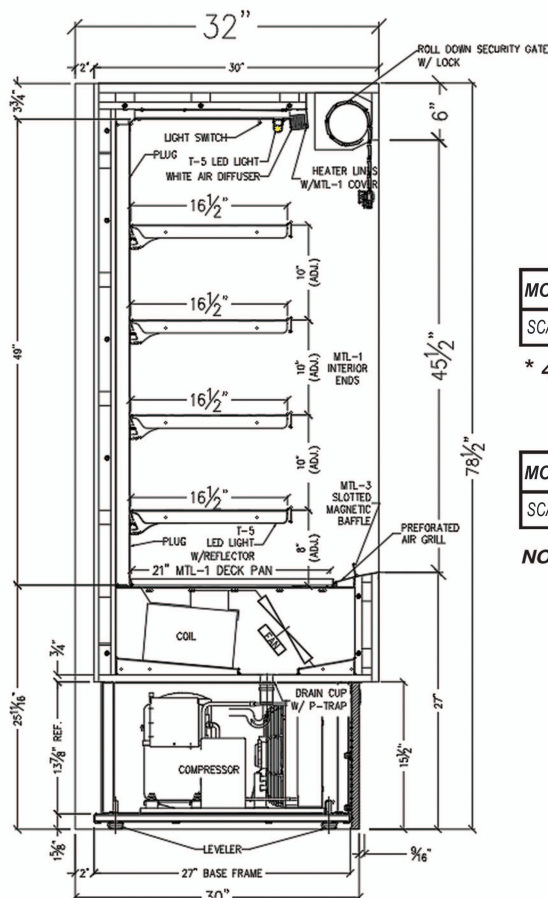

SELF - CONTAINED - Floor Drain


MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCAS60R-II TC SMART	60	32	78	1 1/4	115/208-230 4 wire	12.1	L14-20P	1178	404A

* 448a refrigeration available at no additional cost - please specify

SELF - CONTAINED - With Evaporator Pan

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCAS60R-II TC SMART	60	32	78	1 1/4	115/208-230 4 wire	16.9	L14-30P	1178	404A

NOTE: A minimum of 18" clearance needed above unit for air discharge for self contained units.

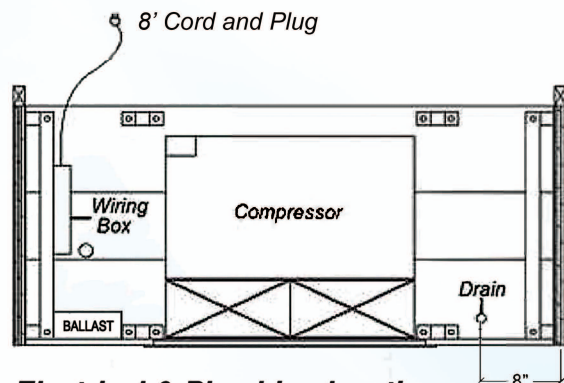

Electrical & Plumbing locations



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120



RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
 2. The SCAS-II TC SMART merchandiser is designed for use in locations where temperature and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the case's air curtain and refrigerated zone within.
- Any adverse field conditions stated above will void warranty.
- RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice.