


## MODEL # SCAS-V-S-TC SMART

### SPECIFICATIONS

The Olympus V Turbo With New Turbo Chill Technology For the Ultimate For Food Safety. Unit Has An Internal Sensor Monitoring Food Temperature That Is Preset To Activate Turbo Mode By Closing Motorized Night Shade If Product Reaches 39.5° Degree, Unit Will Stay In Brief Chilling Mode Until Product Achieves 37.5° Degree Which Will Then Reopen Front Night Shade.

Available lengths: ☐ 60"  
 Available depths: ☐ 32"  
 Available heights: ☐ 78 1/2"

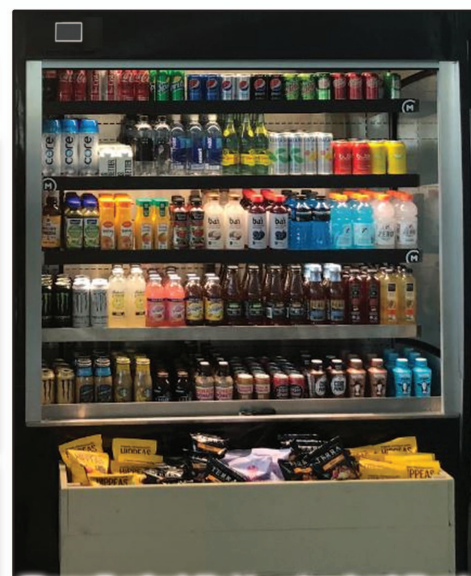

\*Shown with optional side vision end panels and chip rack

### STANDARD FEATURES

- Self-Contained Refrigeration
- Squared Top Canopy
- Solid Squared End Panels
- Smart Controller Electronic Food Product Simulator Probe And Safety Sensor
- Metal Frame Base Construction with Lift-Out Black Louvered Air Grill For Easy Access To Compressor
- Standard Grade Laminate Exterior
- Brushed Stainless Steel Interior Ends
- Stainless Steel Perforated Interior Back Panel
- 4000K LED Top Canopy Light
- Vertical Recessed Power Supply For Undershelf Light
- (4) Adjustable Stainless Steel Extra Deep Shelves for Maximum Capacity, with 3000K LED Lighting
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Red Indicator Light Alerts Operator if Condenser Requires Cleaning
- Unique Internal Baffle Design for Compressor Noise Reduction
- Front Air Intake with Top Rear Air Discharge for Zero Clearance
- Easy Slide-Out Condensing Unit For Service
- 8' Cord and Plug
- Turbo Chill Mode
- Motorized Turbo Curtain Roll Down Security Cover
- Standard Air Screen When Not In Turbo Mode
- ETL Listed in Accordance with UL 471 and NSF 7 Type II Refrigeration
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- 5 Year Compressor Warranty
- Built In Condensate Evaporator System

### OPTIONAL FEATURES

- ☐ Side Vision End Panels
- ☐ Heated Insulated Glass Vision End Panels
- ☐ Remote Refrigeration
- ☐ Front Decorative Panels (Remote Refrigerated Units Only, Consult Factory)
- ☐ Special Laminates
- ☐ Stainless Steel Exterior Finish
  - ☐ #4 ☐ #8
- ☐ Finished Back with Air Grill:
  - ☐ Stainless Steel ☐ Black
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Wire Shelves
  - ☐ White ☐ Black ☐ Chrome
- ☐ Casters:
  - ☐ 3" ☐ 6"
- ☐ Adjustable Legs Up To 6"
- ☐ Powder Coated Interior Back Panel and Hardware
  - ☐ Black ☐ White ☐ Custom Color
- ☐ Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- ☐ Mirrored Polished Stainless Steel Perforated Interior Back Panel (#8 Finish)
- ☐ Joining Kit Hardware
- ☐ Acrylic Product Stop For Stainless Steel Shelving
- ☐ Motorized Door With Back-Up Battery
- ☐ 3000K LED Lighting



Conforms to UL Standard 471,  
and NSF Standard 7; Certified  
To CSA Standard C22.2 No.120



CALL TOLL FREE: 800-525-3692 (609-714-2330)


FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055




INDUSTRIES, INC. v8\_2\_24

## MODEL # SCAS-V-S-TC SMART

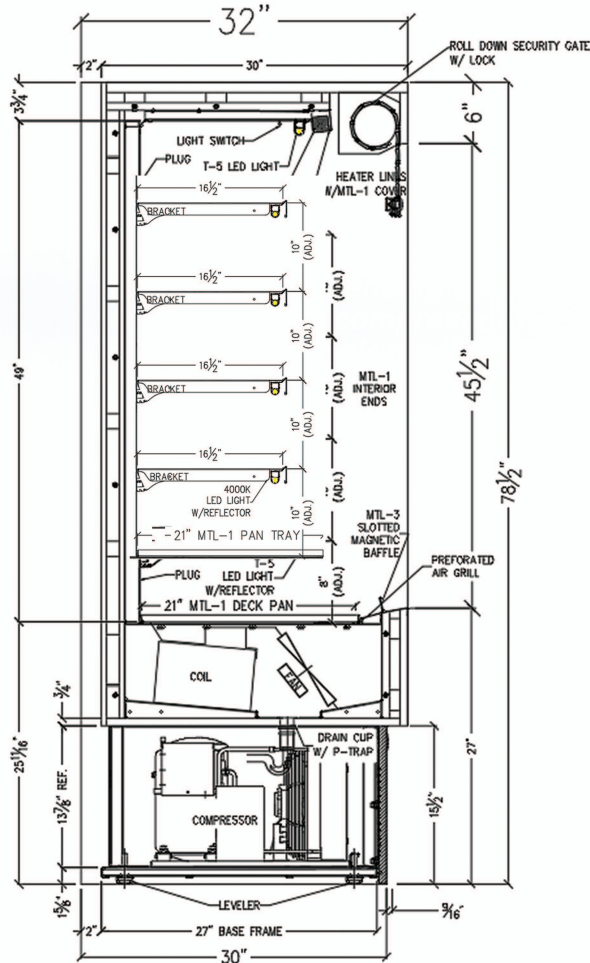

**Electrical & Plumbing locations**

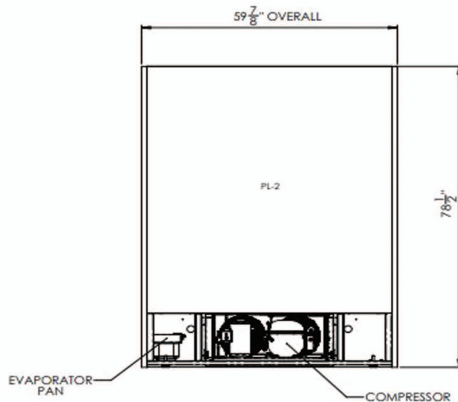

### SELF - CONTAINED - With Evaporator Pan

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCAS60R-V-S TC SMART	60	32	78 1/2	1 1/4	115/208-230 4 wire	19.9	L14-30P	1178	404A

### SELF - CONTAINED - Floor Drain

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCAS60R-V-S TC SMART	60	32	78 1/2	1 1/4	115/208-230 4 wire	15.1	L14-20P	1178	404A

**NOTE:** A minimum of 18" clearance needed above unit for air discharge for self contained units.  
\* 448a refrigeration available at no additional cost - please specify



Conforms to UL Standard 471,  
and NSF Standard 7; Certified  
To CSA Standard C22.2 No.120

Conforms to NSF STD 7  
**TYPE II**

**DOE 2017**  
Energy Efficiency  
Compliant

**RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards**

1. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
2. The SCAS-V-S-TC SMART merchandiser is designed for use in locations where temperature and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the case's air curtain and refrigerated zone within.

Any adverse field conditions stated above will void warranty.

RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055

**RPI INDUSTRIES, INC.** v8\_2\_24