

MODEL # SCCB

SPECIFICATIONS _____

The Continental SCCB Series is a refrigerated display case with a choice of standard grade plastic laminate exterior ends with fixed curved front insulated glass.

Available in refrigerated and non-refrigerated.

Available lengths: 36" 48" 60" 72" 96"

Available depths: 30" 35 3/4"

Available heights: 50"



STANDARD FEATURES

- Self-Contained Refrigeration
- Fixed Curved Front Insulated Glass
- Standard Grade Laminate Exterior
- Black Base
- Interior Vision End Panels
- White Laminated Deck
- LED Top Canopy Light
- (3) Tempered Glass Shelves with LED Lights
- See-Through Mirrored Rear Sliding Doors
- Thermometer
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- Built-In Condensate Evaporator (No Floor Drain Required)
- 5 Year Compressor Warranty

OPTIONAL FEATURES

- Stainless Steel Exterior Finish
 - #4 #6 #8
- Special Laminates
- Wood Veneers (Unfinished)
- Wood Veneers (Stained & Sealed)
- Miscellaneous Trim
- Brass Trim and Hardware
- Wire Shelves
 - Brass White Black Chrome
- Casters (Increases Height by 4")
- Adjustable Legs (Consult Factory for Sizes)
- Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- Stainless Steel Laminated Deck
- Rear Door Locks
- 8" Wrap Board

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



INDUSTRIES, INC. v5_30_23



MODEL # SCCB

SELF - CONTAINED

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCCB36R	36	30-35 3/4	50	1/4	115	5.3	5-15P	525	134A
SCCB48R	48	30-35 3/4	50	1/3	115	8.8	5-15P	675	134A
SCCB60R	60	30-35 3/4	50	1/3	115	9.0	5-15P	700	134A
SCCB72R	72	30-35 3/4	50	1/2	115	13.4	5-20P	1000	134A
SCCB96R	96	30-35 3/4	50	1/2	115	14.0	5-20P	1100	134A

AMBIENT

MODEL	L	D	H	VOLT	AMP	PLUG	WT
SCCB36D	36	30-35 3/4	50	115	.50	5-15P	450
SCCB48D	48	30-35 3/4	50	115	.60	5-15P	600
SCCB60D	60	30-35 3/4	50	115	.70	5-15P	625
SCCB72D	72	30-35 3/4	50	115	.80	5-15P	850
SCCB96D	96	30-35 3/4	50	115	1.01	5-15P	950



REMOTE - REFRIGERATED

MODEL	BTU @ 20° F	VOLT	AMP	PLUG	WT	REFRIG.
SCCB36R-RR	1890	115	.90	5-15P	475	Verify
SCCB48R-RR	2360	115	1.18	5-15P	625	Verify
SCCB60R-RR	2360	115	1.28	5-15P	650	Verify
SCCB72R-RR	4140	115	2.76	5-15P	875	Verify
SCCB96R-RR	4140	115	2.35	5-15P	975	Verify

* 448a refrigeration available at no additional cost - please specify

GLYCOL

MODEL	BTU @ 20° F	VOLT	AMP	PLUG	WT	GPM	REFRIG.
SCCB36R-RR-GL	1890	115	.90	5-15P	475	.5	GLYCOL
SCCB48R-RR-GL	2360	115	1.18	5-15P	625	.59	GLYCOL
SCCB60R-RR-GL	2360	115	1.28	5-15P	650	.59	GLYCOL
SCCB72R-RR-GL	4140	115	1.76	5-15P	875	1.0	GLYCOL

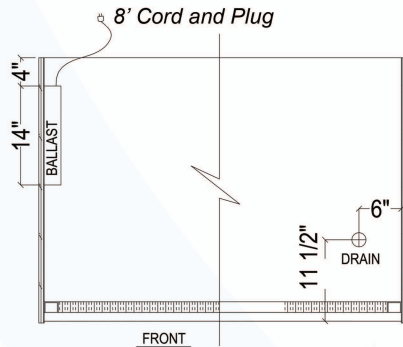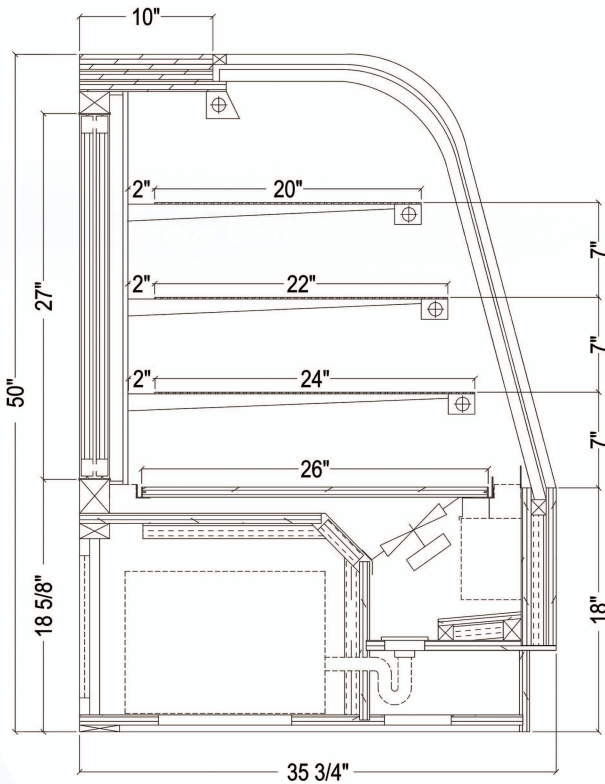

Electrical & Plumbing locations



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120



RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. All Remote and Glycol units must be run to a floor drain at time of installation.
 2. The SCCB merchandiser is designed for use in stores where temperature and humidity do not exceed 75 degrees F and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Any adverse field conditions stated above will void warranty.
- RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)
 FAX: 609-714-2331 www.rpiindustries.com
 220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v5_30_23