

FIXED GLASS MODEL # SCLB

SPECIFICATIONS

The LaRond SCLB Series is a refrigerated display case with a choice of standard grade plastic laminate exterior ends and with fixed curved front insulated glass.

Available in refrigerated or non-refrigerated.

Available lengths: ☐ 35" ☐ 47" ☐ 59" ☐ 71" ☐ 95"

Available depths: ☐ 30" ☐ 35 3/4" ☐ 37 1/4" (CUSTOM PROFILE)

Available heights: ☐ 50"



STANDARD FEATURES

- Self-Contained Refrigeration (*Excluding 36" Units*)
- Fixed Curved Front Insulated Glass
- Standard Grade Laminate Exterior
- Black Base
- Interior Vision End Panels
- White Laminated Deck
- LED Top Canopy Light
- (3) Tempered Glass Shelves with LED Lights
- See-Through Mirrored Rear Sliding Doors
- Thermometer
- 8' Cord and Plug
ETL Listed in Accordance with UL 471
- and NSF 7 Standards
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- Built-In Condensate Evaporator
- 5 Year Compressor Warranty

OPTIONAL FEATURES

- ☐ Remote Refrigeration
- ☐ Stainless Steel Exterior Finish
 - ☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Wood Veneers (Unfinished)
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Miscellaneous Trim
- ☐ Brass Trim and Hardware
- ☐ Wire Shelves
 - ☐ Brass ☐ White ☐ Black ☐ Chrome
- ☐ Casters (Increases Height by 4")
- ☐ Adjustable Legs (Consult Factory for Sizes)
- ☐ Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- ☐ Stainless Steel Laminated Deck
- ☐ Insulated Glass Vision End Panels
- ☐ Rear Door Locks
- ☐ 8" Wrap Board



CALL TOLL FREE: 800-525-3692 (609-714-2330)



FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



INDUSTRIES, INC. v5_30_23

FIXED GLASS MODEL # SCLB

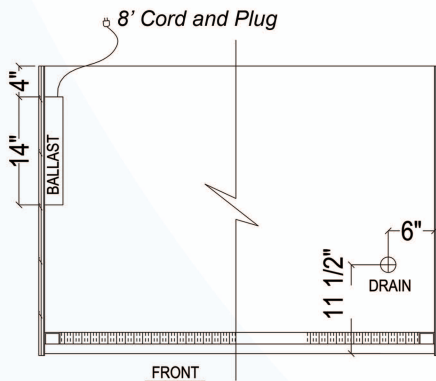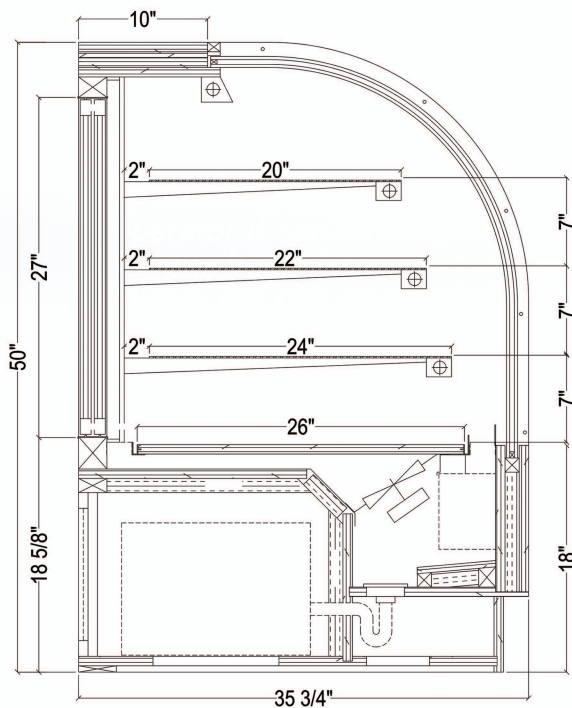

Electrical & Plumbing locations

SELF - CONTAINED

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCLB48R	47	30-35 3/4	50	1/3	115	9.4	5-15P	675	134A
SCLB60R	59	30-35 3/4	50	1/3	115	9.6	5-15P	700	134A
SCLB72R	71	30-35 3/4	50	1/2	115	14.3	5-20P	1000	134A
SCLB96R	95	30-35 3/4	50	1/2	115	15.0	5-20P	1100	134A

AMBIENT

MODEL	L	D	H	VOLT	AMP	PLUG	WT
SCLB36D	35	30-35 3/4	50	115	.50	5-15P	450
SCLB48D	47	30-35 3/4	50	115	.60	5-15P	600
SCLB60D	59	30-35 3/4	50	115	.70	5-15P	625
SCLB72D	71	30-35 3/4	50	115	.80	5-15P	900
SCLB96D	95	30-35 3/4	50	115	1.0	5-15P	1000

REMOTE - REFRIGERATED

MODEL	BTU @ 20° F	VOLT	AMP	PLUG	WT	REFRIG.
SCLB36R-RR	1890	115	1.6	5-15P	475	Verify
SCLB48R-RR	2360	115	1.8	5-15P	625	Verify
SCLB60R-RR	2360	115	1.9	5-15P	650	Verify
SCLB72R-RR	4140	115	2.7	5-15P	925	Verify
SCLB96R-RR	4140	115	3.5	5-15P	1025	Verify

* 448a refrigeration available at no additional cost - please specify

GLYCOL

MODEL	BTU @ 20° F	VOLT	AMP	PLUG	GPM	WT	REFRIG.
SCLB36R-RR-GL	1890	115	1.6	5-15P	.5	475	GLYCOL
SCLB48R-RR-GL	2360	115	1.8	5-15P	.5	625	GLYCOL
SCLB60R-RR-GL	2360	115	1.9	5-15P	.59	650	GLYCOL
SCLB72R-RR-GL	4140	115	2.7	5-15P	.59	925	GLYCOL



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No. 120



RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. All Remote and Glycol units must be run to a floor drain at time of installation.
 2. The SCLB merchandiser is designed for use in stores where temperature and humidity do not exceed 75 degrees F and 55% R.H.
Locate away from direct sunlight, rapid air currents and extreme temperature changes. Any adverse field conditions stated above will void warranty.
- RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)
 FAX: 609-714-2331 www.rpiindustries.com
 220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v5_30_23