

MODEL # SWINS

SPECIFICATIONS

The SWIN Air Screen is a refrigerated Grab And Go style refrigeration. The self-contained refrigeration system includes digital controls allowing unit to engage in minimal defrost cycles. Front air intake, with rear air discharge reducing noise level with zero clearance from wall installation, unit comes standard with (4) adjustable shelves and (1) LED canopy light.



Available lengths: 36" 48" 60" 72"

Available depths: 33 5/16"

Available heights: 81"

STANDARD FEATURES

- DOE 2017 Compliant
- Self-Contained Refrigeration
- Squared Top Canopy
- Metal Frame Base Construction with Lift-Out Black Louvered Air Grill for Easy Access to Compressor
- Black Laminate Exterior
- (1) LED Canopy Light
- (4) Adjustable Black Shelves
- Black Hemmed Deck Pan to Contain Spills
- Energy Efficient #23 Pull-Down Night Curtain
- Black Perforated Interior Back Panel
- Electronic Digital Control and Defrost Termination
- Digital Temperature Display
- Front Air Intake with Top Rear Air Discharge for Zero Clearance From Wall)
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Conforms to NSF STD 7 Type II Refrigeration
- Environmentally Safe Refrigerant
- Condensate Evaporator Pan
- Thermometer
- 1 Year Parts and Labor Warranty
- 5 Year Compressor Warranty

OPTIONAL FEATURES

- Remote Refrigeration
- Casters (Increases Height by 6")
- Adjustable Legs (Increase Height By 6")
- LED Lights Under Shelves
- Roll Down Locking Cover
- Removable Security Panel
- Stainless Steel Interior (including shelves)
- Stainless Steel Exterior Finish
- Stainless Steel Shelves
- Exterior Laminate Finishes
 - 949-58 White
 - 9244-58 Classic White
 - 459-58 Brite White
 - 7197-58 Dover White
 - 920-58 Almond
 - 927-58 Folkstone
 - 9243-58 Zen Grey
 - 9242-58 Gull Grey
 - 961-58 Fog
 - 756-58 Natural Maple
 - 86992-58 Hard Rock Maple
 - 7012-58 Amber Maple
 - 9237-58 Sand Maple
 - 9238-58 Chelsea Maple
 - 5904-43 Wild Cherry
 - 9240-58 Cherry Hardwood
 - 9236-43 (V4) Noble Mahagony
 - 9300-58 Grey Grafix
 - 8955-43 Cinnamon Cherry
 - 9288-43 (V4) Kona
 - 9374-43 Cocoa Oak


CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



MODEL # SWINS

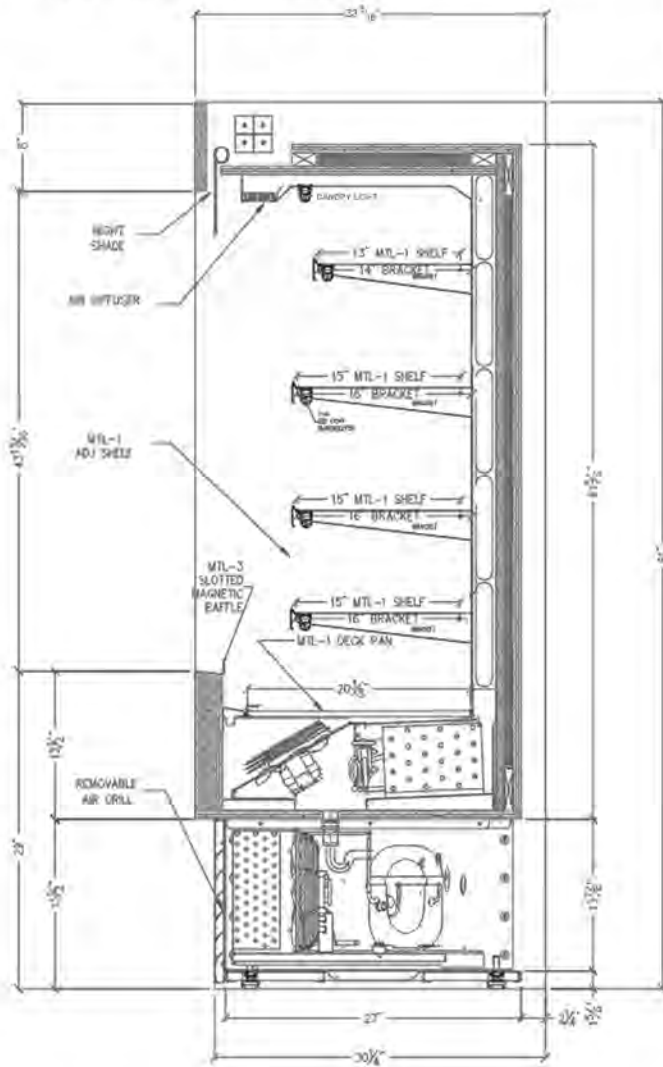

SELF - CONTAINED - Floor Drain

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT
SWINS36	36	33 5/16	81	1/2	115	12	5-20P	675
SWINS48	48	33 5/16	81	1	115/208-230 4 wire	11.0	L14-20P	900
SWINS60	60	33 5/16	81	1 1/4	115/208-230 4 wire	11.0	L14-20P	1020
SWINS72	72	33 5/16	81	1 1/4	115/208-230 4 wire	14.1	L14-20P	1150

SELF - CONTAINED - With Evaporator Pan


MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT
SWINS36	36	33 5/16	81	1/2	115	14.6	5-20P	675
SWINS48	48	33 5/16	81	1	115/208-230 4 wire	15.8	L14-20P	900
SWINS60	60	33 5/16	81	1 1/4	115/208-230 4 wire	17.04	L14-30P	1020
SWINS72	72	33 5/16	81	1 1/4	115/208-230 4 wire	17.54	L14-30P	1150

* 448a refrigeration available at no additional cost - please specify

REMOTE REFRIGERATED

MODEL	BTU / H@20 F	VOLT	AMP	PLUG	WT	REFRIG.
SWINS36-RR	4140	115	10.3	5-15P	625	Verify
SWINS48-RR	7470	115	10.6	5-15P	800	Verify
SWINS60-RR	9960	115	10.6	5-15P	920	Verify
SWINS72-RR	9960	115	11.1	5-15P	1050	Verify

Electrical & Plumbing locations

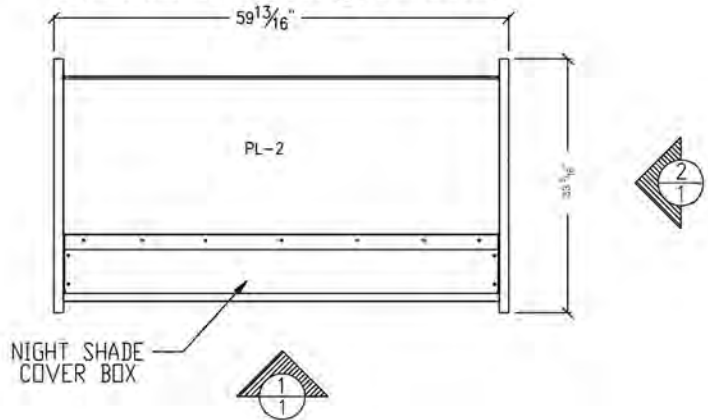

Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

Conforms to NSF STD 7
TYPE II

DOE 2017
Energy Efficiency
Compliant

RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

1. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
 2. The SWINS48 merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 80 Degrees Fahrenheit and 60% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.
- RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.