

VIENNA REMOTE SALAT SWITCH

PROJECT: _____
ITEM: _____ QUANTITY: _____

MODEL # VIAP-RR-SALAT SWITCH

SPECIFICATIONS

The Vienna Salat Switch is a drop-in salad bar display which offers dual temperature settings for hot and cold product. Tempered glass display with lift-up front glass doors maintains case temperature and product freshness but allows for easy self-service application. Front flip doors are lockable in 3 positions; for NSF serving as well as operator cleaning and loading. This space saving single-sided unit has the ability for flat or slanted presentation. Unit can also be provided with a stainless base and legs for slide-in application or freestanding display.

Available lengths: ☐ 30 1/8" ☐ 43" ☐ 55 3/4" ☐ 81 1/4"

Available depths: ☐ 27 3/8"

Available heights: ☐ 31 7/8"



STANDARD FEATURES

- Remote Refrigeration
- 304 Stainless Steel Exterior & Interior
- Adjustable Deck Pan to Convert to Slanted Display
- Easy Removable Deck Pans for Cleaning
- Tempered Glass With Front Flip-Up Doors
- Gas Spring Door Lift in 3 Lockable Positions
- Mirrored perforated rear air tower
- Mirrored rear interior back wall
- LED Top Canopy Light
- Hot Plates
- Warming Lights
- Programmable Digital Refrigeration Controller
- Forced Air Cooling System
- Lift-Up Evaporator
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- Floor Drain Required

OPTIONAL FEATURES

- ☐ Self-Contained Refrigeration
- ☐ Stainless Steel Base
- ☐ 6" Stainless Legs
- ☐ Integrations Modular Counter (Consult Factory)
- ☐ Adapter Bars for Standard Pans (Pans Not Included)

MODEL	L	D	H	PANS	BTU	VOLT	AMP	PLUG	WT	REFRIG.	CUT-OUT SIZE
VIAP2-0-R-RR-SALAT SWITCH	30 1/8	27 3/8	31 7/8	2	1263	115/208-230V 4-wire	6.7	L14-20P	445	134A	29 x 26 1/4
VIAP3-0-R-RR-SALAT SWITCH	43	27 3/8	31 7/8	3	1638	115/208-230V 4-wire	9.0	L14-20P	564	134A	41 3/4 x 26 1/4
VIAP4-0-R-RR-SALAT SWITCH	55 3/4	27 3/8	31 7/8	4	2048	115/208-230V 4-wire	13.6	L14-20P	665	134A	54 1/2 x 26 1/4
VIAP6-0-R-RR-SALAT SWITCH	81 1/4	27 3/8	31 7/8	6	2816	115/208-230V 4-wire	10	L14-20P	954	134A	80 1/4 x 26 1/4

*BTU/h @ 14°F evap



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055






INDUSTRIES, INC. v5_24_23

VIENNA REMOTE SALAT SWITCH

PROJECT: _____

TOLL FREE: 800-525-3692

MODEL # VIAP-RR-SALAT SWITCH

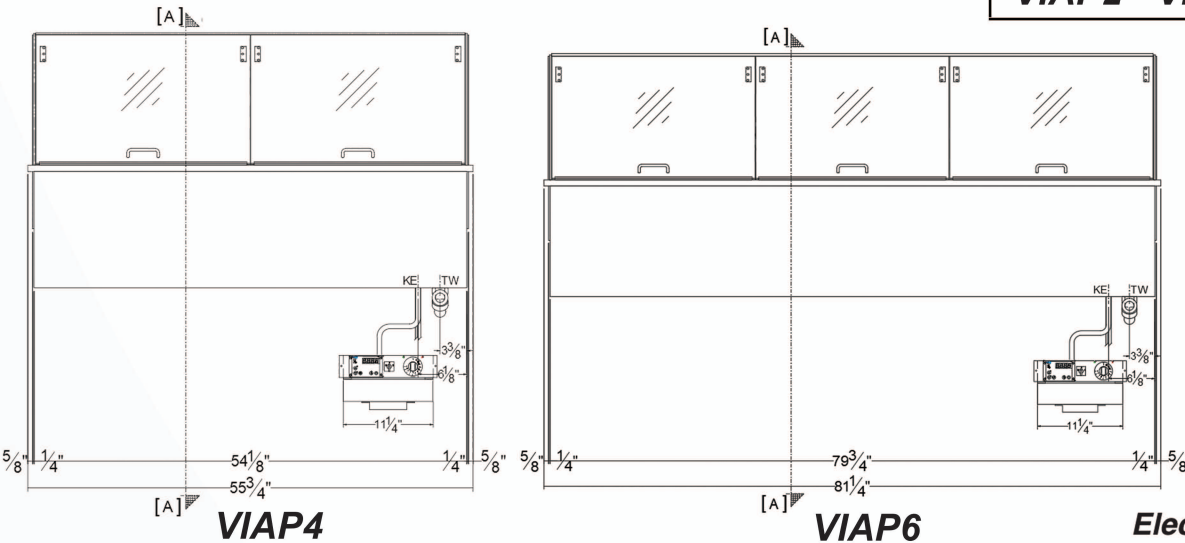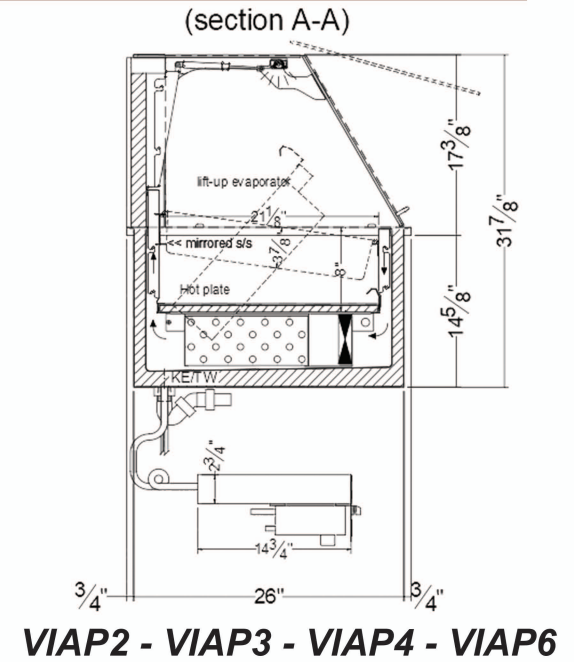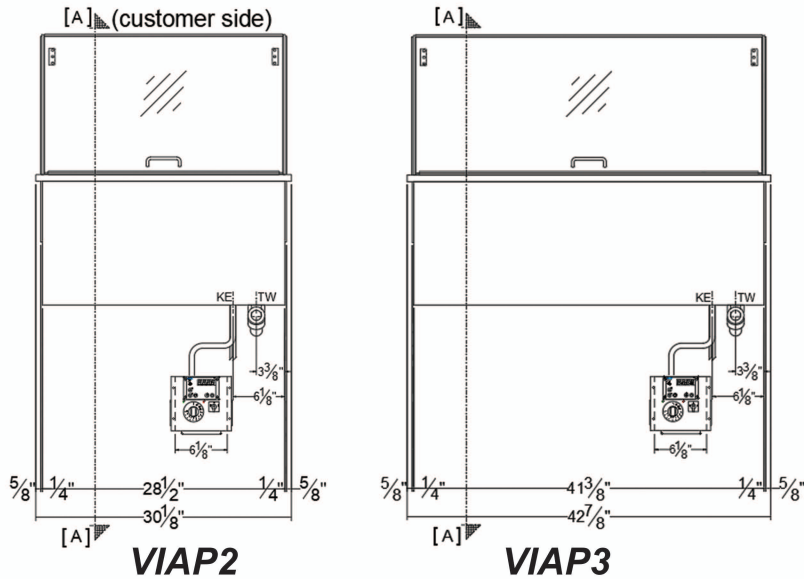

Electrical & Plumbing locations

1 1/8" HOLE REQUIRED FOR COOLING AND DRAINAGE LINES

* 448a refrigeration available at no additional cost - please specify

1. Front glass is lockable in 3 positions with position 1 being for NSF application. position 2 for operator cleaning and position 3 for operator loading. Glass door does not stay open in these positions unless lock is set by operator.
2. A 1 1/8" diameter drain is provided. For remote units, the drain **MUST** be run to a floor drain **AT TIME OF INSTALLATION**. Factory recommends allowing 6-8" underneath unit for proper drainage.
3. Front and Rear ventilation louvers, **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit. Refrigeration System is designed so air will flow rear to front. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
4. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v5_24_23