

# VIENNA VERTICAL COMBO SLANTED

PROJECT: \_\_\_\_\_

ITEM: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

## MODEL # VICC2-R-SL-SC-VC

### SPECIFICATIONS

The Vienna Vertical Combo Series is a combination of a cold grab and go bottom display and a cold service display on top, all with a slanted front profile. The two displays can be operated separately, with different temperature capabilities for top and bottom sections. Each section features its own condensing unit with rear-breathing.

The VICC2-R-SL-SC-VC is entirely made of stainless steel, with printed glass on the left and right side.



Available lengths:  31 1/8"

Available depths:  41 3/4"

Available heights:  60 1/4"

### STANDARD FEATURES

- Slanted Glass Profile
- 304 Stainless Steel Exterior
- Lift-Up Top Glass
- Tempered Glass Front, Top and Side Panels
- (Side glass printed with RAL 9006)
- Top Rear Sliding Access Doors
- Rear Stainless Steel Cutting Utility Board
- Programmable Digital Refrigeration Controllers
- Energy Efficient LED Lighting
- Self-Contained Refrigeration
- Rear Air Ventilation Kit
- Fan Assisted Cooling System (Fan Speed is Adjustable)
- Unique Lift-Up Evaporators
- Adjustable Feet
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 5 Year Compressor Warranty
- Floor Drain Required

### OPTIONAL FEATURES

- Remote Refrigeration
- Ambient shelf in top section
- Powder Coat Exterior
- Rear Door Locks

NOTE: UNIT SHOWN WITH OPTIONAL BLACK POWDER COAT EXTERIOR

Self-Contained	L	D	H	VOLT	AMP	PLUG	WT	REFRIG.
VICC2-R-SL-SC-VC	31 1/8	41 3/4	60 1/4	115/208-230V	13.1	L14-20P	600	R448A

Remote	L	D	H	BTU @ 14 F	VOLT	AMP	PLUG	WT	REFRIG.
VICC2-R-SL-RR-VC	35 3/8	34 1/4	55 1/8	Top: 1041 Bottom: 2816	115V	1.2	5-15P	560	R448A



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

CALL TOLL FREE: 800-525-3692 (609-714-2330)


FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055

**RPI** INDUSTRIES, INC. v10\_19\_23



## MODEL # VICC2-R-SL-SC-VC

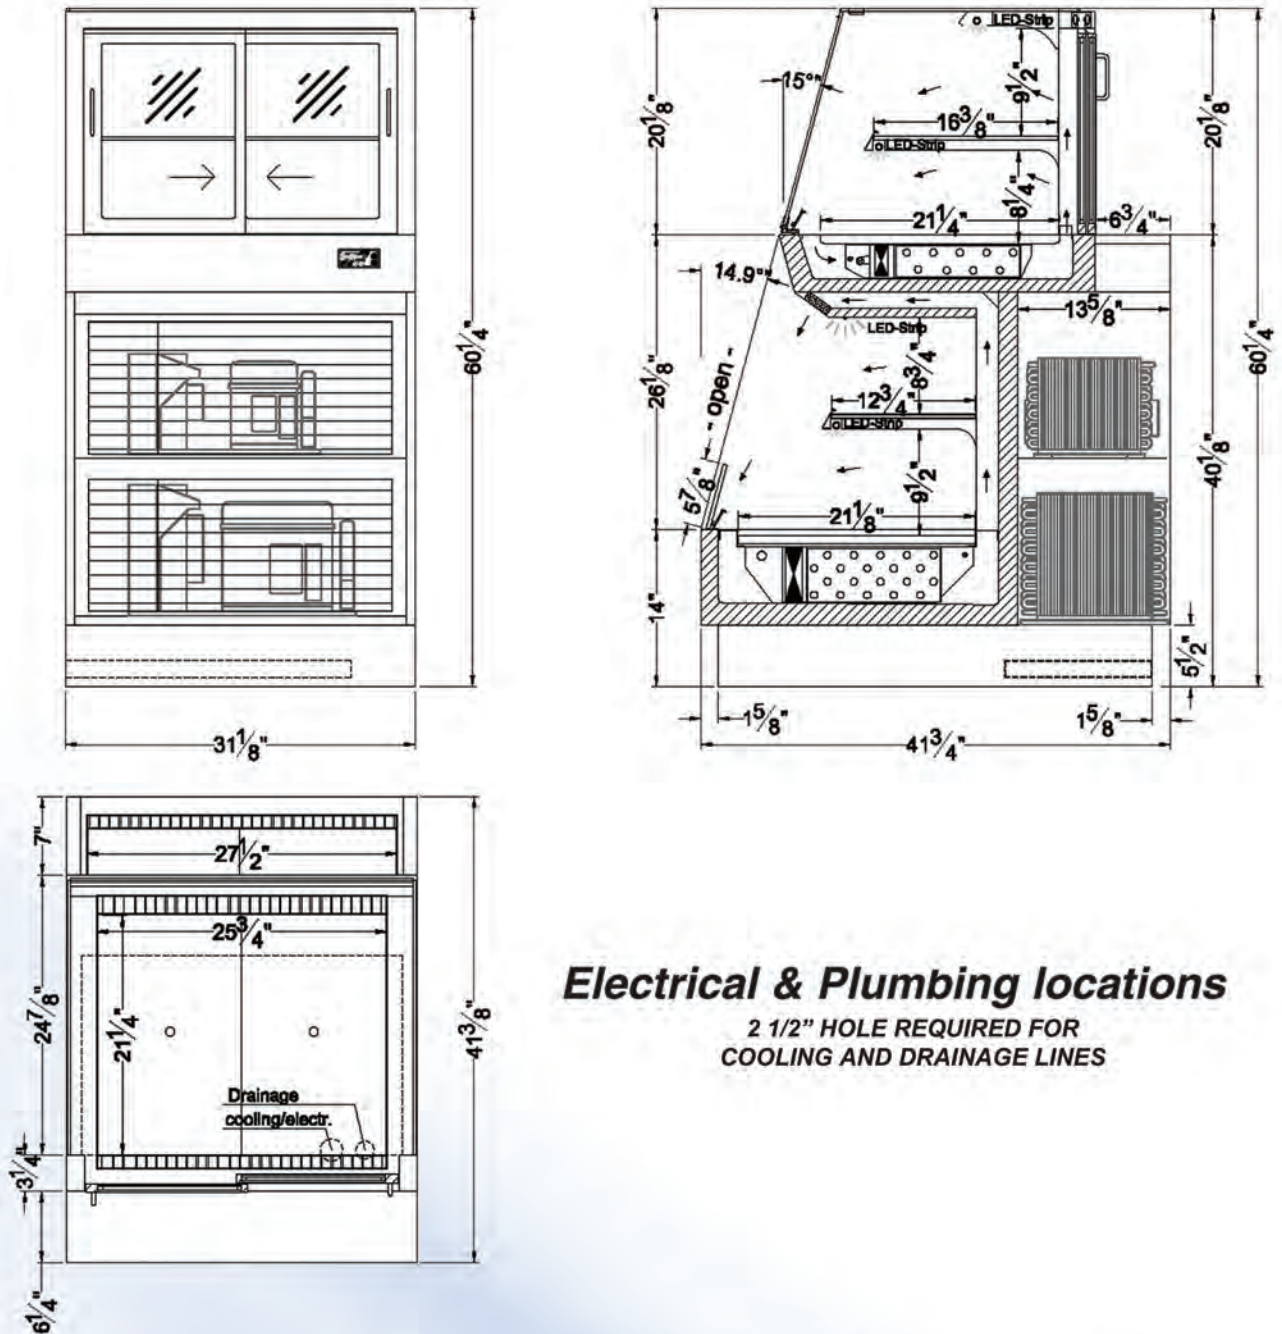

### Electrical & Plumbing locations

2 1/2" HOLE REQUIRED FOR  
 COOLING AND DRAINAGE LINES

1. A 1 1/8" diameter drain is provided. The drain **MUST** be connected to a floor drain or storage container **AT TIME OF INSTALLATION**.
2. Ventilation louvers **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit.
3. For remote units, customer must verify refrigerant at the time of order to ensure proper expansion valve is provided
4. The VICC merchandiser is designed for use in locations where temperatures and humidity do not exceed 75 degrees and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the cases air current and refrigeration zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055