

MODEL # VICD-27-R-SQ-SC-INS-FLAN

SPECIFICATIONS

The Flantastic line is designed to maximize product freshness! Unit offers a uniquely designed coil with variable speed fans, which enables you to achieve very high natural humidity levels for preservation of product. This in-turn provides longer product shelf life!

Available lengths: ☐ 36 1/4" ☐ 52 1/8"

Available depths: ☐ 40 3/4" *

Available heights: ☐ 55 1/2"



STANDARD FEATURES

- Squared Glass Profile
- 304 Stainless Steel Exterior
- Insulated Glass Front, Top and Side Panels
- Energy Efficient LED Lighting
- (2) Flip Down Rear Doors With Mirrored Stainless Steel Interior
- (2) Retractable Tempered Glass Shelves
- Rear Pull-out Drawer With Work Ledge For Easy Access To Deck Pan
- Unique Evaporator for Increased Air Humidity
- Programmable Digital Refrigeration Controller
- Self-Contained Refrigeration
- Rear Air Ventilation Kit
- Fan Assisted Cooling System
- Lift-Up Evaporators
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 5 Year Compressor Warranty
- Built-in Evaporation System (self-contained only)

OPTIONAL FEATURES

- ☐ Remote Refrigeration (Floor Drain Required)
- ☐ Black Powder Coat Exterior Finish
- ☐ Operator Side Accessories (storage/paper tray & knife scraper)
- ☐ Integrations Modular Counter (Consult Factory)
- ☐ Flex Series Paneling Profiles:
 - ☐ FP (Full Front) ☐ HP (Half Front) ☐ HT (Half Tapered)
- ☐ Flex Series Flat Paneling Finish Options:
 - ☐ #4 Brushed Stainless Steel ☐ #8 Mirror Polished Stainless Steel
 - ☐ Laminate ☐ Wood Veneer
- ☐ Adjustable Legs & Casters (Slide-In Units)
 - ☐ 4" Legs ☐ 6" Legs ☐ 8" Legs
 - ☐ 6" Casters

* DEPTH INCLUDES REAR PULL-OUT PRODUCT ACCESS DRAWER

Self Contained	L	D *	H	HP	VOLT	AMPS	PLUG	WT	REFRIG.
VICD2-27-R-SQ-SC-INS-FLAN	36 1/4	40 3/4	55 1/2	1/3	115	6.2	5-15P	550	R448A
VICD3-27-R-SQ-SC-INS-FLAN	52 1/8	40 3/4	55 1/2	1/3	115	6.6	5-15P	650	R448A

Remote	L	D *	H	BTU	VOLT	AMPS	PLUG	WT	REFRIG.
VICD2-27-R-SQ-RR-INS-FLAN	36 1/4	40 3/4	55 1/2	1260	115	0.8	5-15P	510	R448A
VICD3-27-R-SQ-RR-INS-FLAN	52 1/8	40 3/4	55 1/2	1638	115	1.0	5-15P	610	R448A

*Btu/h @ 14°F evap



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

CALL TOLL FREE: 800-525-3692 (609-714-2330)


FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



INDUSTRIES, INC. v10_19_23

MODEL # VICD-27-R-SQ-SC-INS-FLAN

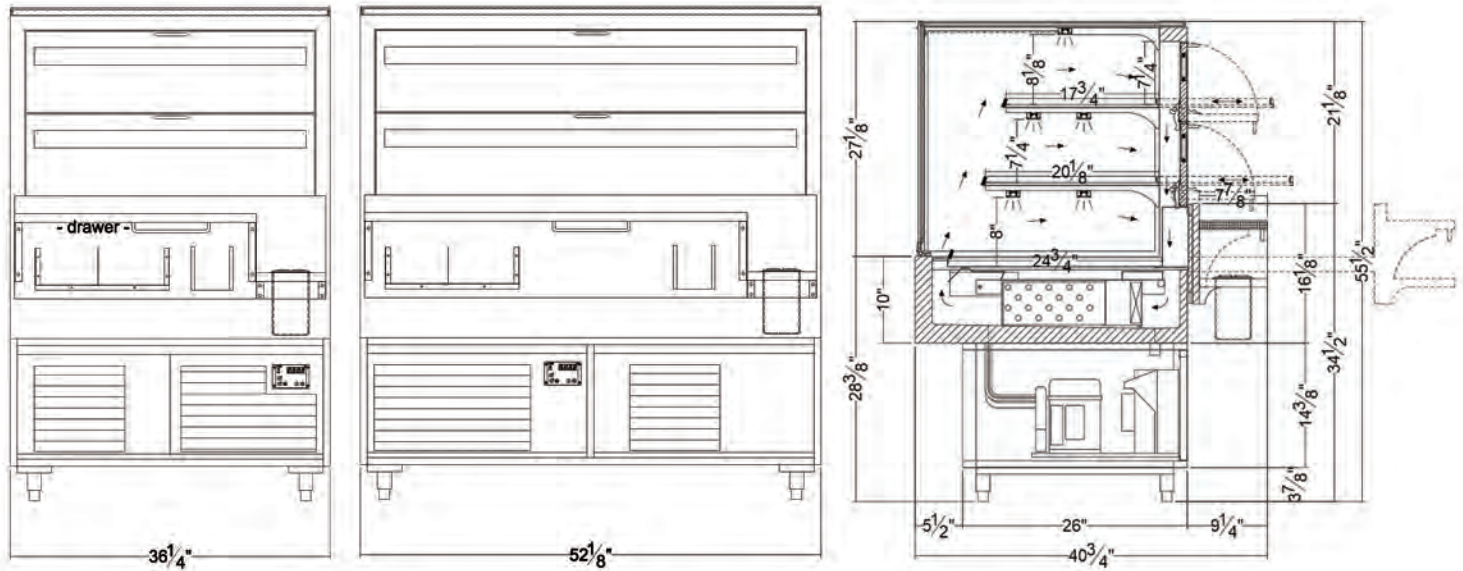


VICD2-27-R-SQ-SC-INS-FLAN

VICD3-27-R-SQ-SC-INS-FLAN

NOTE: Units above shown with optional operator accessories and legs.

Electrical & Plumbing locations

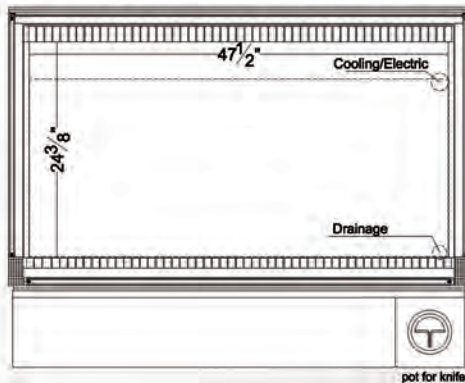

1. A 1 1/8" diameter drain is provided. For remote units the drain **MUST** be connected to a floor drain or storage container **AT TIME OF INSTALLATION**.
2. For self contained units ventilation louvers, **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit.
3. For remote units refrigerant must be verified by customer at the time of order, to ensure proper expansion valve is provided.
4. The VICD-FLAN merchandiser is designed for use in locations where temperatures and humidity do not exceed 75 degrees and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the cases air current and refrigeration zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



INDUSTRIES, INC. v10_19_23