MODEL # VIAP-AT-P

SPECIFICATIONS

The Vienna Series VIAP AT is a drop-in air pan with an air tower, which provides higher air coverage for taller product. This unit is designed for use with platters and serving bowls by incorporating a special baffle and air plenum in the tower to allow more air flow throughout the food zone, not just circulating over the product. Evaporator features a lift-up mechanism that allows the inner pan to be easily rinse clean.



Available lengths: ☐ 30 1/2" ☐ 43 1/4" ☐ 56 1/8" ☐ 68 7/8" ☐ 81 5/8"	
Available depths: 27 7/8"	
Available heights: ☐ 29 1/8" ☐ 31" (VIAP5 & VIAP6 ONLY)	

STANDARD FEATURES

- Baffle and Plenum Packages For Use With Plates/Platters/Serving Bowls.
- Designed For Use With Hotel Pans
- Self-Contained Refrigeration
- 304 Stainless Steel Exterior
- Adjustable Deck Pan to Convert to Slanted Display
- Easy Removable Deck Pans for Cleaning
- Programmable Digital Refrigeration Controller With Variable Speed Fan For Added Optimal Temperature Control
- 3 Sided Air Dam Glass
- Forced Air Cooling System
- Lift-Up Evaporator With Piston System To Hold Open For Internal Cleaning
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 5 Year Compressor Warranty

- Floor Drain Required

OPTIONAL FEATURES

- ☐ Remote Refrigeration
- ☐ Integrations Modular Counter (Consult Factory)
- ☐ LED Lighting
- ☐ Sneeze Guards (Consult Factory)
- ☐ Adapter Bars for Standard Full-Size Pans (Pans Not Included)
- ☐ Black Powder Coat Exterior
- ☐ Powdercoat Colors (See RPI Color Chart)
- ☐ Front Air Ventilation Kit for Units Against Wall *
- ☐ Rear Air Ventilation Kit *
- * FRONT / REAR AIR VENTILATION KITS WILL INCREASE THE TOTAL **HEIGHT OF CHOSEN UNIT BY 17/8"**

MODEL	L	D	Н	PANS	HP	VOLT	AMP	PLUG	WT	REFRIG.	CUT-OUT SIZE
VIAP2-0-R-SC-A	T-P 30 1	1/2 27 7/8	3 29 1/8	2	1/4	115	3.9	5-15P	330	134A	28 3/4 x 26 1/4
VIAP3-0-R-SC-A	T-P 43 1	1/4 27 7/8	3 29 1/8	3	1/3	115	4.7	5-15P	363	134A	41 5/8 x 26 1/4
VIAP4-0-R-SC-A	T-P 56 1	1/8 27 7/8	3 29 1/8	4	3/8	115	6.1	5-15P	429	134A	54 3/8 x 26 1/4
VIAP5-0-R-SC-A	T-P 687	7/8 27 7/8	3 31	5	1/2	115	6.9	5-15P	528	134A	67 1/8 x 26 1/4
VIAP6-0-R-SC-A	T-P 81 5	5/8 27 7/8	3 31	6	1/2	208-230V	3.5	L14-20P	594	134A	66 3/8 x 26 1/4

- 1. A 1" diameter drain is provided. The drain MUST be run to a floor drain AT TIME OF INSTALLATION.
- 2. Ventilation louvers MUST be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit. Refrigeration System is designed so air will flow rear to front. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
- 3. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.








Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

CALL TOLL FREE: 800-525-3692 (609-714-2330) FAX: 609-714-2331 www.rpiindustries.com 220 ROUTE 70, MEDFORD, NJ 08055

PROJECT:

VIENNA AIR PAN w/ AIR TOWER Platter Display TOLL FREE: 800-525-3692

MODEL # VIAP-AT-P



(Rear) Elevation / Section


43¹/₄"

39"

Trap

Control unit / box
(Display can mount up to 6 feet away from control box)
Pull Out Compressor Housing
20⁵/₈"


41³/₈"




VIAP2-0-R-SC-AT-P

VIAP3-0-R-SC-AT-P

VIAP4-0-R-SC-AT-P



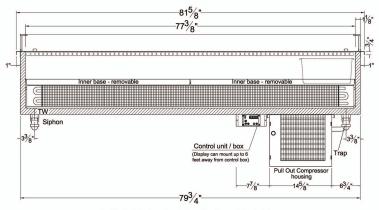



VIAP5-0-R-SC-AT-P

VIAP6-0-R-SC-AT-P

Electrical & Plumbing locations

2 1/2" HOLE REQUIRED FOR COOLING AND DRAINAGE LINES





* 448a refrigeration available at no additional cost - please specify

CALL TOLL FREE: 800-525-3692 (609-714-2330) FAX: 609-714-2331 www.rpiindustries.com 220 ROUTE 70, MEDFORD, NJ 08055

