

VIENNA CALEO COLD DISPLAY

PROJECT: _____
ITEM: _____ **QUANTITY:** _____

MODEL # VIAS-34-R-SL-SC-INS-CAL

SPECIFICATIONS

The Vienna Caleo series Cold Display is a slanted lower profile air screen with built-in hot gas condensate evaporation system (self-contained), so a floor drain is not required. This unit features (2) glass shelves, LED lighting and a pull-down night shade. This unit is offered in several sizes and designed for a variety of applications; back-to-back, wall mounted, front line or as part of an island merchandiser with other Caleo models.

- Available lengths:** 23 5/8" 31 1/2" 47 1/4"
Available depths: 26"
Available heights: 55 1/2"



Unit shown in optional black powder coat finish and wood paneling

STANDARD FEATURES

- Self-contained refrigeration
- Stainless steel exterior
- Stainless steel perforated rear interior
- Slanted glass profile
- Insulated glass end
- (2) tempered glass shelves
- LED lighting
- Front air dam glass
- Removable stainless deck pans for cleaning
- Air cooled system with variable speed fan
- Lift-up evaporator
- Programmable digital refrigeration controller
- Front air intake
- Air discharge through rear ducts
- Manual pull-down night curtain
- Adjustable feet & casters
- Hot gas evaporation system (self-contained only)
- 5-year compressor warranty
- ETL listed in accordance with UL 471 & NSF 7 standards

OPTIONAL FEATURES

- Remote Refrigeration (Floor Drain Required)
- Powder Coat Exterior Finish
- VIAS4 size available (Contact Factory)
- Rear Air Duct (for back to back or wall units)
- Full Flex Series Panels
- Flex Series Panel Finish Options
 - Laminate
 - #4 Brushed Stainless Steel
 - #8 Mirror Polished Stainless
 - Wood Veneer

SELF CONTAINED	L	D	H	HP	VOLT	AMPS	PLUG	WT	REFRIG.
VIAS1-34-R-SL-SC-INS-CAL	23 5/8	26	55 1/2	1/2	115V	9.5	5-15P	345	R448A
VIAS2-34-R-SL-SC-INS-CAL	31 1/2	26	55 1/2	1/2	115V	9.5	5-15P	437	R448A
VIAS3-34-R-SL-SC-INS-CAL	47 1/4	26	55 1/2	7/8	208-230V	7.7	L14-20P	530	R448A

REMOTE	L	D	H	BTU	VOLT	AMPS	PLUG	WT	REFRIG.
VIAS1-34-R-SL-RR-INS-CAL	23 5/8	26	55 1/2	2701	115V	1.5	5-15P	305	R448A
VIAS2-34-R-SL-RR-INS-CAL	31 1/2	26	55 1/2	3189	115V	1.7	5-15P	397	R448A
VIAS3-34-R-SL-RR-INS-CAL	47 1/4	26	55 1/2	6384	115V	1.9	5-15P	490	R448A










Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

CALL TOLL FREE: 800-525-3692 (609-714-2330)
 FAX: 609-714-2331 www.rpiindustries.com
 220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v10_19_23

MODEL # VIAS-34-R-SL-SC-INS-CAL

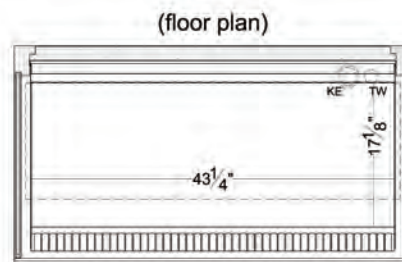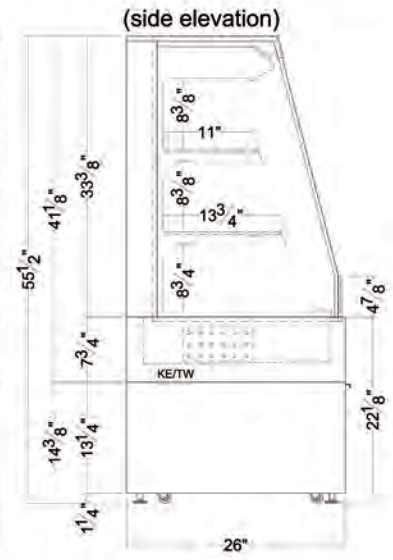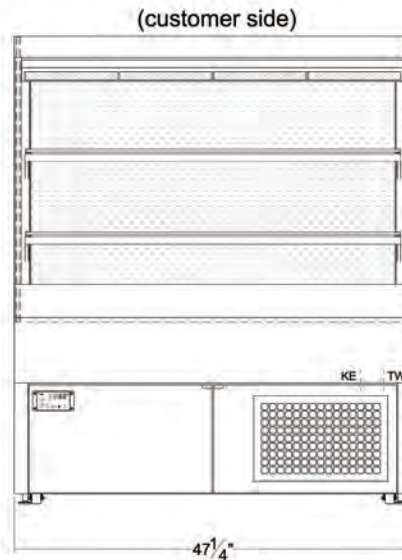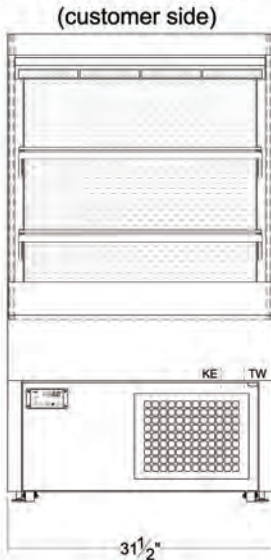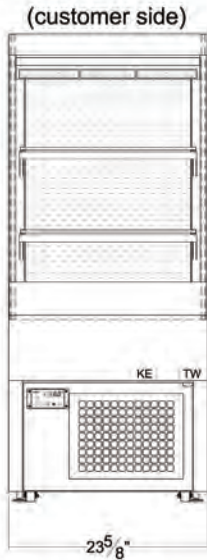


VIAS1-34-R-SL-SC-INS-CAL

VIAS2-34-R-SL-SC-INS-CAL

VIAS3-34-R-SL-SC-INS-CAL

37⁸/₈"

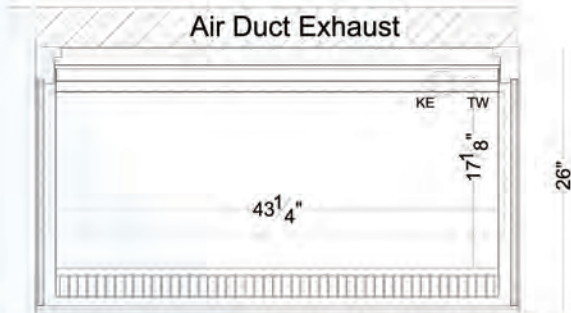

(Exhaust air duct is required for wall installation)

4" clearance is required for back to back units or if going up against a wall. Rear air duct will be provided by factory at no extra charge upon request. Please specify if air duct will be required when ordering.

1. Ventilation louvers, **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit.
2. The VIAS-CAL merchandiser is designed for use in locations where temperatures and humidity do not exceed 75 degrees and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the cases air current and refrigeration zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055