VIENNA CAFE SERIES

PROJECT:	
ITEM:	QUANTITY:

MODEL # VICD3-24-R-SQ-SC INS (M) CAFE

SPECIFICATIONS

The Vienna Cafe Series VICD-SQ INS (M) CAFE offers a customized Cold Display and Air Screen with a new radius style insulated glass. Built without adding stainless trim on edging, this series features maximum visual appeal for merchandising!

Available lengths: 51 5/8" Available depths: 39" Available (above counter) heights: 25 1/2"

STANDARD FEATURES

- Unique Curved Glass Profile
- 304 Stainless Steel Exterior
- Insulated Glass Front (VICD Only), Top and Side Panels
- Insulated Tilt-Out Front Glass (VICD)
- Energy Efficient LED Lighting
- Middle Shelf (Refrigerated)
- Top Shelf (Non Refrigerated)
- Hinged Rear See-Through Access Door (VIAS)
- Sliding Rear See-Through Access Doors (VICD)
- Easy Removable Deck Pans for Cleaning
- Programmable Digital Refrigeration Controller
- Self-Contained Refrigeration with Integrated Compressor Housing
- Rear Slide-Out Refrigerated Access Drawers
- Rear Air Ventilation Kit
- Fan Assisted Cooling System
- Lift-Up Evaporator
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 5 Year Compressor Warranty
- Floor Drain Required

OPTIONAL FEATURES

- □ Remote Refrigeration
- □ Flex Series Paneling Profiles:
- \Box *HF* (Half Full) \Box *HT* (Half Tapered)
- □Flex Series Flat Paneling Finish Options:
- □ #4 Brushed Stainless Steel □ #8 Mirror Polished Stainless Steel □ Laminate □ Wood Veneer
- □Adjustable Legs & Casters (Slide-In Units)
 - $\Box 6"$ Legs $\Box 8"$ Legs
- □6" Casters

MODEL	L	D	Н	HP	VOLT	AMPS	PLUG	WT	REFRIG (V/CD).	REFRIG (VIAS).
VICD3-24-R-SQ-SC INS (M) CA	FE 51 5/8	39	25 1/2	1/2	115	15.0	5-15P	800	134A	404A



RPIINDUSTRIES, INC. v5_25_23

Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

CALL TOLL FREE: 800-525-3692 (609-714-2330) FAX: 609-714-2331 www.rpiindustries.com 220 ROUTE 70, MEDFORD, NJ 08055

Vienna Cafe Series



25/2

duct


air

291/8

2018


QUANTITY:

MODEL # VICD3-24-R-SQ-SC INS (M) CAFE

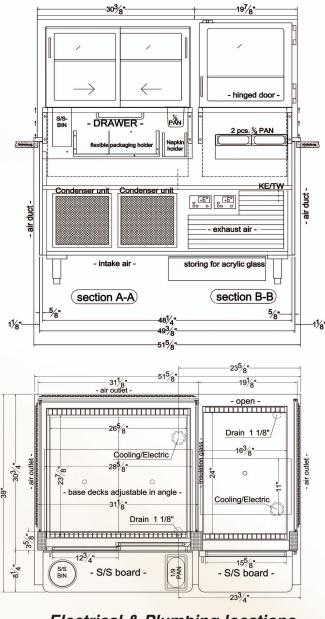

Electrical & Plumbing locations 2 1/2" HOLE REQUIRED FOR **COOLING AND DRAINAGE LINES**

UNIT SHOWN WITH "REAR AIR BREATHING" & OPTIONAL LEGS



- 1. A 1"diameter drain is provided. The drain MUST be connected to a floor drain or storage container AT TIME OF INSTALLATION.
- 2. Rear ventilation louvers, each at least 25" W x 20" H, MUST be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit.
- 3. The VIENNA CAFE merchandiser is designed for use in locations where temperatures and humidity do not exceed 75 degrees and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the cases air current and refrigeration zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com 220 ROUTE 70, MEDFORD, NJ 08055



VIENNA COLD DISPLAY 4/8

S/S board

