

MODEL # VICD1-34-R-SQ-SC



SPECIFICATIONS

The Vienna Multi Deck series offers a larger capacity of display with a compact footprint at an incredible value! Full glass front and sides with extended solid end panels enable the unit to easily fit within serving counters!

Available lengths: 19 5/8"

Available depths: 30 3/8"

Available heights: 54 3/4"

STANDARD FEATURES

- Squared Glass Profile
- 304 Stainless Steel Exterior
- Tilt-Out Front Glass
- Tempered Glass Front, Top and Side Panels
- Partial Removable #8 Stainless Steel Side Panels
- Hinged Rear Access Door
- Pull-Out Base Tray
- Programmable Digital Refrigeration Controller
- Energy Efficient LED Lighting
- Self-Contained Refrigeration
- Rear to Front Air Ventilation Kit
- Fan Assisted Cooling System (Fan Speed is Adjustable)
- Lift-Up Evaporator
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 5 Year Compressor Warranty
- Automatic evaporation via hot gas

OPTIONAL FEATURES

- Remote Refrigeration
- Flex Series Paneling Profiles:
 - HF (Half Full) HT (Half Tapered)
- Flex Series Flat Paneling Finish Options:
 - #4 Brushed Stainless Steel #8 Mirror Polished Stainless Steel
 - Laminate Wood Veneer
- Adjustable Legs & Casters (Slide-In Style Units)
 - 6" Legs 8" Legs 6" Casters

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
VICD1-34-R-SQ-SC MD	19 5/8	30 3/8	54 3/4	1/3	115	5.7	5-15P	600	134A



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120


CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com


220 ROUTE 70, MEDFORD, NJ 08055

MODEL # VICD1-34-R-SQ-SC


(REAR VIEW)

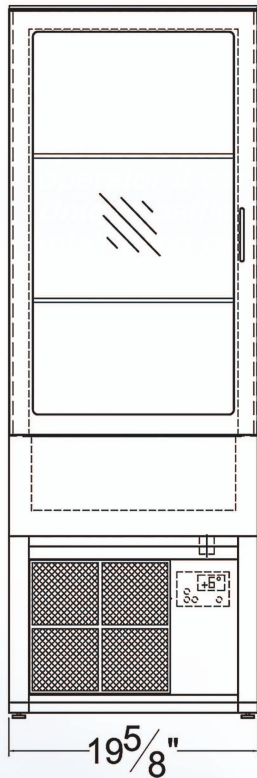


(SECTION VIEW SIDE)

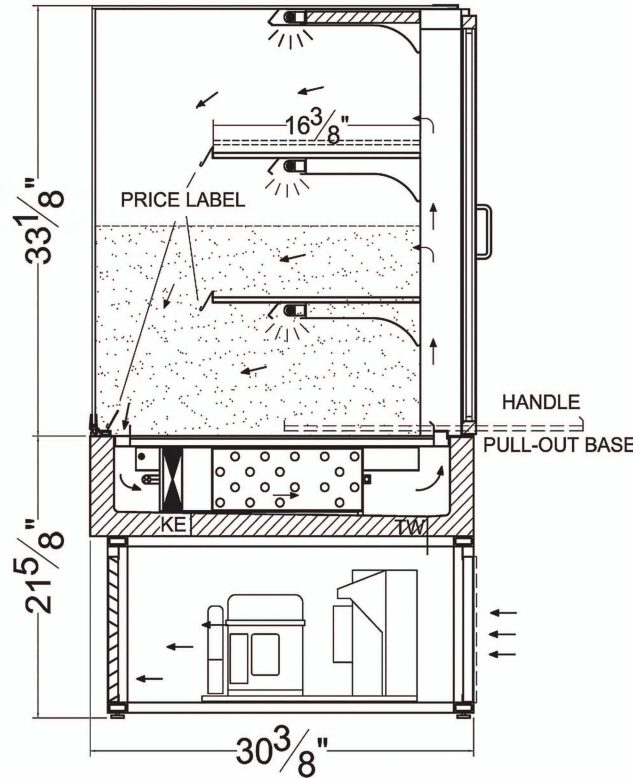

(FRONT VIEW)

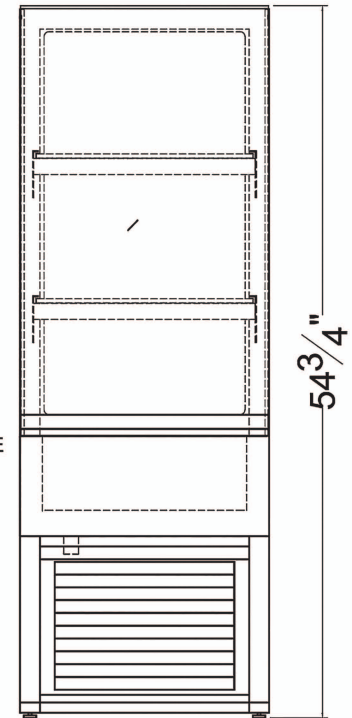

(SECTION TOP)

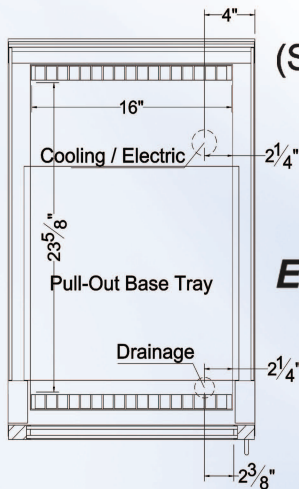

Electrical & Plumbing locations

2 1/2" HOLE REQUIRED FOR COOLING AND DRAINAGE LINES

* 448a refrigeration available at no additional cost - please specify

1. A 1" diameter drain is provided. The drain **MUST** be connected to a floor drain or storage container **AT TIME OF INSTALLATION**.
 2. Rear ventilation louvers **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit.
 3. The VICD MD merchandiser is designed for use in locations where temperatures and humidity do not exceed 75 degrees and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the cases air current and refrigeration zone within. Any adverse field conditions stated above will void warranty.
- RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055