

MODEL # VIAP3-0-R-SC-LS

SPECIFICATIONS

The Vienna Series – Lazy Susan VIAP3-0-R-SC-LS air over refrigerated circular pan design features manual push/pull handles. Unit is constructed in all stainless steel, and is available with options for a vertical shield or sneeze guard, and is adjustable for slanted or flat presentation.

Available in self-contained or remote refrigeration.



Available lengths: ☐ 47 1/4"
Available depths: ☐ 47 1/4"
Available heights: ☐ 36 15/16"

STANDARD FEATURES

- Stainless steel exterior and interior
- Interior pull/push handles for manual rotation
- 4" plexi glass surround
- Programmable digital display controller
- Self Contained refrigeration with integrated compressor housing
- Rear air breathing
- ETL listed in accordance with UL 471 and NSF 7 standards
- Environmentally safe refrigerant
- 5 Year Compressor Warranty
- Floor Drain Required

OPTIONAL FEATURES

- ☐ Remote refrigeration
- ☐ Stainless steel adjustable legs / casters
- ☐ Condensate evaporator pan
- ☐ Flex series paneling system
- ☐ Energy efficient LED strip lights (Available non-spinning only)
- ☐ Center sneeze guard canopy (contact factory)

MODEL	L	D	H	VOLT	AMP	PLUG	WT	REFRIG.
VIAP3-0-R-SC-LS	47 1/4	47 1/4	36 15/16	115	6.1	5-15P	540	R448A

1. A 1" diameter drain is provided. The drain **MUST** be run to a floor drain **AT TIME OF INSTALLATION**.
2. Front and Rear ventilation louvers, **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit. Refrigeration System is designed so air will flow rear to front. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
3. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com


220 ROUTE 70, MEDFORD, NJ 08055



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120



RPI INDUSTRIES, INC. v10_19_23

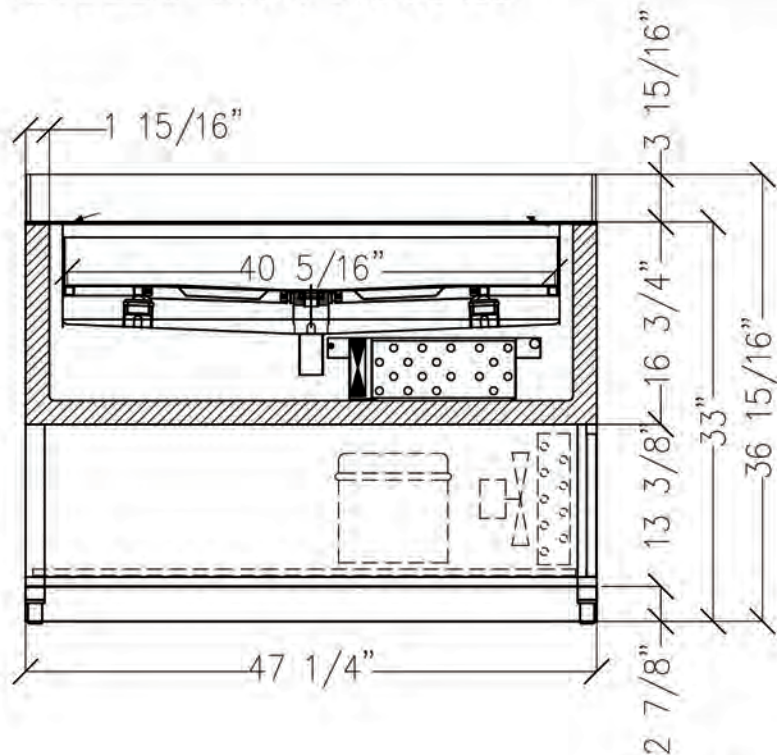

Electrical & Plumbing locations

**2 1/2" HOLE REQUIRED FOR
COOLING AND DRAINAGE LINES**

