

VIENNA LOB-AIR PAN

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL # VIAP LOB

SPECIFICATIONS

The Vienna Series VIAP LOB air pan is the ultimate in food presentation by offering a non-recessed refrigerated area that can be covered in quartz stone or solid surface material (MUST SPECIFY). The rear air plenum allows the refrigerated air pattern to "LOB" over the product up to 2 1/2 inches high. The unit is constructed in stainless steel, with a lift-up evaporator coil for easy cleaning.

Available lengths: ☐ 31 7/8" ☐ 47 1/8"

Available depths: ☐ 31 3/4"

Available heights: ☐ 17 7/8"



STANDARD FEATURES

- Presents Goods with a Maximum Height of 2 1/2"
- Grade A Solid Surface
- (3) 6 Inch Air Dam Glass Panels (Front / Customer side and sides)
- Flush Presentation of Products (Vent Ducts in Front and Rear and 1/8" gaps on side are visible in counter top)
- Programmable Digital Refrigeration Controller
- Self-Contained Refrigeration with Pull-Out Compressor Housing
- Fan Assisted Cooling System (Fan Speed is Adjustable)
- Lift-Up Evaporator
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 5 Year Compressor warranty
- Floor Drain Required

OPTIONAL FEATURES

- ☐ Remote Refrigeration
- ☐ Quartz Stone Surface
- ☐ 4th 6 Inch Air Dam (Rear / Operator Side) Glass Panel
- ☐ Other Depths Upon Request
- ☐ Multiplex Enabled (Arrange multiple units side by side for one long display)
- ☐ Rear breathing
- ☐ Front breathing

NOTE: UNIT CANNOT BE SOLD AS A "DROP-IN" MUST BE BUILT INTO RPI MILLWORK TO FUNCTION PROPERLY UNITS REQUIRE AIR DAM GLASS PANELS

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.	CUT-OUT SIZE
VIAP2-0-R-SC LOB	31 7/8	31 3/4	17 7/8	1/3	115	4.7	5-15P	290	R448A	31 7/8 X 27 3/4
VIAP3-0-R-SC LOB	47 1/8	31 3/4	17 7/8	3/8	115	6.1	5-15P	350	R448A	47 7/8 X 27 3/4

1. A 1" diameter drain is provided. The drain **MUST** be run to a floor drain **AT TIME OF INSTALLATION**.
2. Front and Rear ventilation louvers **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit. Refrigeration System is designed so air will flow rear to front. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
3. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055






RPI INDUSTRIES, INC. v10_19_23

VIENNA LOB-AIR PAN


MODEL # VIAP LOB

PROJECT:

TOLL FREE: 800-525-3692

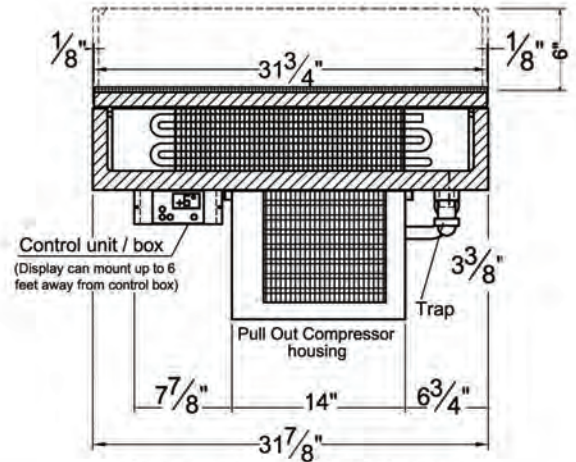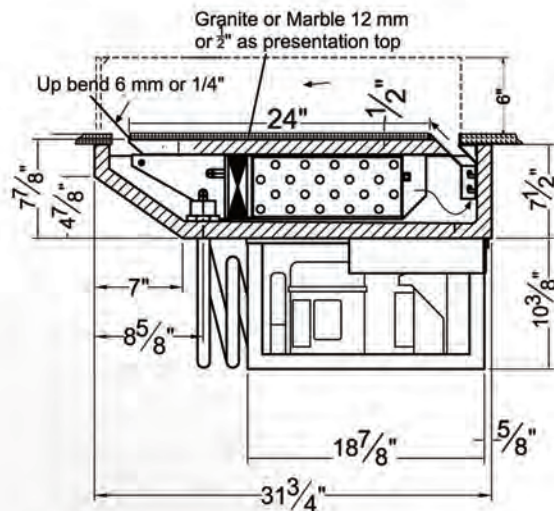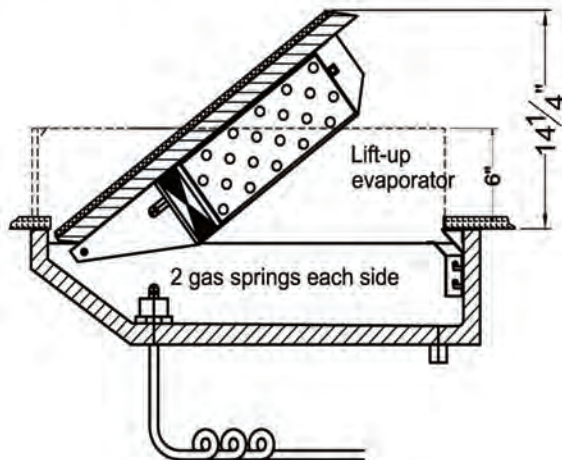


VIAP2-0-R-SC LOB

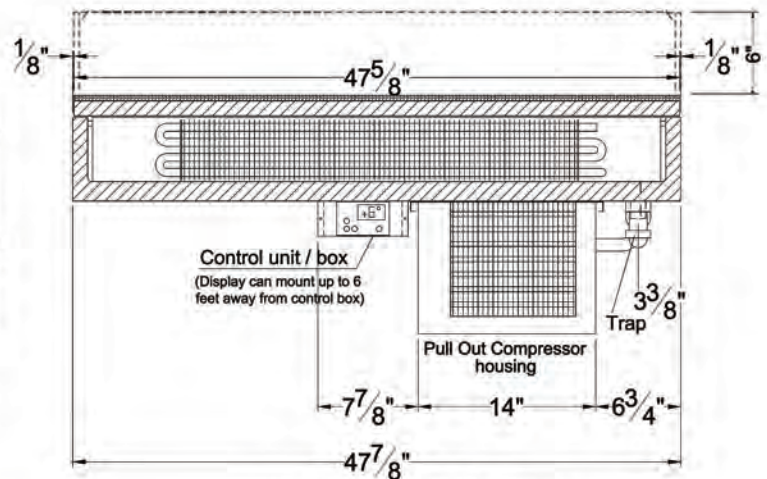

VIAP3-0-R-SC LOB

Electrical & Plumbing locations

2 1/2" HOLE REQUIRED FOR COOLING AND DRAINAGE LINES

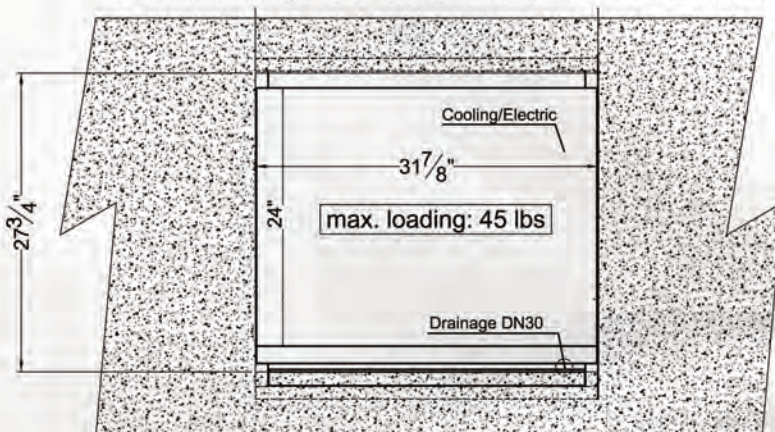

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



RPI INDUSTRIES, INC. v10_19_23