

**MODEL # VICD2+2-20-R-SQ-SC-INS-FLAN**

**SPECIFICATIONS**

The Vienna Series VICD-FLAN Next Generation FCT is a service display offering a uniquely designed coil with variable speed fans, which provide a high natural humidity level for preservation of product. With a humidity level of 85% and two independent temperature zones, the FCT, can be used in a variety of food and bakery applications. With high quality features such as mirrored rear door flaps, LED lights and frameless insulated glass, this display will allow any product to stand out. And features like easy slide out shelves, lift up evaporator, tilt out front glass, lift up top glass and a common divider glass offers easy cleaning and product loading.

Available lengths: ☐ 71 5/8"

Available depths: ☐ 31 1/2"

Available heights: ☐ 49 1/4"



Unit is shown with optional black powder coat finish.

**STANDARD FEATURES**

- Self-contained refrigeration
- Flantastic coil for increased natural humidity
- Two independent temperature zones
- Stainless steel interior & exterior
- Squared frameless insulated glass profile
- Liftable top glass & tiltable front glass for easy cleaning
- Insulated divider glass between both units
- Glass vision panels in the rear door flaps
- (1) retractable tempered glass shelf
- Retractable base deck
- LED lighting
- Lift-up evaporator
- Air cooling system with variable speed fan
- Programmable digital refrigeration controller
- Base with rear breathing kit
- Adjustable feet and casters
- Built in condensate evaporator system (self-contained)
- 5 year compressor warranty
- ETL listed in accordance with UL 471 & NSF 7 standards

**OPTIONAL FEATURES**

- ☐ Remote refrigeration
- ☐ Powder coat finish
- ☐ R448A Refrigerant
- ☐ Undercounter refrigeration storage (remote only)

SELF CONTAINED	L	D	H	HP	VOLT	AMPS	PLUG	WT	REFRIG.
VICD2+2-20-R-SQ-SC-INS-FLAN	71 5/8	31 1/2	49 1/4	2x3/8	(2x)115	(2x)8.2	(2x)5-15P	739	R448A

REMOTE	L	D	H	BTU	VOLT	AMPS	PLUG	WT	REFRIG.
VICD2+2-20-R-SQ-RR-INS-FLAN	71 5/8	31 1/2	49 1/4	1775	(2x)115	(2x)2.0	(2x)5-15P	670	R448A

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055




Conforms to UL Standard 471,  
and NSF Standard 7; Certified  
To CSA Standard C22.2 No.120


**RPI INDUSTRIES, INC.** v10\_19\_23

## MODEL # VICD2+2-20-R-SQ-SC-INS-FLAN


(operator side)

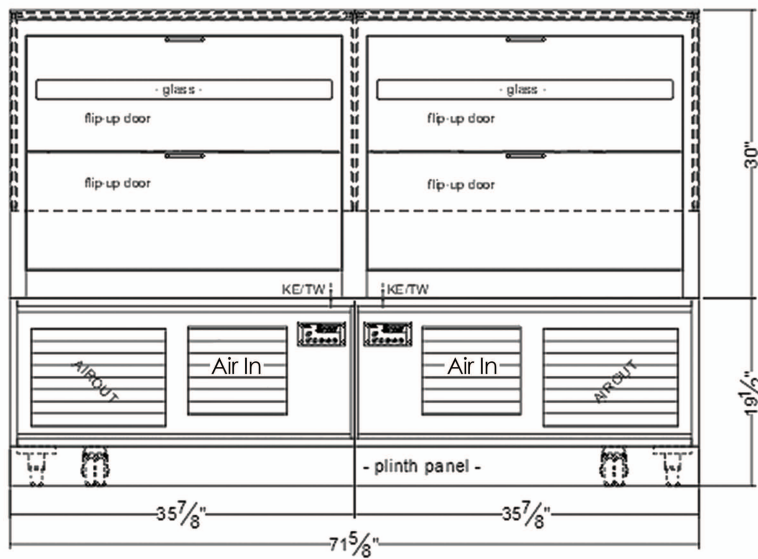

(side elevation)

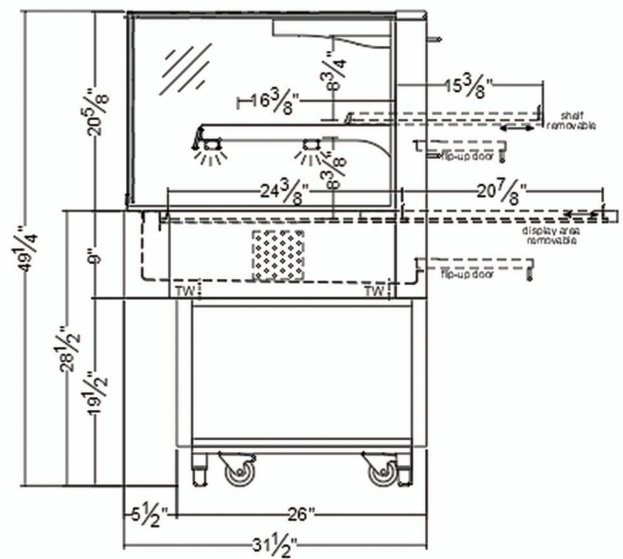

(floor plan)

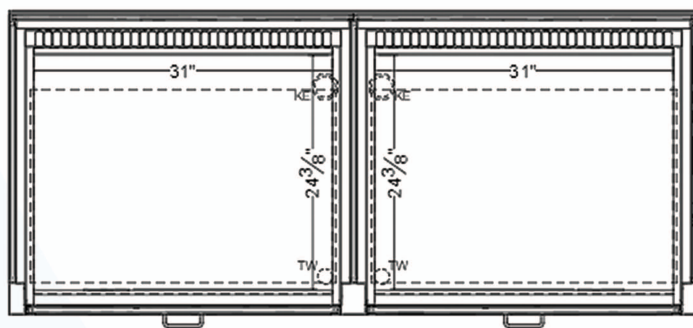

1. Ventilation louvers, **MUST** be provided in the cabinet or counter and located so to provide full ventilation for the condensing unit.
2. The VICD2+2-20-R-SQ-SC-INS-FLAN merchandiser is designed for use in locations where temperatures and humidity do not exceed 75 degrees and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the cases air current and refrigeration zone within. Any adverse field conditions stated above will void warranty.
3. Unit to ship as two cases and be installed together on site.

RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055

**RPI INDUSTRIES, INC.** v10\_19\_23