

## MODEL # VICD-CV CT CURVED GLASS

### SPECIFICATIONS

The Vienna Series VICD-CV CT is a refrigerated full service display style unit designed for counter top application, featuring insulated curved front glass, top and side panels. Units are standard in stainless steel with an adjustable shelf, LED lights and sliding rear see-through access doors.



**Available lengths:**  31 1/2"  44 1/4"  
**Available depths:**  32 5/8" (Self-Contained)  23 3/8" (Remote)  
**Available heights:**  28 3/8"

### STANDARD FEATURES

- Curved Glass Profile
- 304 Stainless Steel Exterior
- Insulated Glass Front, Top and Side Panels
- Sliding Rear See-Through Access Doors
- (1) Adjustable / tiltable Glass Shelf with LED Light
- Easy Removable Deck Pans for Cleaning
- Programmable Digital Refrigeration Controller
- Self-Contained Refrigeration with Rear Compressor Housing
- Fan Assisted Cooling System
- Lift-Up Evaporator
- Tilt-Out Front Glass
- 6' Cord & Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 5 Year Compressor Warranty
- Built in Condensate Evaporator Pan (No Floor Drain Required)

### OPTIONAL FEATURES

- Remote Refrigeration
- Mirrored Sliding Rear Access Doors
- Rear Door Locks
- Flip-up Doors For Self-Service
- Powder Coat Finish

Self-Contained	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
VICD2-20-R-CV-SC-CT	31 1/2	32 5/8	28 3/8	1/4	115	3.8	5-15P	440	R448A
VICD3-20-R-CV-SC-CT	44 1/4	32 5/8	28 3/8	1/3	115	4.8	5-15P	484	R448A
Remote	L	D	H	BTU	VOLT	AMP	PLUG	WT	REFRIG.
VICD2-20-R-CV-RR-CT	31 1/2	23 5/8	28 3/8	1139	115	0.8	5-15P	420	R448A
VICD3-20-R-CV-RR-CT	44 1/4	23 5/8	28 3/8	1380	115	1.0	5-15P	464	R448A

\*Btu/h @14°F evap

CALL TOLL FREE: 800-525-3692 (609-714-2330)  
 FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)  
 220 ROUTE 70, MEDFORD, NJ 08055




Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No. 120

# VIENNA COUNTER TOP COLD DISPLAY CURVED

**PROJECT:**  
**TOLL FREE: 800-525-3692**


## MODEL # VICD-CV CT CURVED GLASS

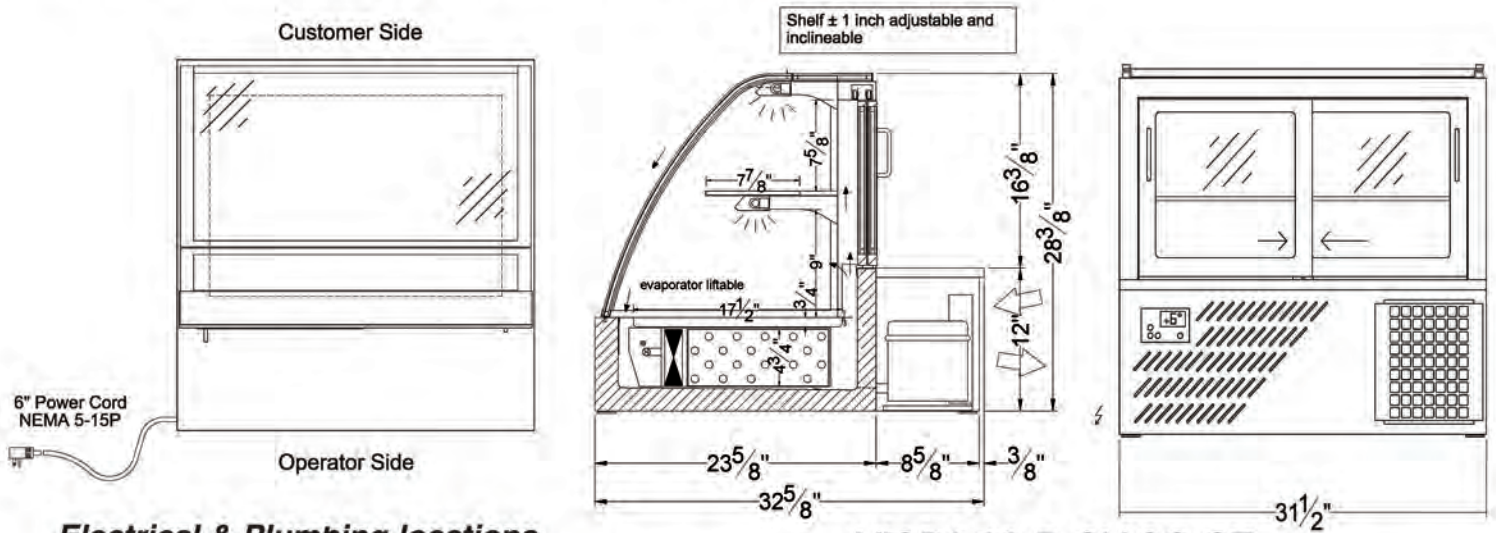

### Electrical & Plumbing locations

2 1/2" HOLE REQUIRED FOR COOLING AND DRAINAGE LINES

**VICD2-20-R-CV-SC-CT**

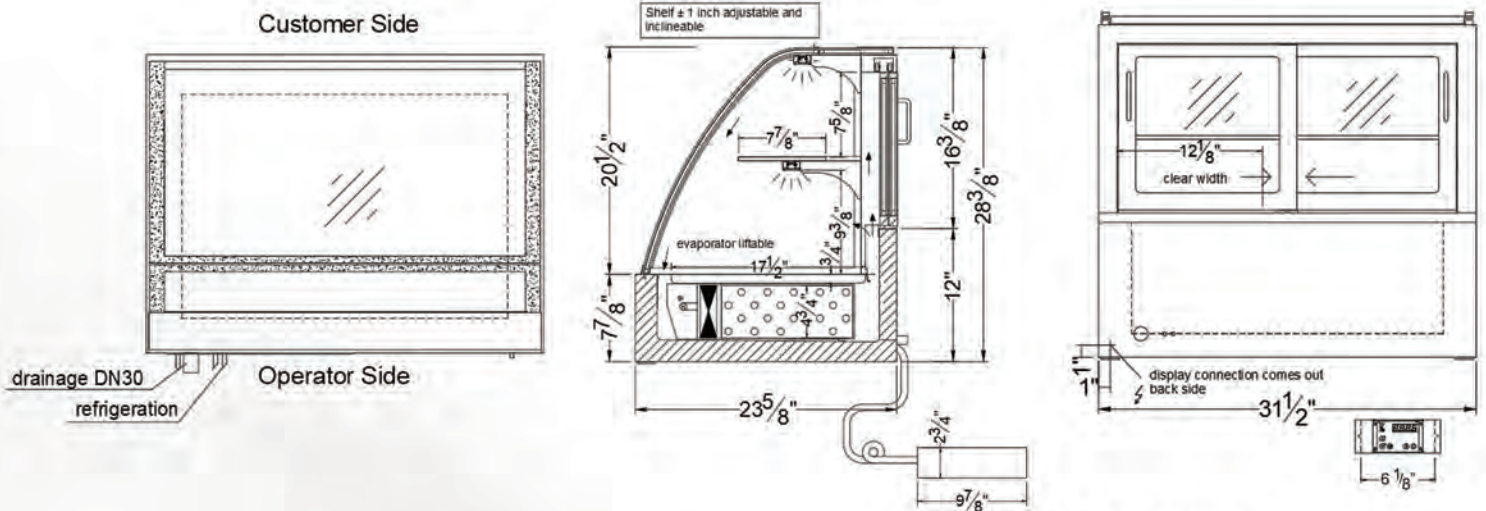

**VICD2-20-R-CV-RR-CT**

RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55%RH. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone.

Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrass Fahrenheit can affect the temperature of the entire cabinet. Any adverse field conditions stated above will void warranty.

For remote units,refrigerant must be verified by customer at the time of order to ensure proper expansion valve is provided.

RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.rpiindustries.com](http://www.rpiindustries.com)

220 ROUTE 70, MEDFORD, NJ 08055

**RPI** INDUSTRIES, INC. v10\_19\_23